

Product Features

- Integrated Monolithic GaAs Converter Package Module
- High Reliability
- Lower Manufacturing Cost
- Higher Productivity
- Very Low Noise Figure & Low Distortion
- Very Low Phase Noise (Ceramic Resonator used)
- Pb Free / RoHS Standard



Package Type: HY-5A

Description

Cellular Converter is a very compact size due to using simple matching circuit board including PLL circuits. Customers can apply this part to Cellular systems.

Application


- Repeater
- Base Station

Specifications







(Operating Temperature: -30°C~+80°C)

| PARAMETER | RFUR08-50 (Rx-Up) | RFDR08-51 (Rx-Down) | RFDR08-55 (Tx-Down) | RFUR08-56 (Tx-Up) |
|---|---|---|---|---|
| Input Frequency Range (MHz)(BW:30MHz) | 70 (IF) | 824~849 (RF) | 869~894 (RF) | 70 (IF) |
| Output Frequency Range (MHz) | 824~849 (RF) | 70 (IF) | 70 (IF) | 869~894 (RF) |
| Conversion Gain (dB) | 8±1 | 9±1 | 9±1 | 8±1 |
| LO Frequency Range (MHz) | 754~779 | 754~779 | 939~964 | 939~964 |
| Gain Flatness@50MHz (dB) (Max.) | ±1 | ±1 | ±1 | ±1 |
| Noise Figure (Typ)(dB) | 6 | 6 | 10 | 10 |
| OIP3 (Typ)(dBm) | 26 | 28 | 28 | 26 |
| LO to RF Leakage (dBm) | -10 | -20 | -20 | -10 |
| LO to IF Leakage (dBm) | -20 | -20 | -20 | -20 |
| RF to IF / IF to RF Leakage (dBm) | -20 | -20 | -20 | -20 |
| LO Output Level (dBm) | 4±1 | 4±1 | 4±1 | 4±1 |
| LO Phase Noise (Typ) Step Size : 10KHz | -65dBc/Hz @1KHz -95dBc/Hz @10KHz -115dBc/Hz @100KHz | -65dBc/Hz @1KHz -95dBc/Hz @10KHz -115dBc/Hz @100KHz | -65dBc/Hz @1KHz -95dBc/Hz @10KHz -115dBc/Hz @100KHz | -65dBc/Hz @1KHz -95dBc/Hz @10KHz -115dBc/Hz @100KHz |
| PLL Control (LMX2326) | 3 wire | 3 wire | 3 wire | 3 wire |
| Vcc / Idd | 5V / 170mA | 5V / 170mA | 5V / 170mA | 5V / 170mA |







Functional Diagram

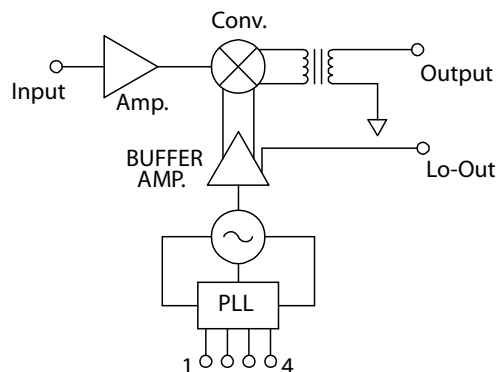

RFUR08-50, 56 OIP3 TEST (Up Converter)

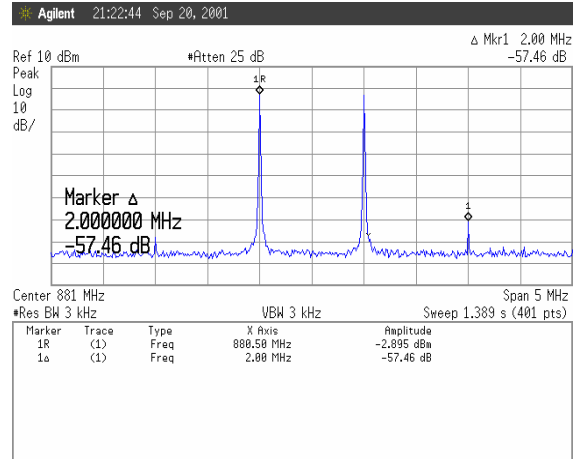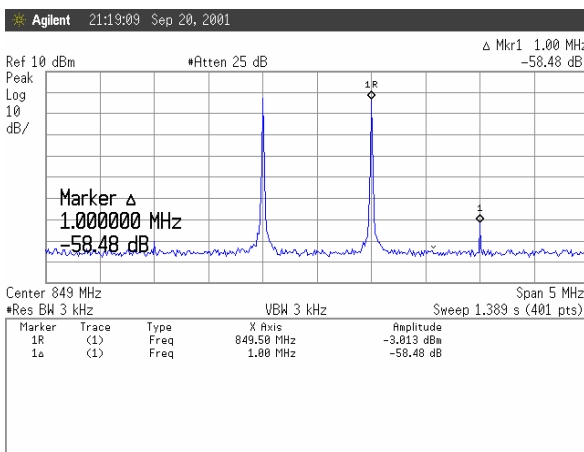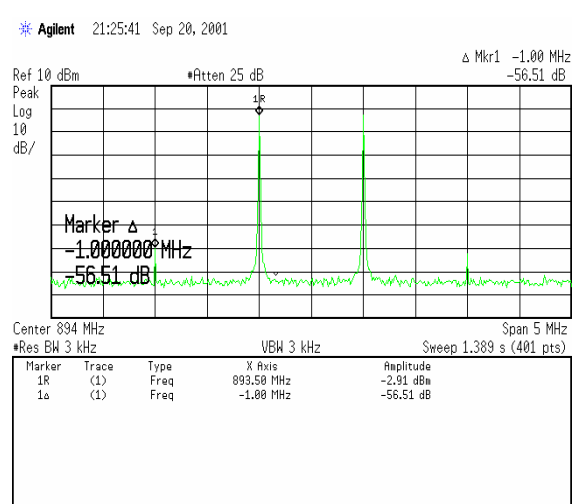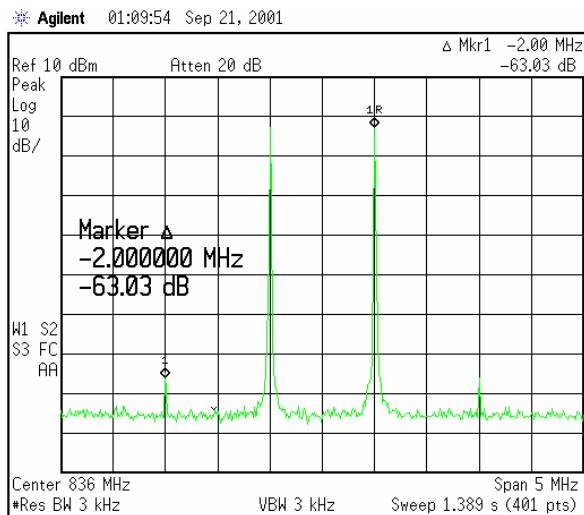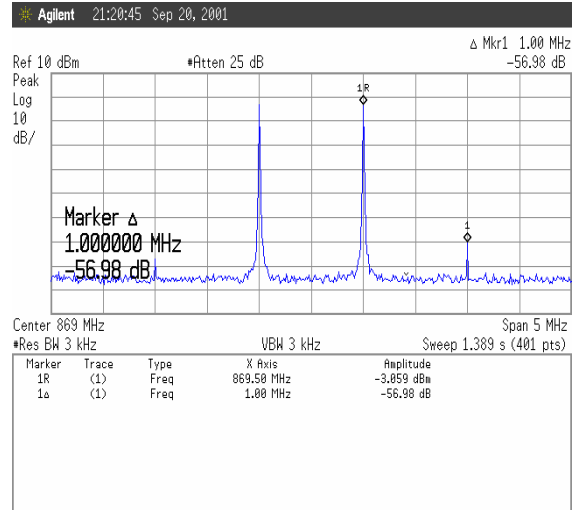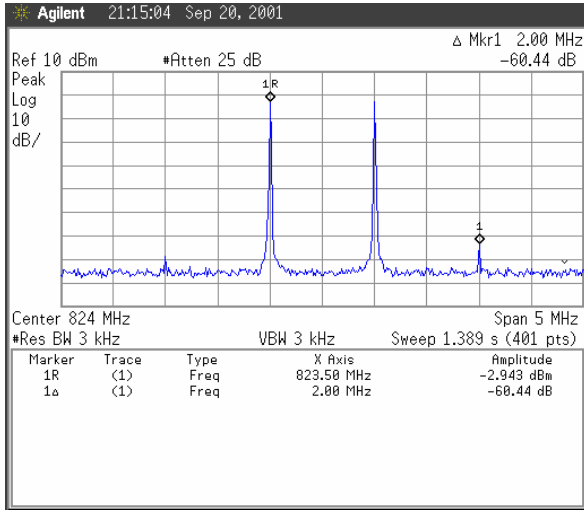


RFDR08-51, 55 OIP3 TEST (Down Converter)

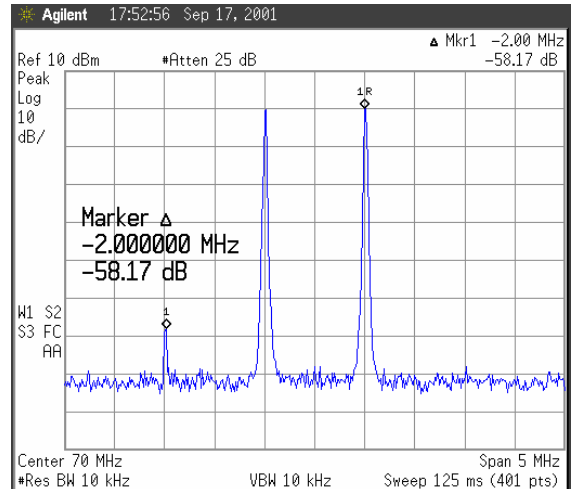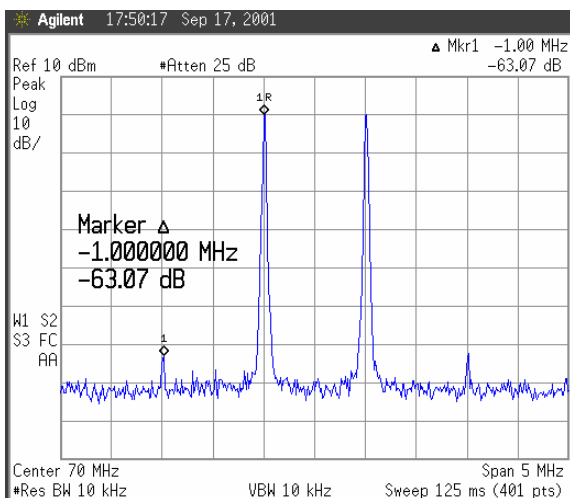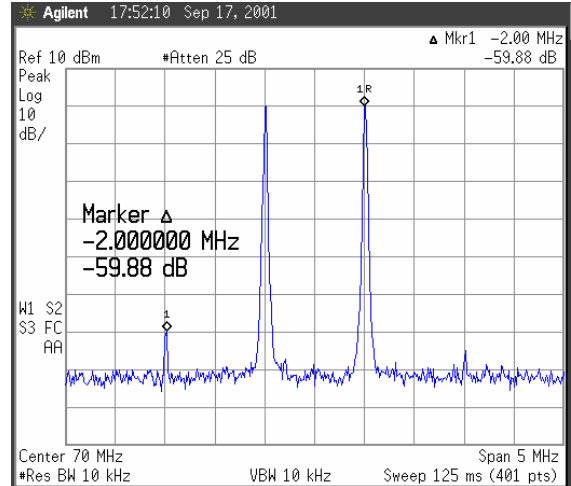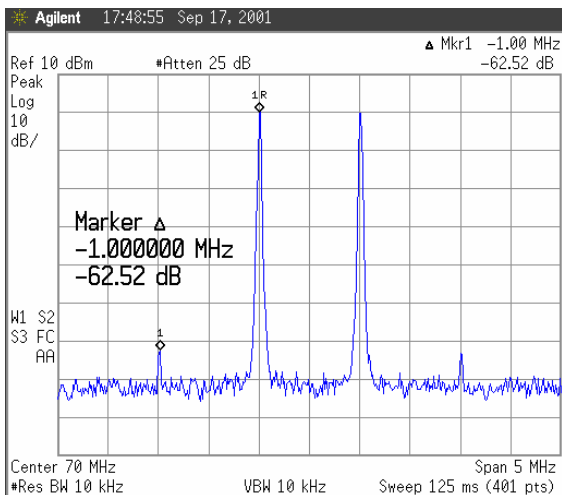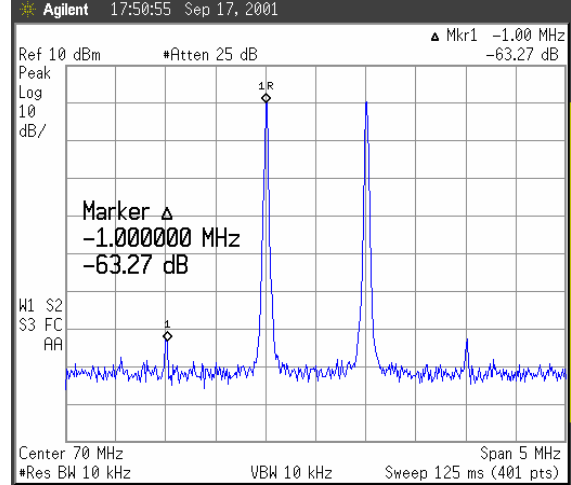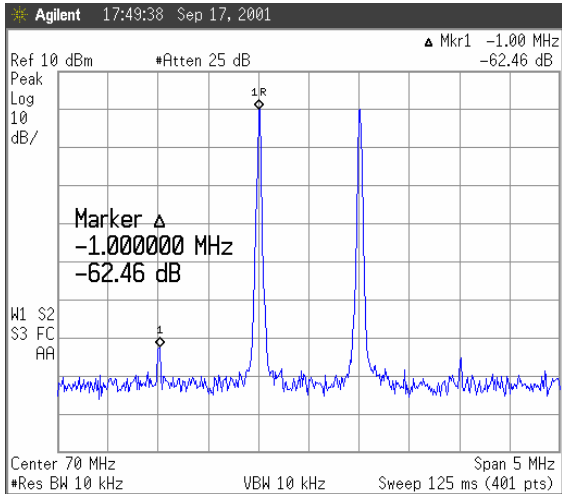


RFDR08-51, 55 CDMA POWER TEST (Down Converter)


Agilent 17:45:35 Sep 19, 2001

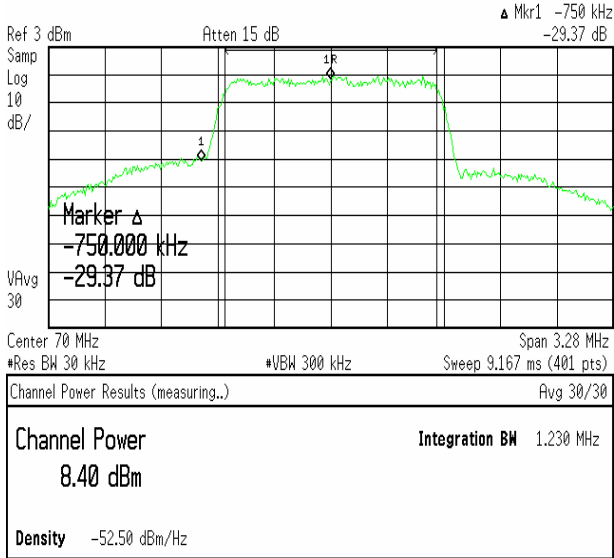


Agilent 06:15:41 Sep 20, 2001

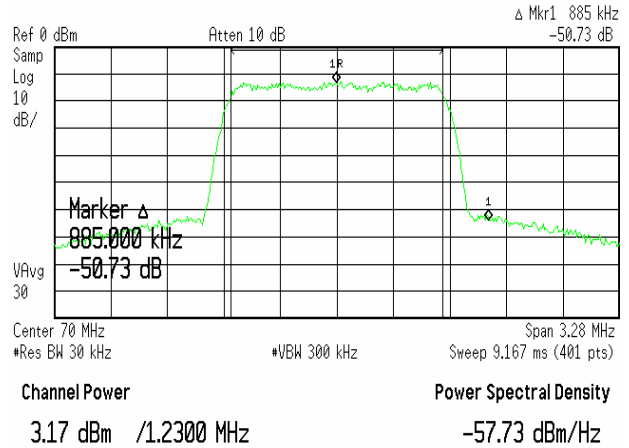


RFDR08-51, 55 Noise Figure (Down Converter)

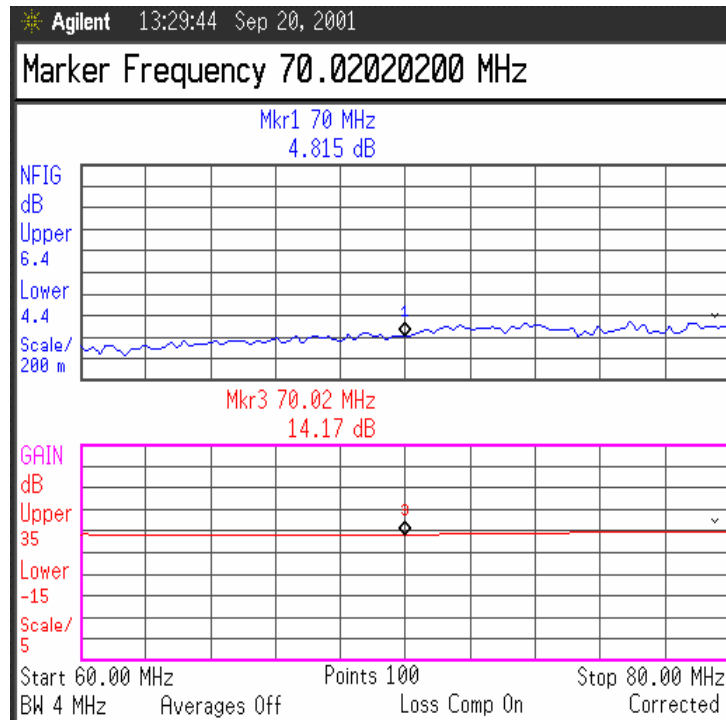

Pacakage Dimensions (Type: HY-5A)

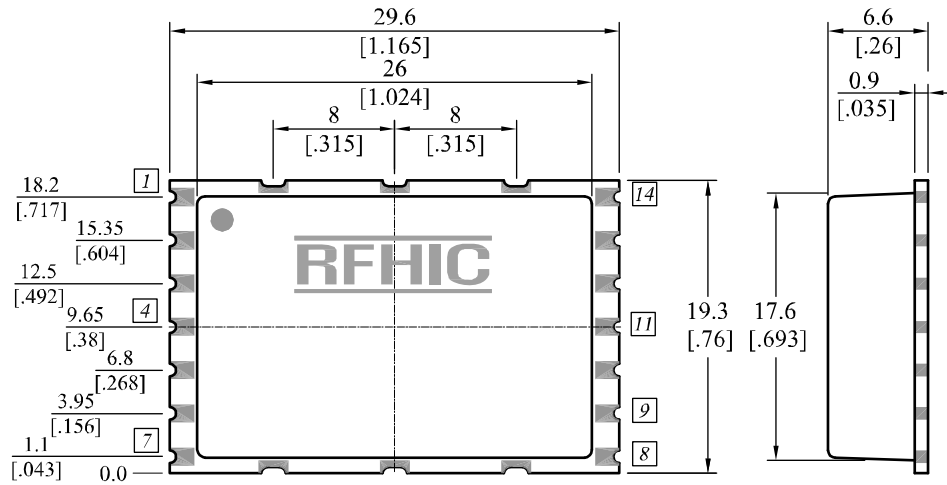

Recommended Pattern

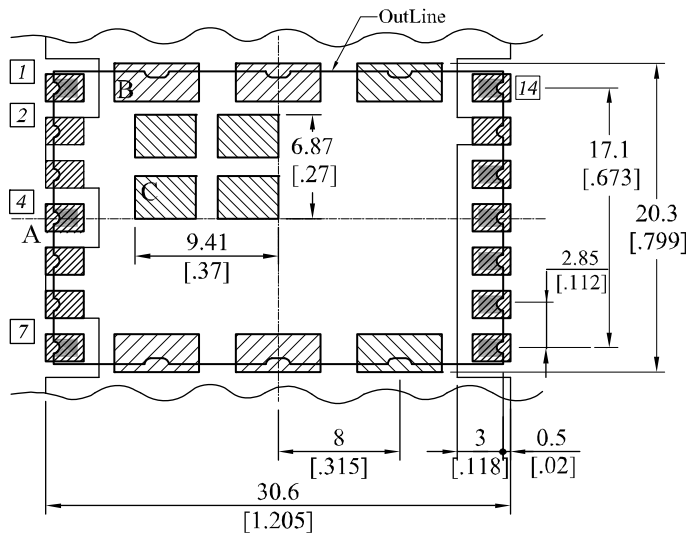

| Pin No. | Function | Pin No. | Function |
|---------|----------|---------|----------|
| 1 | Input | 14 | Output |
| 2 | Ground | 13 | Ground |
| 3 | Ground | 12 | Lo_Out |
| 4 | Vcc+5V | 11 | Fo/LD |
| 5 | Ground | 10 | LE |
| 6 | Ground | 9 | Data |
| 7 | Ref in | 8 | Clock |

| Pattern Size | | |
|--------------|-----------|-------------|
| WxL | mm | inch |
| A | 2.5 x 1.8 | .098 x .071 |
| B | 5.6 x 2.5 | .22 x .098 |
| C | 4 x 2.8 | .157 x .11 |

RFHIC Corporation (RFHIC) reserves the right to make changes to any products herein or to discontinue any product at any time without notice. RFHIC do not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. The product specifications herein expressed have been carefully checked and are assumed to be reliable. However, RFHIC disclaims liability for inaccuracies and strongly recommends buyers to verify that the information they are using is current before placing purchase orders. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such use. RFHIC's liability under or arising out of damages, claims of whatsoever kind and nature which RFHIC products could cause shall be limited in amount to the net purchase price of the products sold to buyer by RFHIC.