

Nell High Power Products

FRED

Ultrafast Soft Recovery Diode, 40 A

FEATURES

- Ultrafast recovery
- 175 °C operating junction temperature
- Designed and qualified for industrial level

BENEFITS



- Reduced RFI and EMI
- Higher frequency operation
- Reduced snubbing
- Reduced parts count

DESCRIPTION/APPLICATIONS

These diodes are optimized to reduce losses and EMI/RFI in high frequency power conditioning systems.

The softness of the recovery eliminates the need for a snubber in most applications. These devices are ideally suited for HF welding, power converters and other applications where switching losses are not significant portion of the total losses.

N-40EPU06

N-40APU06


TO-247AC modified

TO-247AB

PRODUCT SUMMARY

t_{rr}	40 ns
$I_{F(AV)}$	40 A
V_R	600 V

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Cathode to anode voltage	V_R		600	V
Continuous forward current	$I_{F(AV)}$	$T_C = 116^\circ\text{C}$	40	A
Single pulse forward current	I_{FSM}	$T_C = 25^\circ\text{C}$	360	
Operating junction and storage temperatures	T_j, T_{Stg}		- 55 to 175	°C

ELECTRICAL SPECIFICATIONS ($T_j = 25^\circ\text{C}$ unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Breakdown voltage, blocking voltage	V_{BR}, V_r	$I_R = 100\mu\text{A}$	600	-	-	V
Forward voltage	V_F	$I_F = 40\text{A}$	-	1.50	1.70	
		$I_F = 80\text{A}$	-	1.8	-	
		$I_F = 40\text{A}, T_j = 150^\circ\text{C}$	-	1.20	-	
Reverse leakage current	I_R	$V_R = V_R \text{ rated}$	-	-	25	μA
		$T_j = 150^\circ\text{C}, V_R = V_R \text{ rated}$	-	-	500	
Junction capacitance	C_T	$V_R = 200\text{V}$	-	36	-	pF

DYNAMIC RECOVERY CHARACTERISTICS ($T_J = 25^\circ\text{C}$ unless otherwise specified)							
PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNITS
Reverse recovery time	t_{rr}	$I_F = 0.5\text{A}, I_R = 1\text{A}, I_{RR} = 0.25\text{A}$ (RG#1 CKT)		-	36	45	ns
		$I_F = 1\text{A}, dI_F/dt = -100 \text{ A}/\mu\text{s}, V_R = 30\text{V}, T_J = 25^\circ\text{C}$		-	22	-	
		$T_J = 25^\circ\text{C}$		-	25	-	
		$T_J = 125^\circ\text{C}$		-	160	-	
Peak recovery current	I_{RRM}	$T_J = 25^\circ\text{C}$		-	3	-	A
		$T_J = 125^\circ\text{C}$		-	6	-	
		$V_R = 400\text{ V}$		-	35	-	
Reverse recovery charge	Q_{rr}	$T_J = 25^\circ\text{C}$		-	480	-	nC
		$T_J = 125^\circ\text{C}$		-	-	-	

THERMAL - MECHANICAL SPECIFICATIONS							
PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNITS
Thermal resistance, junction to case	R_{thJC}	Mounting surface, flat, smooth and greased		-	-	0.67	°C/W
Thermal resistance, case to heatsink	R_{thCS}			-	0.3	-	
Weight				-	5.5	-	g
				-	0.2	-	oz.
Mounting torque				0.6 (5)	-	1.2 (10)	N · m (lbf · in)
Marking device		Case style TO-247AC modified		40EPU06			
		Case style TO-247AC		40APU06			

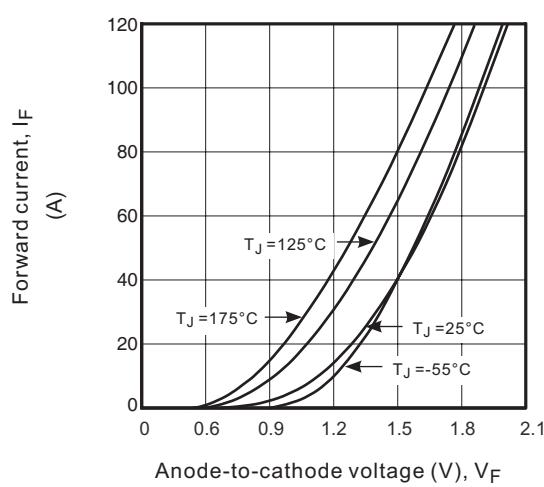
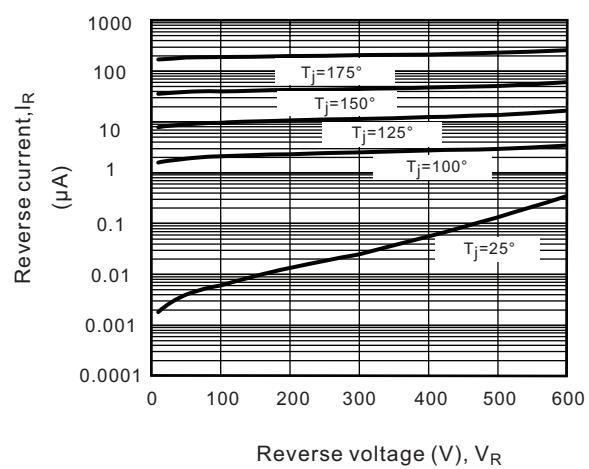
Fig.1 Forward current vs. forward voltage

Fig.2 Typical values of reverse current vs. reverse voltage


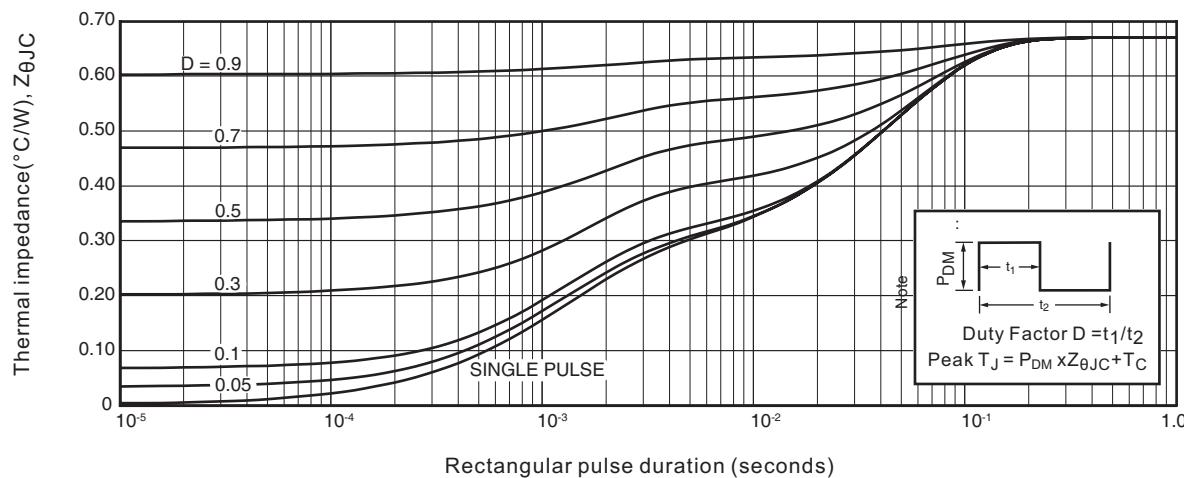
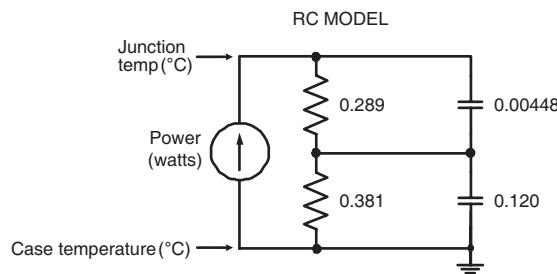
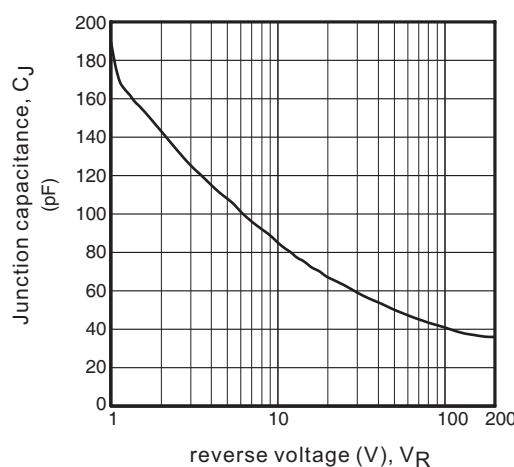
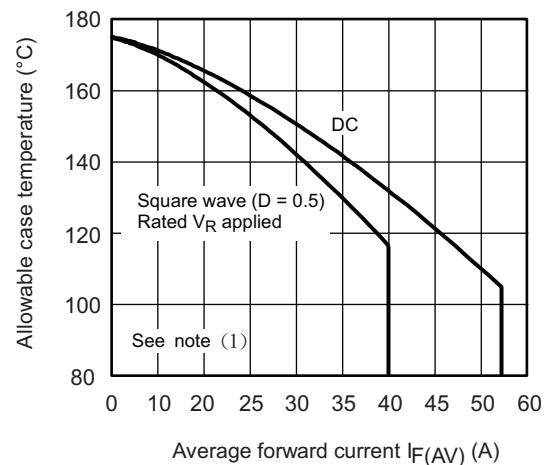
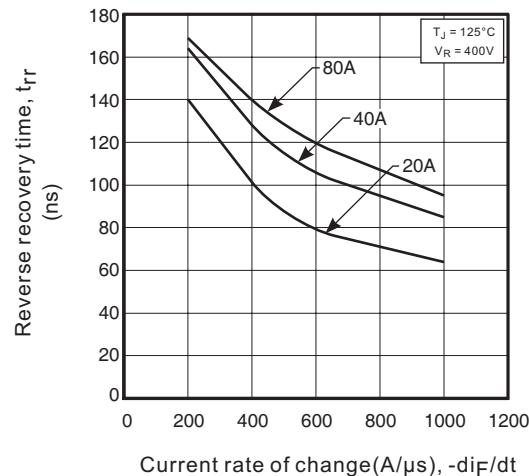
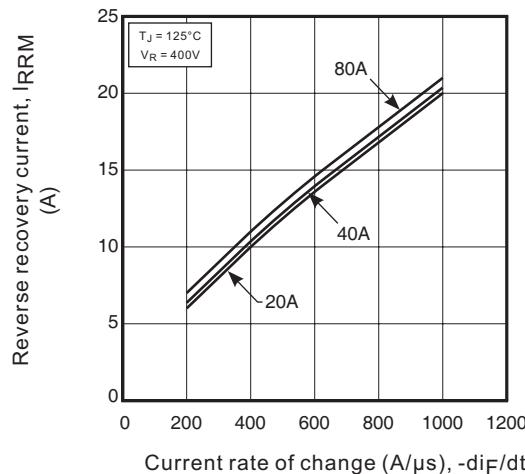
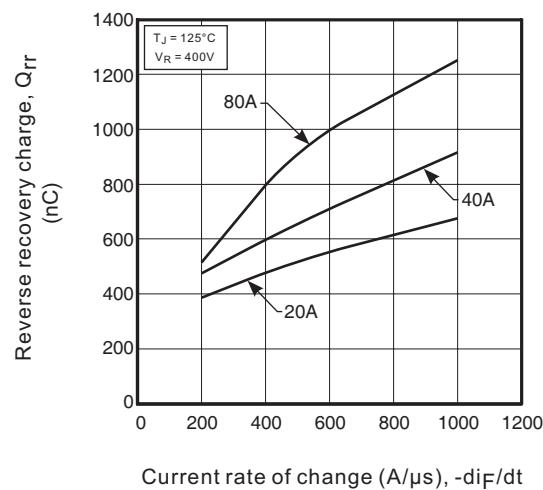
Fig.3a Maximum effective transient thermal impedance, junction-to-case vs. pulse duration

Fig.3b transient thermal impedance model

Fig.4 Junction capacitance vs. reverse voltage

Fig.5 Max. allowable case temperature Vs. average forward current


Fig.6 Reverse recovery time vs. current rate of change

Fig.7. Reverse recovery current vs. current rate of change

Fig.8 Reverse recovery charge vs. current rate of change


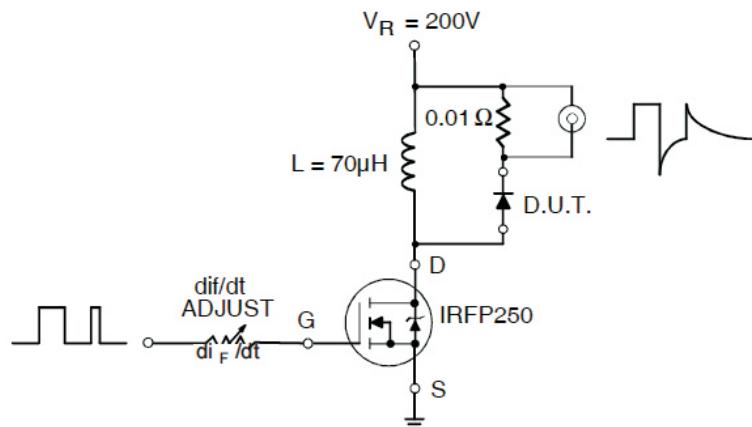
Ordering Information Table

Device code


N	-	40	E	P	U	06
(1)	(2)	(3)	(4)	(5)	(6)	

- 1 - Nell
- 2 - Current rating (40 = 40A)
- 3 - Single Diode
- 4 - TO-247AC (Modified)
- 5 - Ultrafast Recovery
- 6 - Voltage Rating (06 = 600 V)

E = 2 pins
A = 3 pins


Fig.9 Reverse recovery parameter test circuit
Reverse Recovery Circuit


- (3) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;
 $P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\% \text{ rated } V_R$

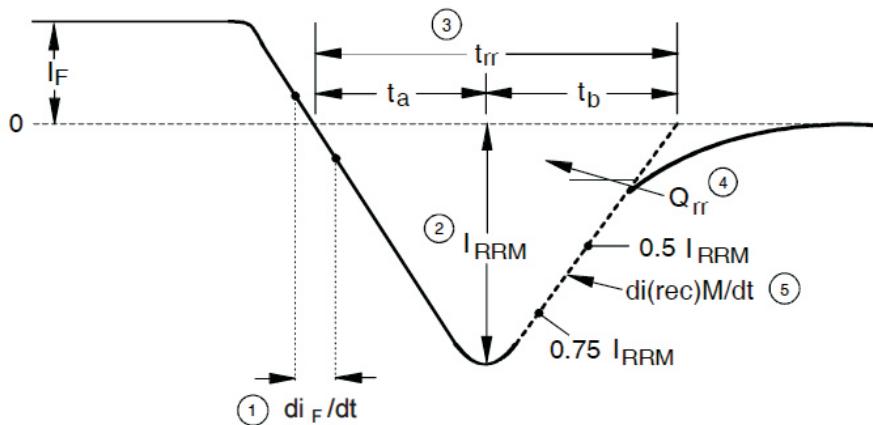Fig.10 Reverse recovery waveform and definitions


- | | |
|--|--|
| 1. di/dt - Rate of change of current through zero crossing | 4. Q_{rr} - Area under curve defined by t_{rr} and I_{RRM} |
| 2. I_{RRM} - Peak reverse recovery current | $Q_{rr} = \frac{t_{rr} \times I_{RRM}}{2}$ |
| 3. t_{rr} - Reverse recovery time measured from zero crossing point of negative going I_F to point where a line passing through $0.75 I_{RRM}$ and $0.50 I_{RRM}$ extrapolated to zero current | 5. $di (rec) M / dt$ - Peak rate of change of current during t_b portion of t_{rr} |

Outline Table

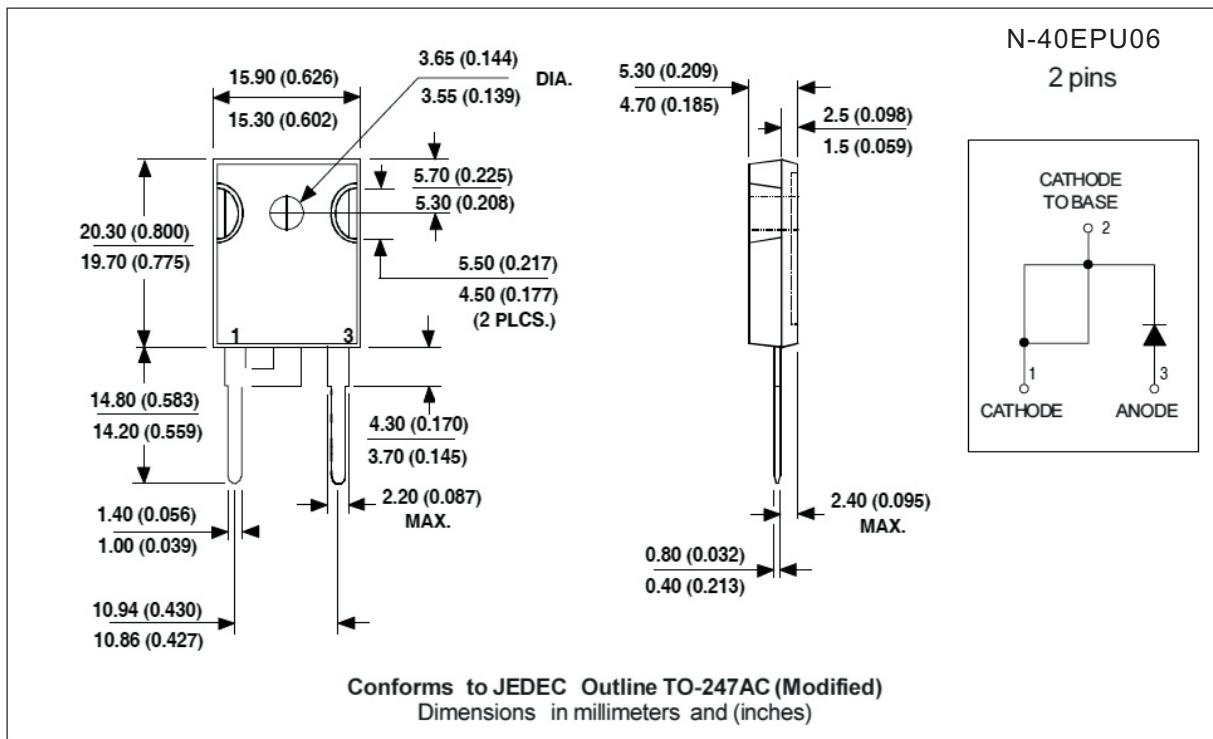

Outline Table

