BGV503

Negative Voltage Generator for biasing GaAs FETs and Power Amplifiers

Wireless Silicon Discretes



Never stop thinking.

Edition 2001-11-09 2002-11-11

Published by Infineon Technologies AG, St.-Martin-Strasse 53, D-81541 München © Infineon Technologies AG 2001

All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

BGV503 Data sheet Revision History:		2002-11-11		
Previous	Version:	2001-05-16		
Page	Subjects (major changes since last revision)			
*	Prelimina	removed, Figure 3 (Application) updated		

For questions on technology, delivery and prices please contact the Infineon Technologies Offices in Germany or the Infineon Technologies Companies and Representatives worldwide: see our webpage at http://www.infineon.com

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:

mcdocu.comments@infineon.com





Negative Voltage Generator for biasing GaAs FETs and Power Amplifiers

Features

- one-stage charge-pump with internal drain current regulator for biasing GaAs-FETs
- Operating Voltage Range: + 2.7V ... 5.0V
- Typical Output Voltage: 2.5V
- Output Current: 3mA (typ)
- p-p Output Voltage Ripple: 25mV ... 40mV
 @ C_{OUT} = 1µF; I_{OUT} = 3mA
- Integrated Oscillator f_{OSZ} : 230kHz
- Standby Supply Current: < 5µA
- Logic-Level Shutdown Mode



ESD: Electrostatic discharge sensitive device, observe handling precaution!

Туре	Package	Marking
BGV503	P-TSSOP-10	BGV503S





Electrical Characteristics at $T_A=25$ °C, unless otherwise specified

Characteristics	Limit Values		Unit	Test Conditions	
	min.	typ.	max.		
Input Voltage Range	2.7		5.0	V	
Ground (V _{SS})		0		V	
Output Voltage		- 2.1	- 1.4	V	$V_{\rm CC}$ = 2.7 V; $I_{\rm OUT}$ = 3 mA
		- 2.5	- 1.7	V	$V_{\rm CC}$ = 3.0 V; $I_{\rm OUT}$ = 3 mA
		- 4.6	- 3.9	V	$V_{\rm CC}$ = 5.0 V; $I_{\rm OUT}$ = 3 mA
Power Efficiency		76		%	$V_{\rm CC}$ = 3.0 V; $R_{\rm load}$ = 1 k Ω
Output Voltage Ripple ¹⁾		20		mV	$V_{\rm CC} = 3.0 \text{ V}; I_{\rm OUT} = 0 \text{ mA}$
		100		mV	$V_{\rm CC}$ = 3.0 V; $I_{\rm OUT}$ = 3 mA
No-Load Supply Current T _A =-40°C		0.65	2.0	mA	$V_{\rm CC} = 3.0 \text{ V}$
Voltage Conversion Efficiency		99.6		%	$I_{\rm OUT} = 0 \rm mA$
Shutdown/Enable Input Bias Current			1	μA	
Shutdown Input Supply Current			5	μA	
Turn On Time		51		μs	
Temperature Range	- 40		105	°C	

¹⁾ $C_{OUT} = 100 \text{ nF}$



Confidential

Pin Descripion

Pin No.	Pin Name	Description		
1	R _{REF}	Sense resistor for the regulator		
2	V_{REF}	Reference voltage of the regulator		
3	NV	Negative output-voltage (unregulated)		
4	$V_{\rm SS}$	Ground connection		
5	V _{CC}	Positive supply voltage		
6	V_{DISQ}	Enable (TTL compatible)		
7	V _{CON}	Reference voltage of the regulator		
8	V_{NEG}	Regulated output voltage for biasing GaAs FETs		
9	C1D	Charge pump capacitor		
10	C2P	Charge pump capacitor		

Pin Configuration




Figure 1 BGV503 in Package P-TSSOP-10





Functional Block Diagram

The BGV503 is a charge pump based negative voltage generator. The supply voltage ($V_{\rm CC}$) is inverted and applied to the output NV

The BGV503 consists of an internal oscillator, a switching control circuit, the internal charge pump switches and a drain current regulator.

The switching frequency (clk) of the charge-pump is determined by the integrated oscillator and is between 100 kHz and 400 kHz. It is possible to stop the operating of the BGV503 by connecting V_{DISQ} to a voltage lower than 1 V (shutdown mode). The switching control circuit ensures that the internal MOS-switches of the charge-pump operate at the correct time. The regulator consists of two transistors and two internal resistors. It can be used to control the biasing of Power amplifiers or GaAs-FET amplifiers (see Figure 3).

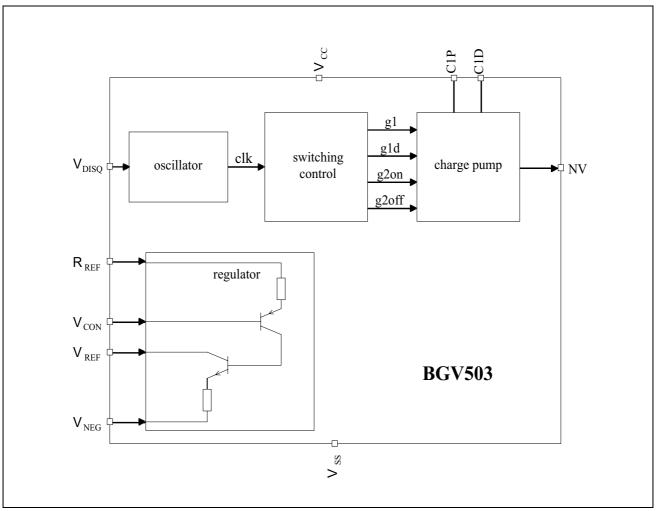






Confidential

Typical Applications

For all applications use capacitors with low effective series resistance (ESR) to maintain a low dropout voltage with high stability, good conversion efficiency and a low p-p voltage ripple.

An additional capacitor in the supply line (between V_{CC} and V_{SS}) is useful to reduce the AC input impedance. As a consequence, this minimize the spurious signals (EMI) on the supply lines, that came from the current peaks when the BGV503 is switching. The value of this capacitor depends on the circuit configuration and on customer requirements concerning EMI; 1 μ F is regarded as sufficient.

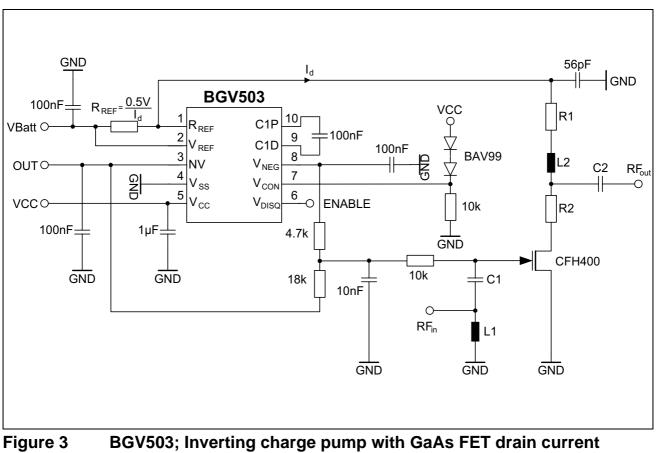


regulation loop

Note: For the above application see Application note No. 80




Preliminary Typical Operating Characteristics

Supply Current vs. Temperature

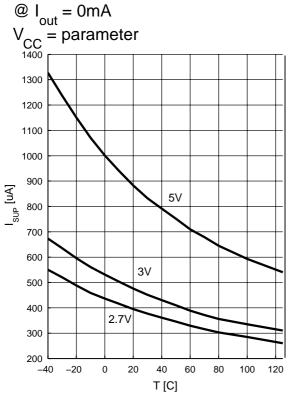


Oscillator Frequency vs. Temperature

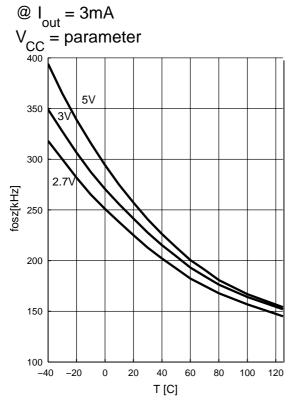


Output Voltage vs. Load Current

 V_{CC} = parameter

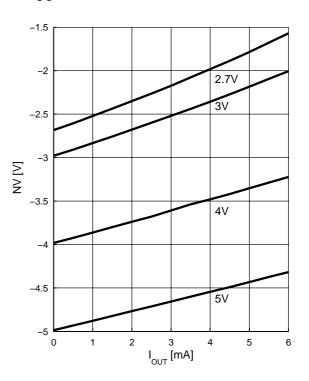


Power Efficiency vs. Load Current

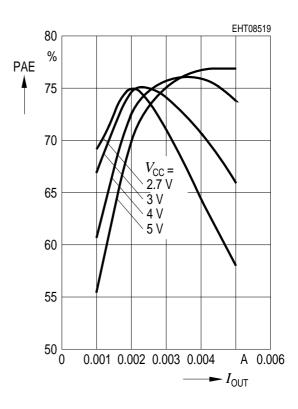




Confidential


Ripple vs. Output-Capacity (peak to peak) @ I_{OUT} = 3 mA

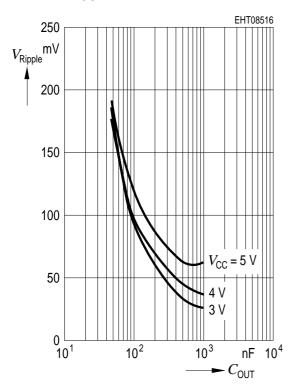


Output Voltage vs. Supply Voltage @ I_{out} = 3mA

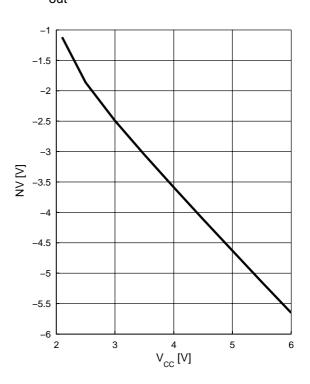

Output Voltage, AC-coupled, $V_{CC} = 3 \text{ V}, I_{OUT} = 0 \text{ mA}, C_{OUT} = 100 \text{ nF}$ Output Voltage, AC-coupled, V_{CC} = 3 V, I_{OUT} = 3 mA, C_{OUT} = 100 nF










Package Outline

P-TSSOP-10

(Plastic Thin Shrink Small Outline Package)

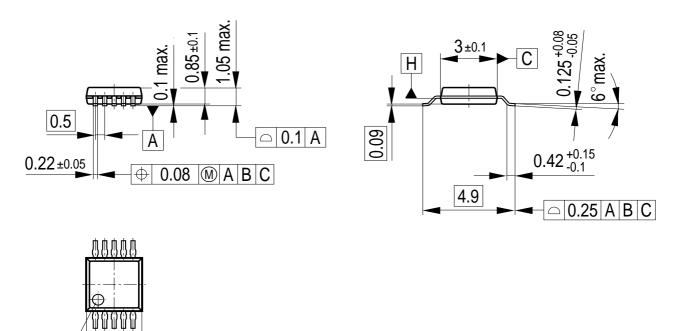

Index Marking

3±0.1

В