


SB020 THRU SB040

MINIATURE SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 40 Volts Forward Current - 0.6 Ampere

Case Style MPG06

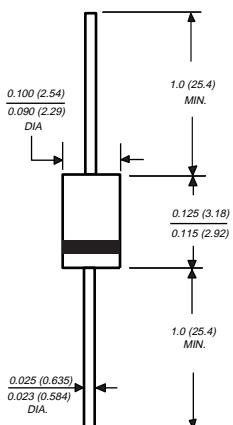

Dimensions in inches
and
(millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability, low forward voltage drop
- ◆ High surge capability
- ◆ Guardring for overvoltage protection
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3 kg) tension

MECHANICAL DATA

Case: Molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.0064 ounce, 0.181 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	SB020	SB030	SB040	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	Volts
Maximum RMS voltage	V _{RMS}	14	21	28	Volts
Maximum DC blocking voltage	V _D C	20	30	40	Volts
Maximum average forward rectified current at 0.375" (9.5mm) lead length T _L =60°C	I _(AV)		0.6		Amp
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at T _L =70°C	I _{FSM}		20.0		Amps
Maximum instantaneous forward voltage at 0.6A (NOTE 1)	V _F		0.55		Volts
Maximum instantaneous reverse current at rated DC blocking voltage T _A =25°C (NOTE 1) T _A =100°C	I _R		0.5 10.0		mA
Typical thermal resistance (NOTE 2)	R _{θJA} R _{θJL}		60.0 20.0		°C/W
Operating junction temperature range	T _J		-55 to +125		°C
Storage temperature range	T _{STG}		-55 to +150		°C

NOTES:

(1) Pulse test: 300μs pulse width, 1% duty cycle

(2) Thermal resistance from junction to ambient vertical P.C.B. mounted, 0.5" 1.27mm lead length with 1.5 x 1.5" (38 x 38mm) copper pad

RATINGS AND CHARACTERISTIC CURVES SB020 THRU SB040

FIG. 1 - FORWARD CURRENT DERATING CURVE

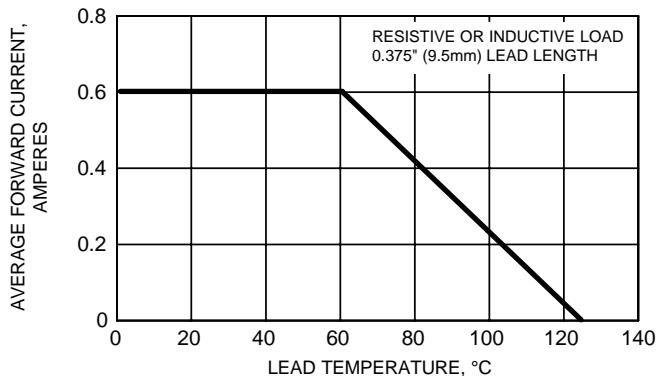


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

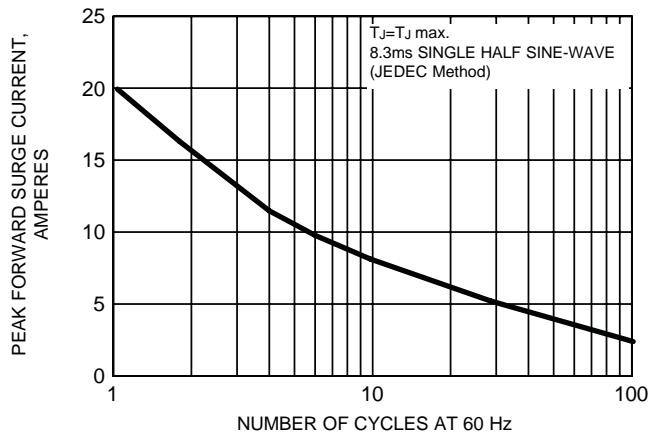


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

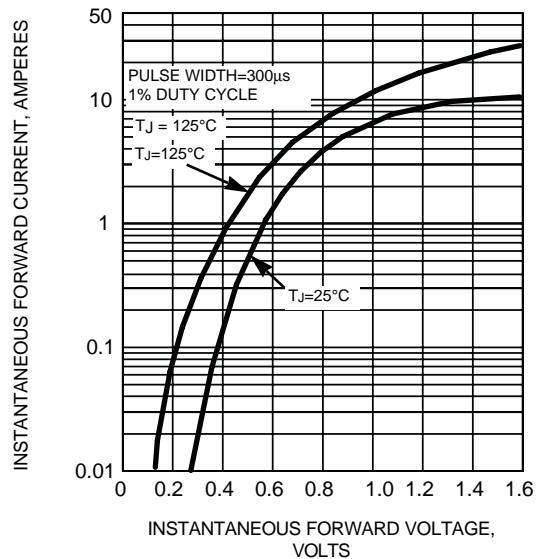


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

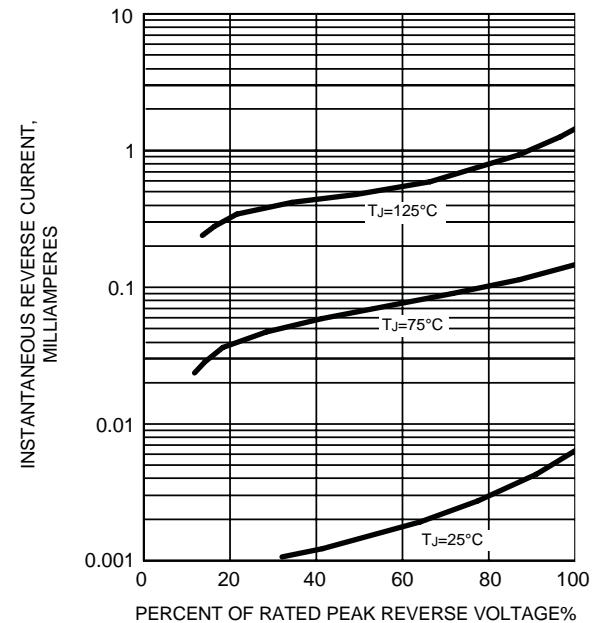


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

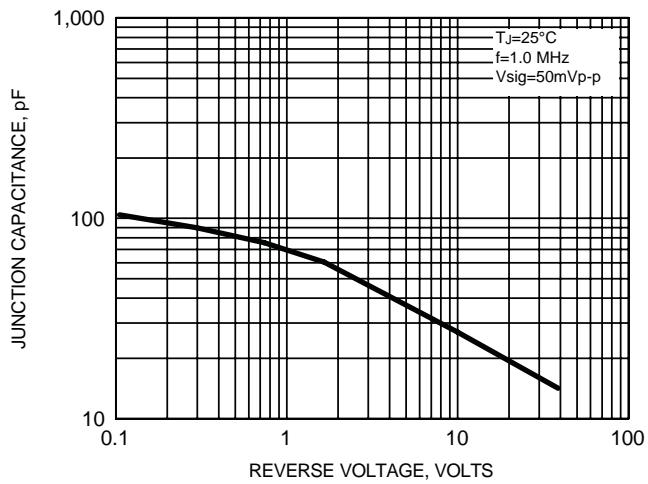


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

