

REMOTE-CONTROL INTERFACE IC


■ GENERAL DESCRIPTION

The NJM2129 is a remote-control interface for television, VCR, receiver, and others.


The signal flow of IN1 to OUT1 and IN2 to OUT2 is a first priority. When no signal is input from the IN2, a signal which is input from the IN1 is output to the OUT2 through the OUT1. Also when no signal is input from IN1 and IN2, a signal which is input from the OUT1 is output to the OUT2.

An internal regulator can operate a LED.

■ PACKAGE OUTLINE



NJM2129D



NJM2129M

■ FEATURES


[INTERFACE BLOCK]

- IN4 switches One-Way or Two-Way communication

[REGULATOR BLOCK]

- Internal Current Limit Circuit
- Internal Output Short Protection
- ON/OFF Control
- Bipolar Technology
- Package Outline DIP14, DMP14

■ BLOCK DIAGRAM

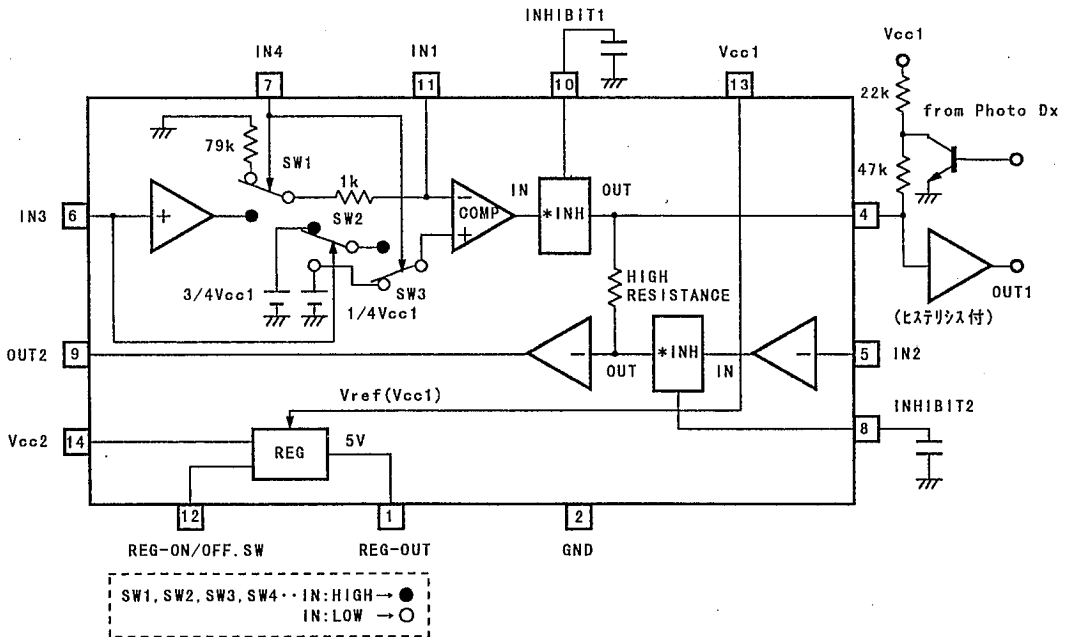

*The output of INH becomes high impedance when its input is keeping over about 40 msec.

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{CC1,2}	15	V
Input Voltage	V _{IN}	15	V
Power Dissipation	P _D	DIP8 700 DMP8 300	mW
Operating Temperature Range	T _{OPR}	-20 ~ +75	°C
Storage Temperature Range	T _{STG}	-40 ~ +125	°C

■ ELECTRICAL CHARACTERISTICS (V_{CC1}=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION									MIN.	TYP.	MAX.	UNIT
		INPUT CONDITION					CIRCUIT							
【INTERFACE】		OUT1	IN1	IN2	IN3	IN4	SW1	SW2	SW3					
Operating Supply Voltage ₁	V _{CC1}	—	—	—	—	—				4.75	5.0	5.25	V	
Operating Current ₁	I _{CC1}	—	L	L	L	L				—	2	4	mA	
Operating Current ₂	I _{CC2}	—	—	H	H	H	3	2	3	—	4.5	7	mA	
IN2/3/4-V _{th}	IN2/3/4-V _{th}	—	—	—	—	—				2.0	2.5	3.0	V	
IN1-V _{th} (note 1)	IN1-V _{th}	—	—	L	H					1.0	1.3	2.0	V	
		—	—	H/L	L					1.0	1.3	2.0	V	
		—	—	H	H					3.0	3.6	4.0	V	
OUT1 (Low)	OUT1-L		H	—	—	—	2			0	—	1.5	V	
OUT1 (High)	OUT1-H		*L	—	—	—	1			3.5	—	5.0	V	
OUT1 (Hi-Imp)	OUT1-Hi-Imp		L	—	—	—	1			0	—	1.5	V	
			L	—	—	—	2			3.5	—	5.0	V	
OUT2 (Low)	OUT2-L	L	H	*L	—	—	2	1		0	—	1.5	V	
		H	*L	*L	—	—	1	1						
		L/H	L	*L	—	—	1/2	1						
		H	*L	L	—	—	1	1						
			L	L	—	—	2	1						
OUT2 (Hsgt)	OUT2-H	L	H	H	—	—	2	2		3.5	—	5.0	V	
		H	*L	H	—	—	1	2						
		L/H	L	H	—	—	1/2	2						
		L	H	L	—	—	2	2						
			L	L	—	—	1	2						

(note 1): The V_{th} of IN1 is changed by condition of IN3 and IN4.

*: For INHIBIT.

6

NJM2129

■ ELECTRICAL CHARACTERISTICS (Vcc1=5V, Ta=25°C)







PARAMETER	SYMBOL	TEST CONDITION									MIN.	TYP.	MAX.	UNIT
【INTERFACE】		INPUT CONDITION					CIRCUIT							
		OUT1	IN1	IN2	IN3	IN4	SW1	SW2	SW3					
IN1 Input Impedance	IN1-Rin	—		—	—	—	1				47	80	120	kΩ
IN1-OUT (Low)	IN1-Lout			—	L	H	2				2	2.5	3	V
				—	L	H	3				0	—	1.0	V
IN1-OUT (High)	IN1-Hout	—		—	H	H	2				3.5	—	5.0	V
		—		—	H	H	3				2	2.5	3	V
IN1-OPEN	IN1-Open	—		—	H	H	1				4.0	—	5.0	V
INHIBIT1 Time	INH1-time	—	*L	—	—	L					20	40	80	ms
INHIBIT2 Time	INH2-time	—	—	*L	—	—		1			20	40	80	ms
Slew Switch1 (IN1→OUT2)		Vcc1:OFF, IN1=3.5V							3		3.0	—	—	V
【POWER SUPPLY】 (note 3)														
Operating Power Supply2	Vcc2										5.75	5.9	12 (note4)	V
Operating Current2	Icc2	Io=0mA									—	2	3	mA
		Io=50mA									—	20	30	mA
Output Voltage	Vout	Vcc2=5.9V, Io=60mA									4.5	5.0	5.3	V
Line Regulation	ΔVo-Vcc2	Vcc2=5.75V~12V, Io=50mA									—	—	300	mA
Load Regulation	ΔVo-Io	Vcc2=5.9V, Io=0~50mA									—	—	300	mA
REG-SW (ON)	Reg-ON										3.0	—	5.0	V
REG-SW (OFF)	Reg-OFF										0	—	2.0	V

(note 3) The Vref in Power Supply block is the Vcc1, so that its specification is guaranteed at Vcc1=5V.

(note 4) The Supply voltage of Vcc2 must be chose less then power dissipation.

6

TYPICAL CHARACTERISTICS

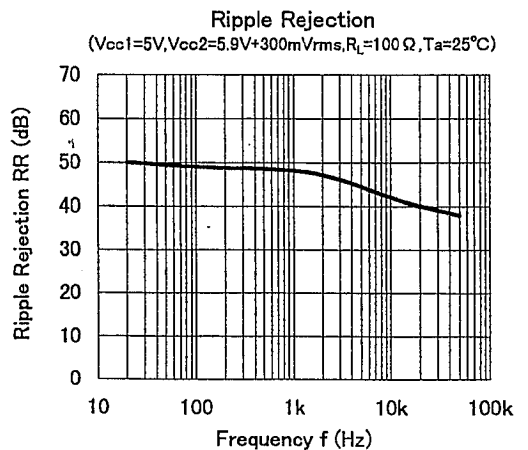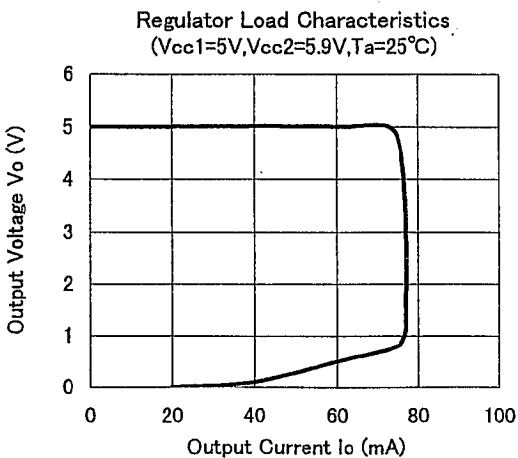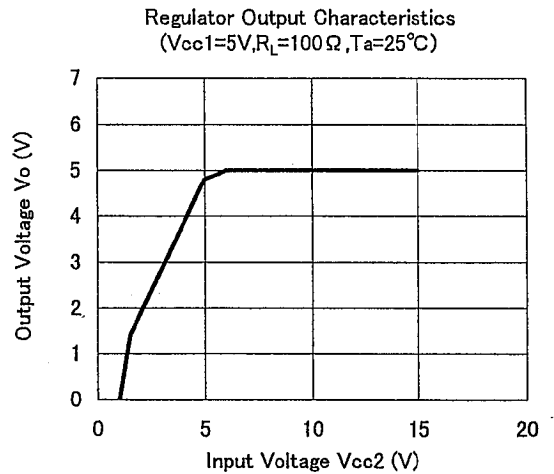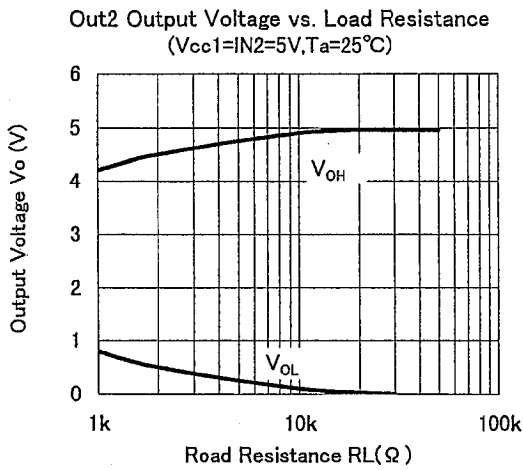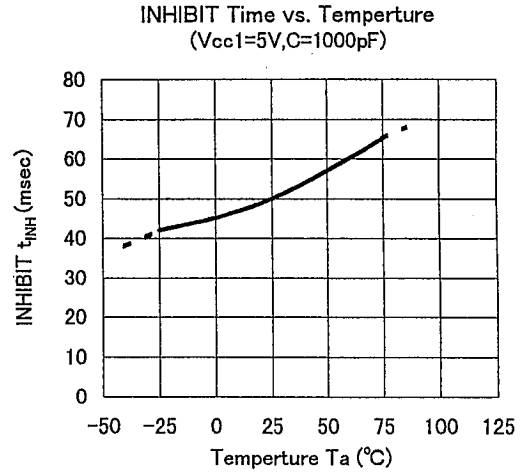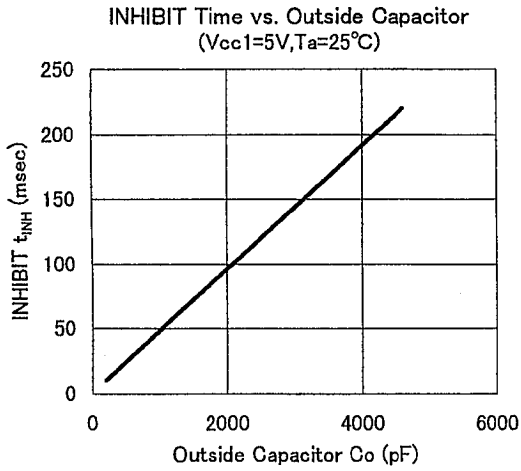

6

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.