



# SP432

## Low Voltage Adjustable Precision Shunt Regulators

### DESCRIPTION

The SP432 is low-voltage three-terminal adjustable voltage references, with specified thermal stability over applicable industrial and commercial temperature ranges. Output voltage can be set to any value between V<sub>REF</sub> (1.24V) and 20V with two external resistors. These devices have a typical output impedance of 0.25Ω. Active output circuitry provides a very sharp turn-on characteristic, making the SP432 excellent replacements for low-voltage Zener diodes in many applications, including onboard regulation and adjustable power supplies.

### APPLICATIONS


- Battery Power Equipment
- Linear Regulators
- Switch Power Supply
- Cellular Phone
- Digital Cameras
- Computer Disk Drivers
- Instrumentation

### FEATURES


- ◆ Low-Voltage Operation --- Down to 1.24 V
- ◆ Adjustable Output Voltage, V<sub>O</sub> = V<sub>ref</sub> to 20 V
- ◆ Low Operational Cathode Current --- 80uA ( Typ )
- ◆ 0.25Ω Typical Output Impedance

### PIN CONFIGURATION


SOT-23

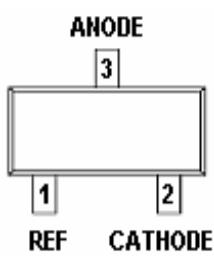


TO-92

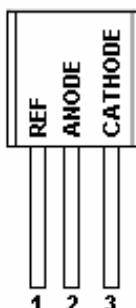

SOT-23-5L

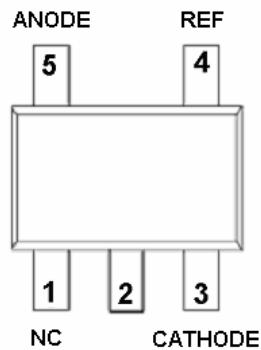


SOT-353 ( SC-70 )

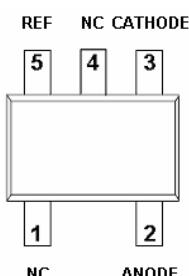


### PART MARKING

SOT-23




Y : Year Code  
W : Week Code

TO-92

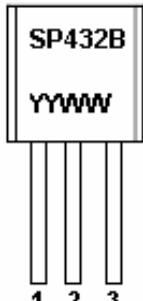


Y : Year Code  
W : Week Code

SOT-23-5L

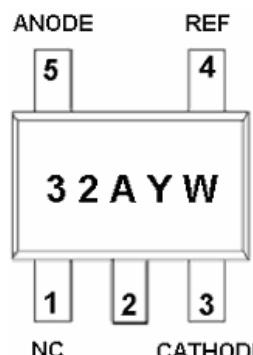

SOT-353 ( SC-70 )




Y : Year Code  
W : Week Code



# SP432

## Low Voltage Adjustable Precision Shunt Regulators

### TYPICAL APPLICATION CIRCUIT

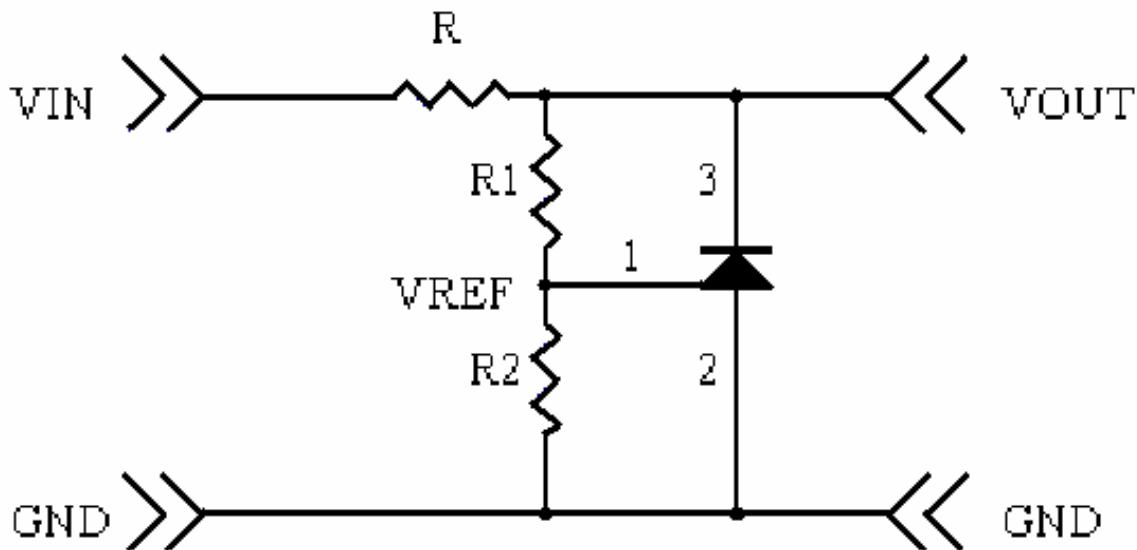

### PIN DESCRIPTION

Pin	Symbol	Description
1	R	REF
2	C	CATHODE
3	A	ANODE

### ORDERING INFORMATION

Part Number	Voltage Tolerance	Package	Part Marking
SP432AS23RG	0.5%	SOT-23	32AYW
SP432BS23RG	1.0%	SOT-23	32BYW
SP432AS25RG	0.5%	SOT-23-5L	32AYW
SP432BS25RG	1.0%	SOT-23-5L	32BYW
SP432BT92AG	1.0%	TO-92	SP432B
SP432AS35RG	0.5%	SOT-353	32AYW
SP432BS35RG	1.0%	SOT-353	32BYW

※ Week Code : A ~ Z ( 1 ~ 26 ) ; a ~ z ( 27 ~ 52 )

※ SP432AS23RG : Tape Reel ; Pb – Free

※ SP432BS23RG : Tape Reel ; Pb – Free

※ SP432AS25RG : Tape Reel ; Pb – Free

※ SP432BS25RG : Tape Reel ; Pb – Free

※ SP432BT92AG : Tape Ammo ; Pb-Free

※ SP432AS35RG : Tape Reel ; Pb – Free


※ SP432BS35RG : Tape Reel ; Pb – Free



# SP432

## Low Voltage Adjustable Precision Shunt Regulators

### BLOCK DIAGRAM

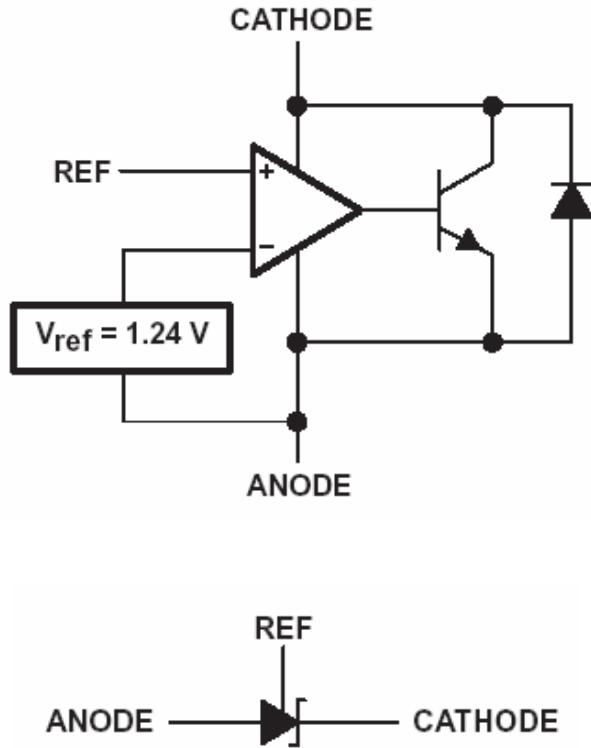

### ABSOULTE MAXIMUM RATINGS

(TA=25°C Unless otherwise specified)

Parameter	Symbol	Value	Unit
Cathode Voltage	VZ	20	V
Continuous Cathode Current	Iz	100	mA
Reference Current	IREF	3	mA
Operation Junction Temperature Range	TJ	-40 ~ +150	°C
Storage Temperature Range	TSTG	-65 ~ +150	°C
Lead Temperature Range (Soldering 10sec.)	TSOL	260	°C
Thermal Resistance	θJA	TO-92 SOT-23 SOT-23-5L SOT-353	140 206 206 252 °C/W

The IC has a protection circuit against static electricity. Do not apply high static electricity or high voltage that exceeds the performance of the protection circuit to the IC.

**SP432****Low Voltage Adjustable Precision Shunt Regulators****ELECTRICAL CHARACTERISTICS**

(TA=25°C , Unless otherwise specified)

SP432AS23RG & SP432AS25RG & SP432AS35RG							
Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Reference Voltage	V <sub>REF</sub>	V <sub>Z</sub> = V <sub>REF</sub>	TA=25°C	1.234	1.24	1.246	V
		I <sub>Z</sub> = 10mA	TA=-40°C ~ +80°C	1.222		1.258	
V <sub>REF</sub> Temp Deviation	V <sub>DEV</sub>	TA=-40°C ~ +80°C V <sub>Z</sub> = V <sub>REF</sub> , I <sub>Z</sub> = 10mA			10	25	mV
Ratio of change in V <sub>REF</sub> to change in Cathode voltage	ΔV <sub>REF</sub> / ΔV <sub>Z</sub>	I <sub>Z</sub> = 10mA ΔV <sub>Z</sub> = 16V ~ V <sub>REF</sub>			-1.0	-2.7	mV / V
Reference Input Current	I <sub>REF</sub>	R <sub>1</sub> =10KΩ, R <sub>2</sub> = ∞, I <sub>Z</sub> = 10mA			0.15	0.5	uA
I <sub>REF</sub> Temp Deviation	I <sub>REF(DEV)</sub>	TA=-40°C ~ +80°C R <sub>1</sub> =10KΩ, R <sub>2</sub> = ∞, I <sub>Z</sub> = 10mA			0.1	0.4	uA
Off state Cathode Current	I <sub>Z(OFF)</sub>	V <sub>REF</sub> = 0V	V <sub>Z</sub> = 6V		0.5	1.0	uA
			V <sub>Z</sub> = 12V				
Dynamic output impedance	R <sub>Z</sub>	f < 1KHZ, V <sub>Z</sub> = V <sub>REF</sub> I <sub>Z</sub> = 1mA ~ 100mA			0.25	0.4	Ω
Minimum Operation Current	I <sub>Z(MIN)</sub>	V <sub>Z</sub> = V <sub>REF</sub>			30	80	uA

SP432BS23RG & SP432BS25RG & SP432BT92AG & SP432BS35RG							
Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Reference Voltage	V <sub>REF</sub>	V <sub>Z</sub> = V <sub>REF</sub>	TA=25°C	1.228	1.24	1.252	V
		I <sub>Z</sub> = 10mA	TA=-40°C ~ +80°C	1.215		1.265	
V <sub>REF</sub> Temp Deviation	V <sub>DEV</sub>	TA=-40°C ~ +80°C V <sub>Z</sub> = V <sub>REF</sub> , I <sub>Z</sub> = 10mA			10	25	mV
Ratio of change in V <sub>REF</sub> to change in Cathode voltage	ΔV <sub>REF</sub> / ΔV <sub>Z</sub>	I <sub>Z</sub> = 10mA ΔV <sub>Z</sub> = 16V ~ V <sub>REF</sub>			-1.0	-2.7	mV / V
Reference Input Current	I <sub>REF</sub>	R <sub>1</sub> =10KΩ, R <sub>2</sub> = ∞, I <sub>Z</sub> = 10mA			0.15	0.5	uA
I <sub>REF</sub> Temp Deviation	I <sub>REF(DEV)</sub>	TA=-40°C ~ +80°C R <sub>1</sub> =10KΩ, R <sub>2</sub> = ∞, I <sub>Z</sub> = 10mA			0.1	0.4	uA
Off state Cathode Current	I <sub>Z(OFF)</sub>	V <sub>REF</sub> = 0V	V <sub>Z</sub> = 6V		0.5	1.0	uA
			V <sub>Z</sub> = 12V				
Dynamic output impedance	R <sub>Z</sub>	f < 1KHZ, V <sub>Z</sub> = V <sub>REF</sub> I <sub>Z</sub> = 1mA ~ 100mA			0.25	0.4	Ω
Minimum Operation Current	I <sub>Z(MIN)</sub>	V <sub>Z</sub> = V <sub>REF</sub>			30	80	uA



# SP432

## Low Voltage Adjustable Precision Shunt Regulators

### APPLICATION CIRCUIT

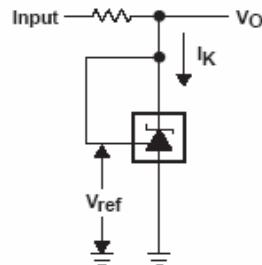


Figure 1. Test Circuit for  $V_{KA} = V_{ref}$ ,  
 $V_O = V_{KA} = V_{ref}$

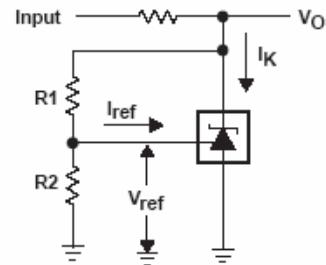


Figure 2. Test Circuit for  $V_{KA} > V_{ref}$ ,  
 $V_O = V_{KA} = V_{ref} \times (1 + R1/R2) + I_{ref} \times R1$

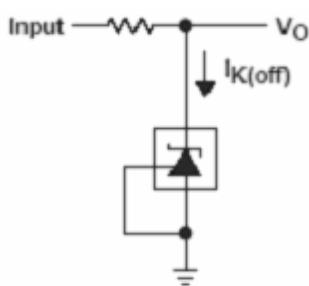


Figure 3. Test Circuit for  $I_{K(off)}$

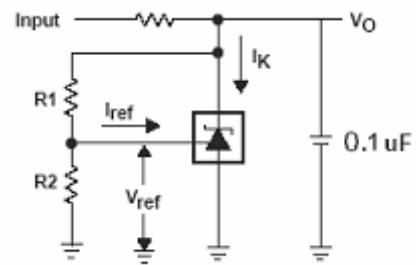


Figure 4. Test Circuit for  $V_{KA} > V_{ref}$ ,  
 $V_O = V_{KA} = V_{ref} \times (1 + R1/R2) + I_{ref} \times R1$

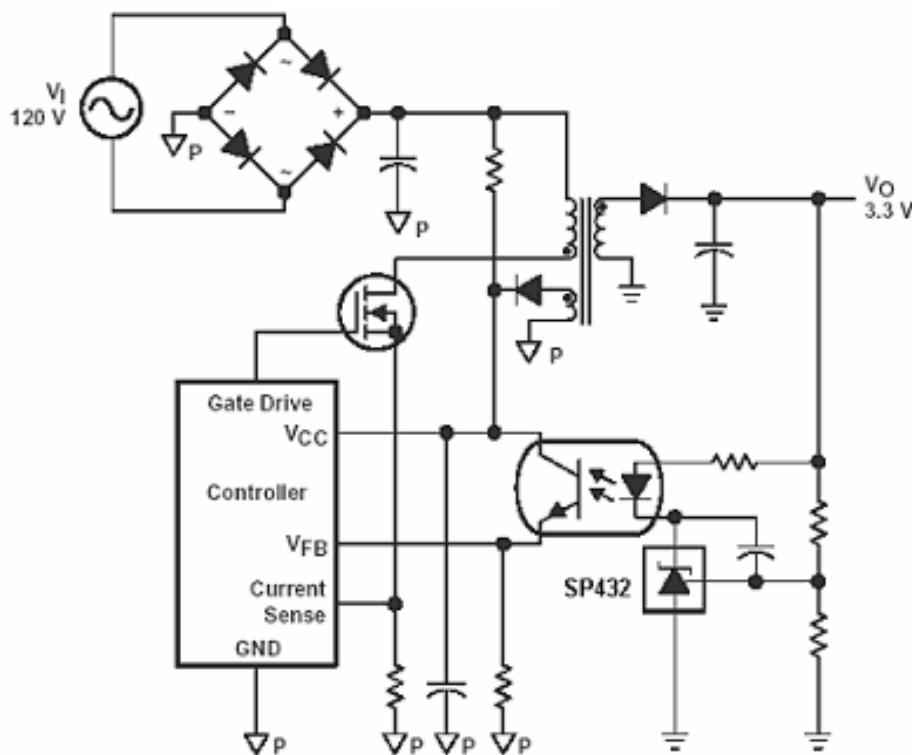


Figure 5. Flyback with isolation using SP432 as voltage reference and error amplifier







\* To improve the stability of output voltage, Figure 4, a 0.1uf capacitor is recommended between cathode to anode



# SP432

## Low Voltage Adjustable Precision Shunt Regulators

### PERFORMANCE CHARACTERISTICS

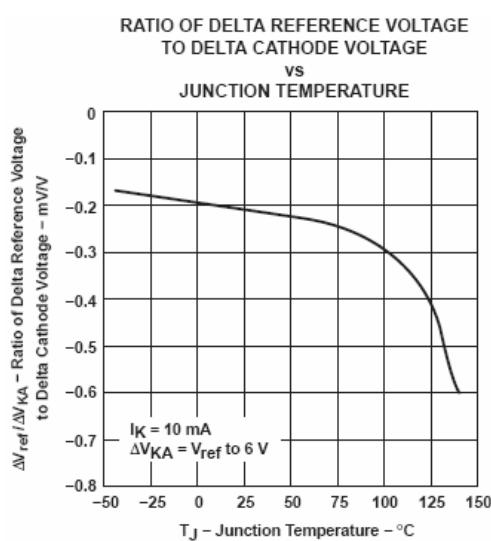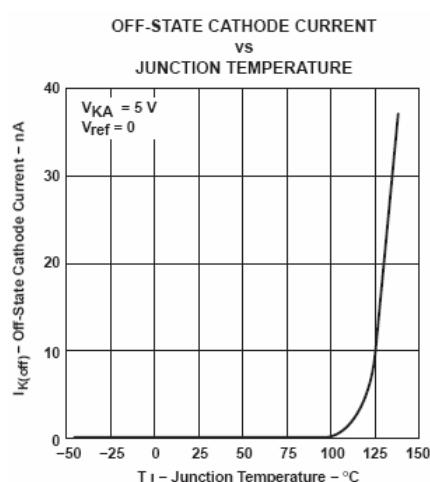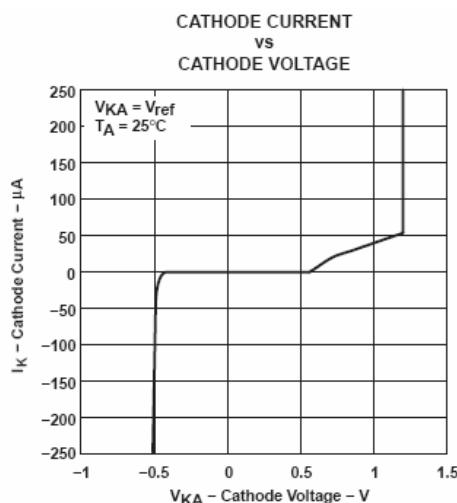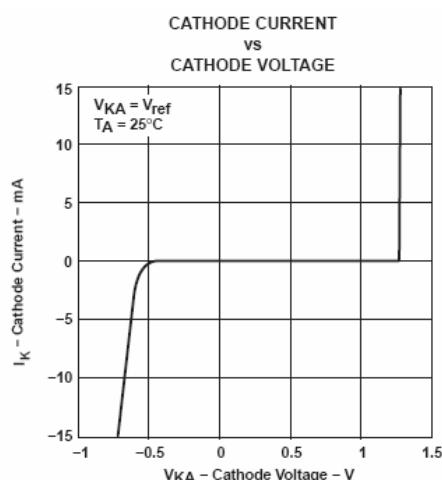
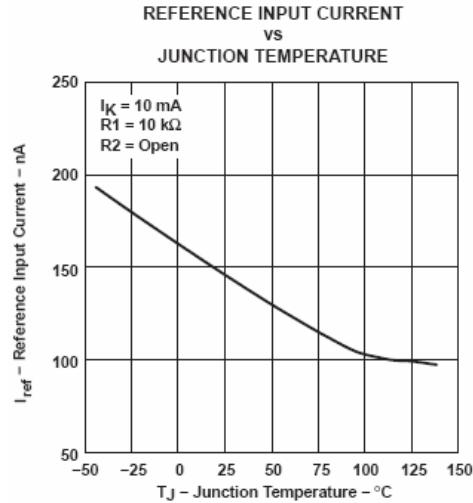
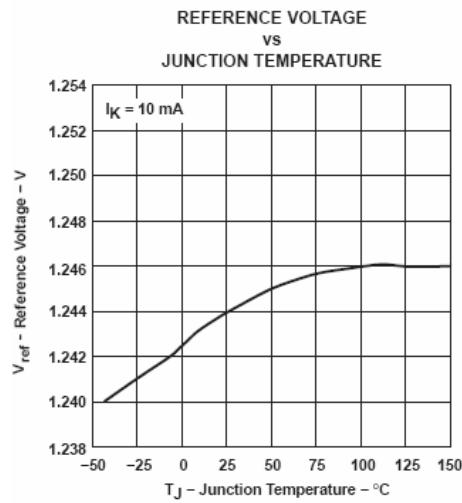





# SP432

## Low Voltage Adjustable Precision Shunt Regulators

### PERFORMANCE CHARACTERISTICS

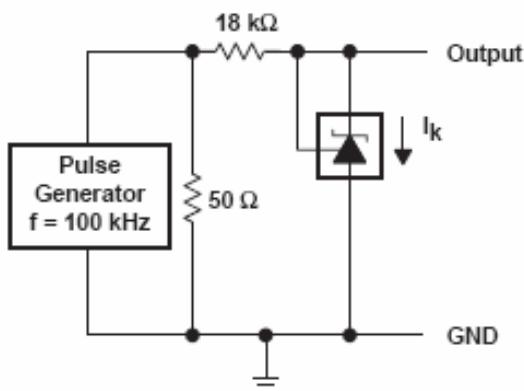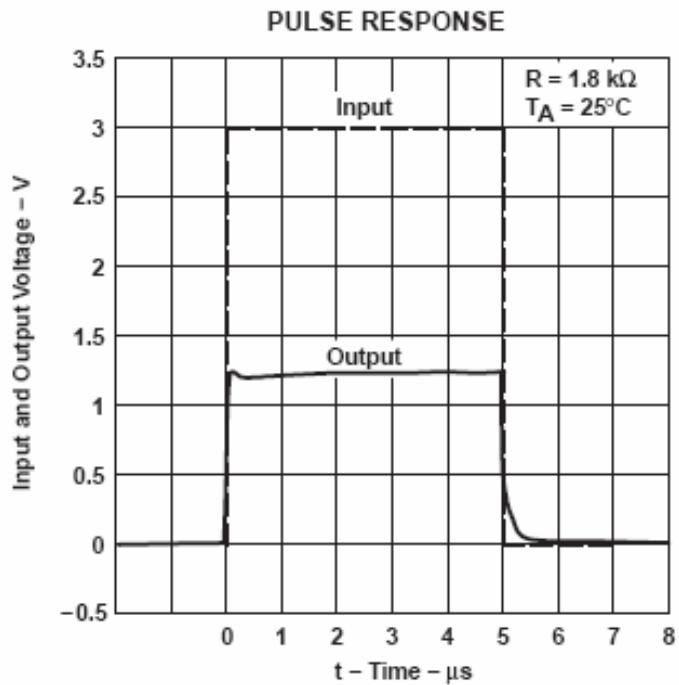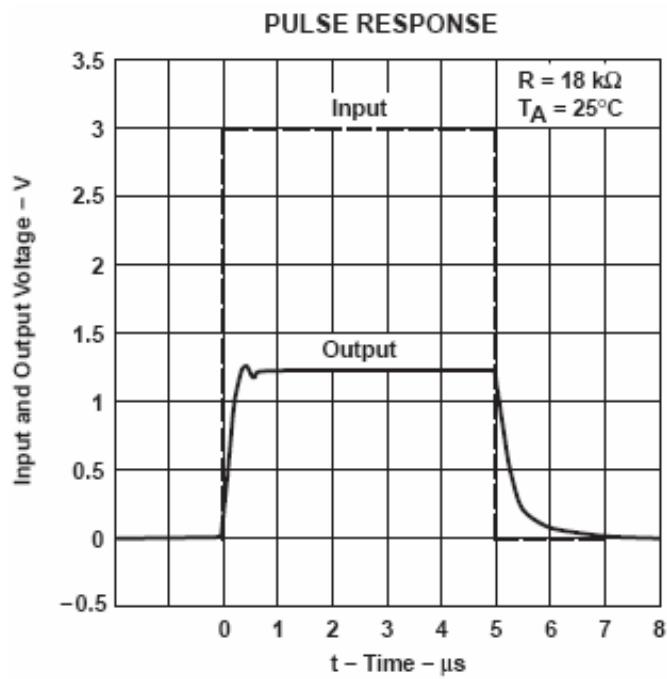

TEST CIRCUIT FOR PULSE RESPONSE

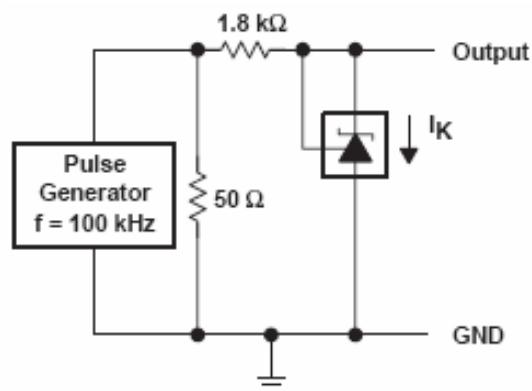

TEST CIRCUIT FOR PULSE RESPONSE




# SP432

## Low Voltage Adjustable Precision Shunt Regulators



### PERFORMANCE CHARACTERISTICS

SMALL-SIGNAL VOLTAGE GAIN/PHASE MARGIN


vs  
FREQUENCY

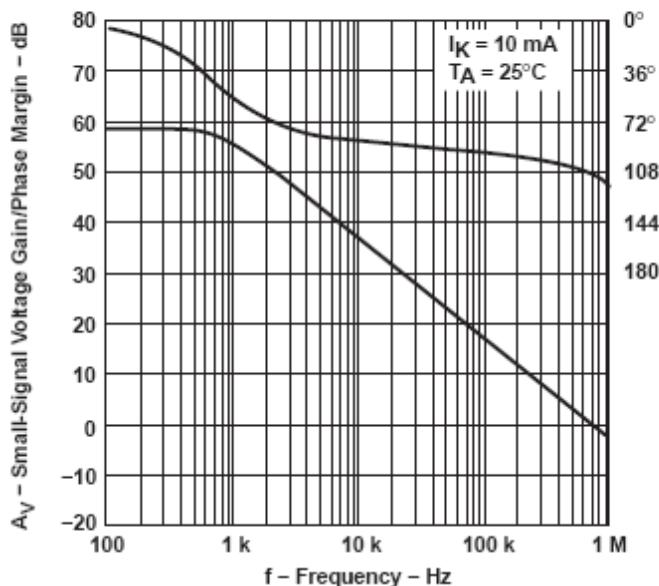

REFERENCE IMPEDANCE  
vs  
FREQUENCY

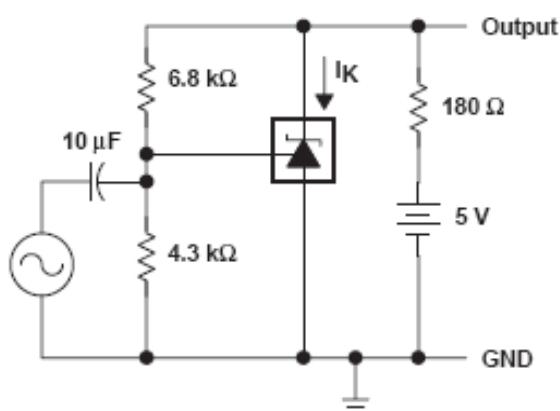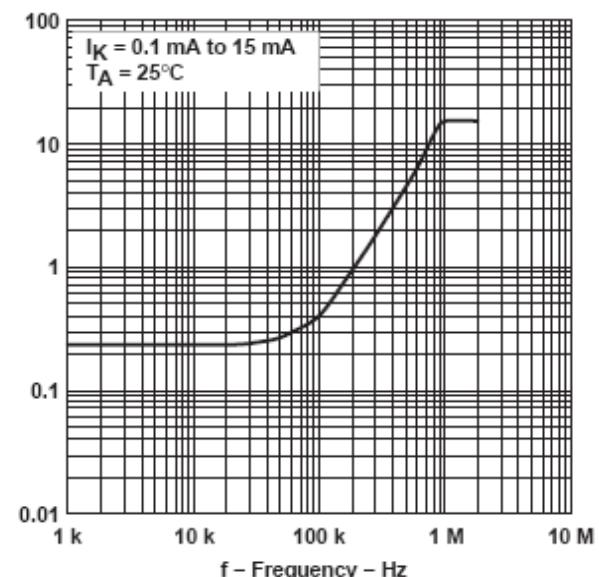

TEST CIRCUIT FOR VOLTAGE GAIN  
AND PHASE MARGIN

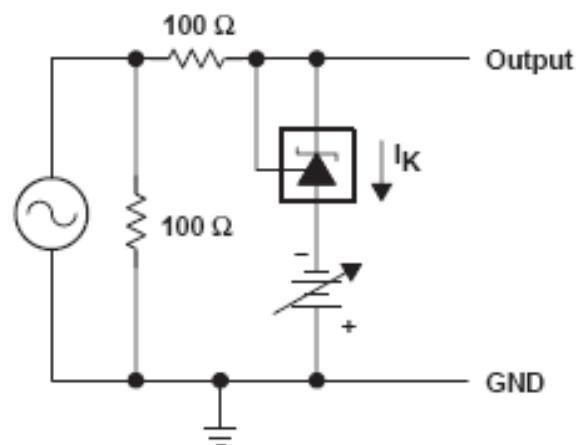

TEST CIRCUIT FOR REFERENCE IMPEDANCE




# SP432



## Low Voltage Adjustable Precision Shunt Regulators

### PERFORMANCE CHARACTERISTICS


STABILITY BOUNDARY CONDITION

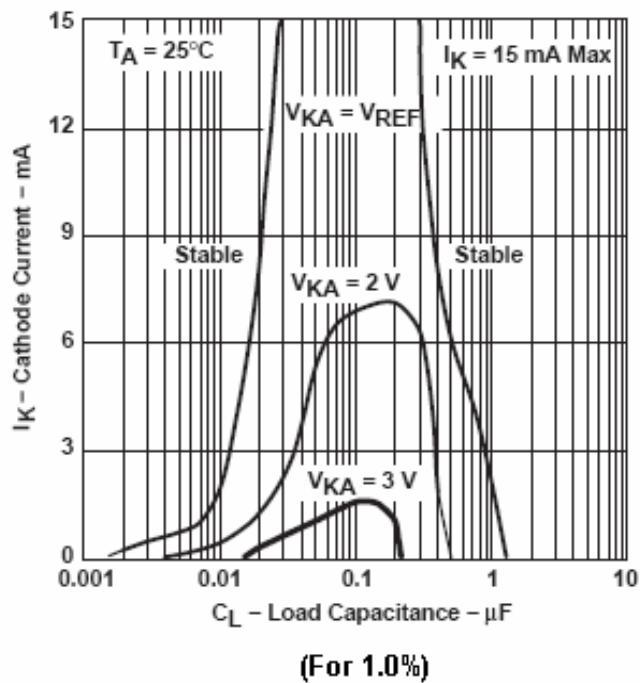

STABILITY BOUNDARY CONDITION‡

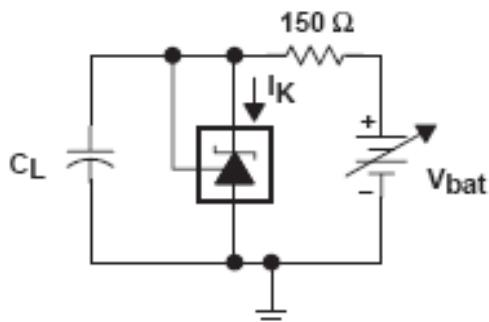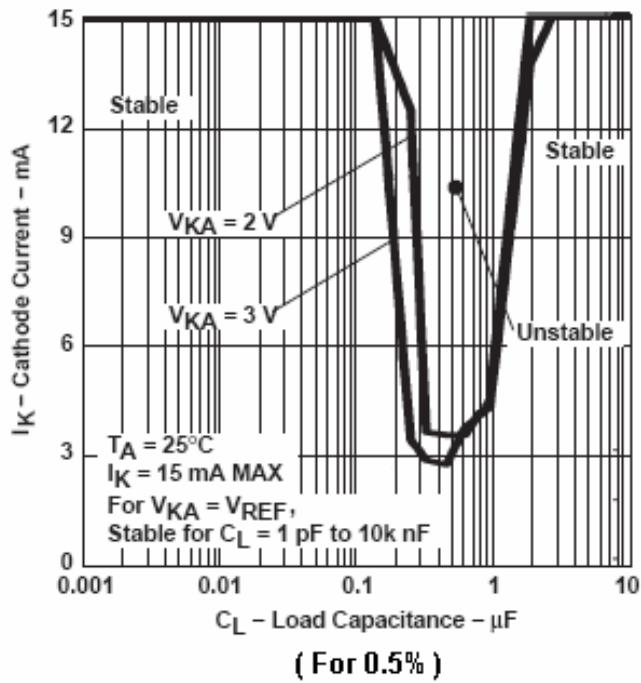

TEST CIRCUIT FOR  $V_{KA} = V_{REF}$

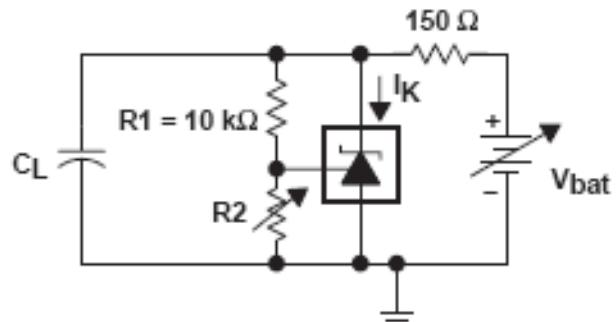


TEST CIRCUIT FOR  $V_{KA} = 2\text{ V}, 3\text{ V}$



# SP432

## Low Voltage Adjustable Precision Shunt Regulators

### SOT-23 PACKAGE OUTLINE

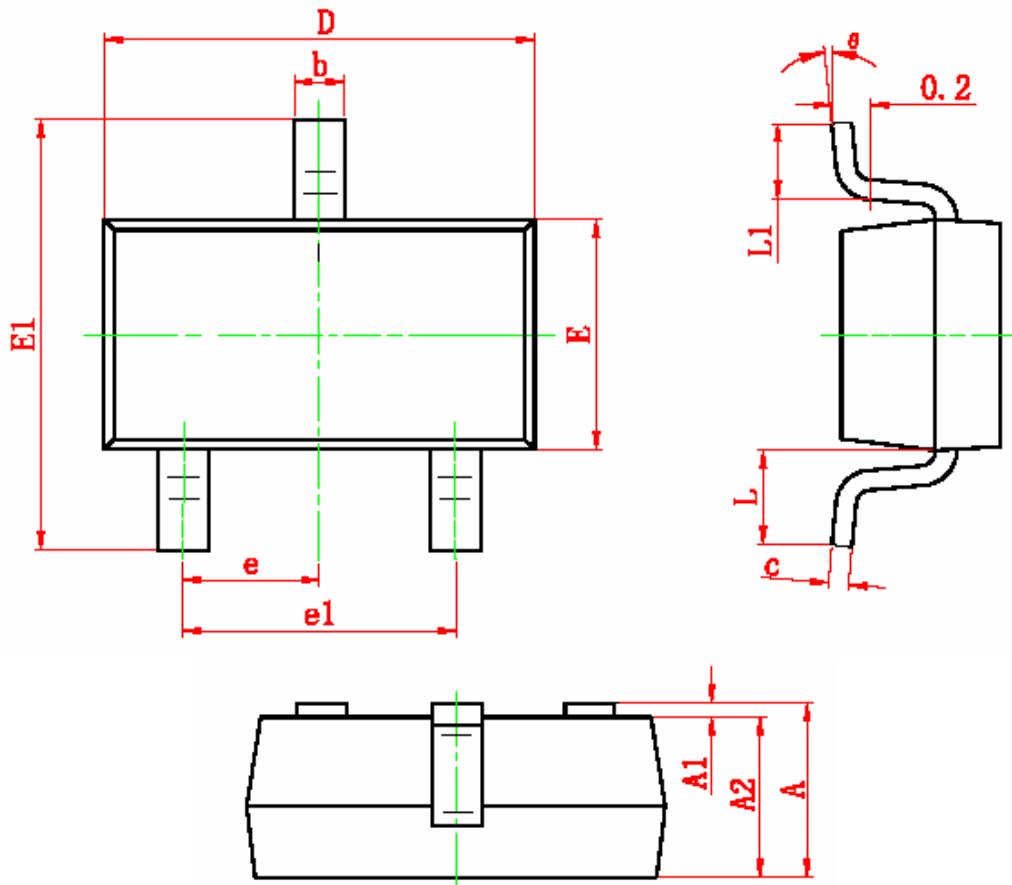


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.200	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.100	0.035	0.039
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	6°



# SP432

## Low Voltage Adjustable Precision Shunt Regulators

### SOT-23-5L PACKAGE OUTLINE

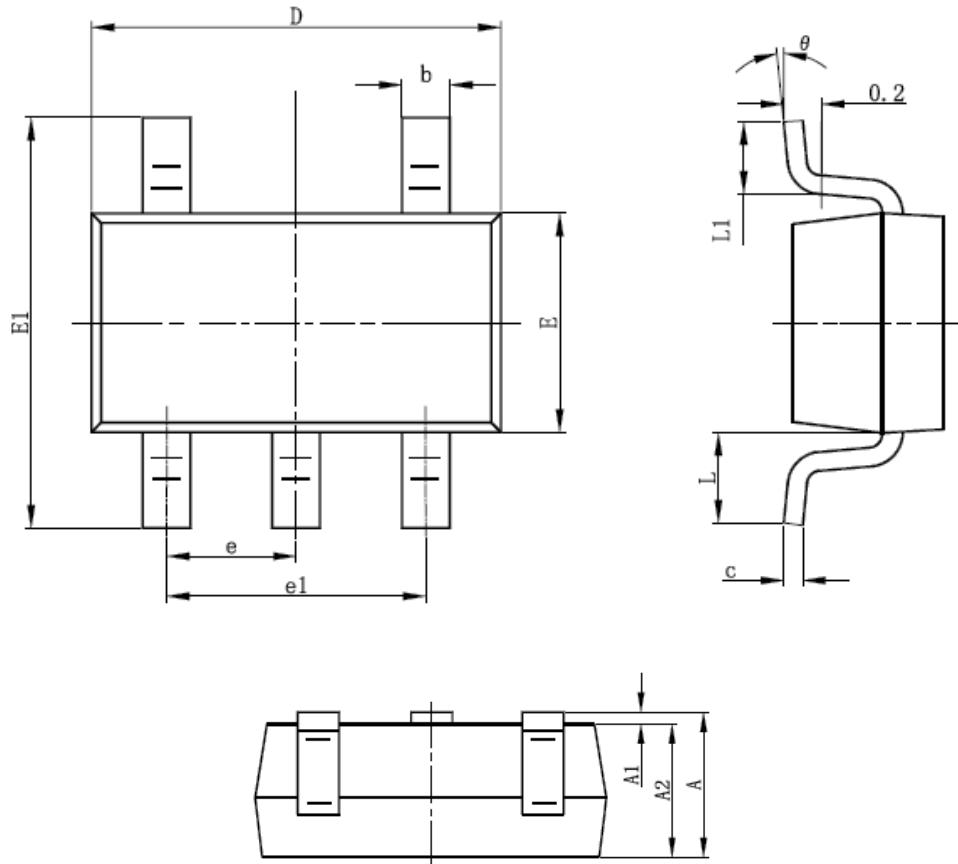


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.400	0.012	0.016
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.700REF		0.028REF	
L1	0.300	0.600	0.012	0.024
theta	0°	8°	0°	8°



# SP432

## Low Voltage Adjustable Precision Shunt Regulators

### TO-92 PACKAGE OUTLINE

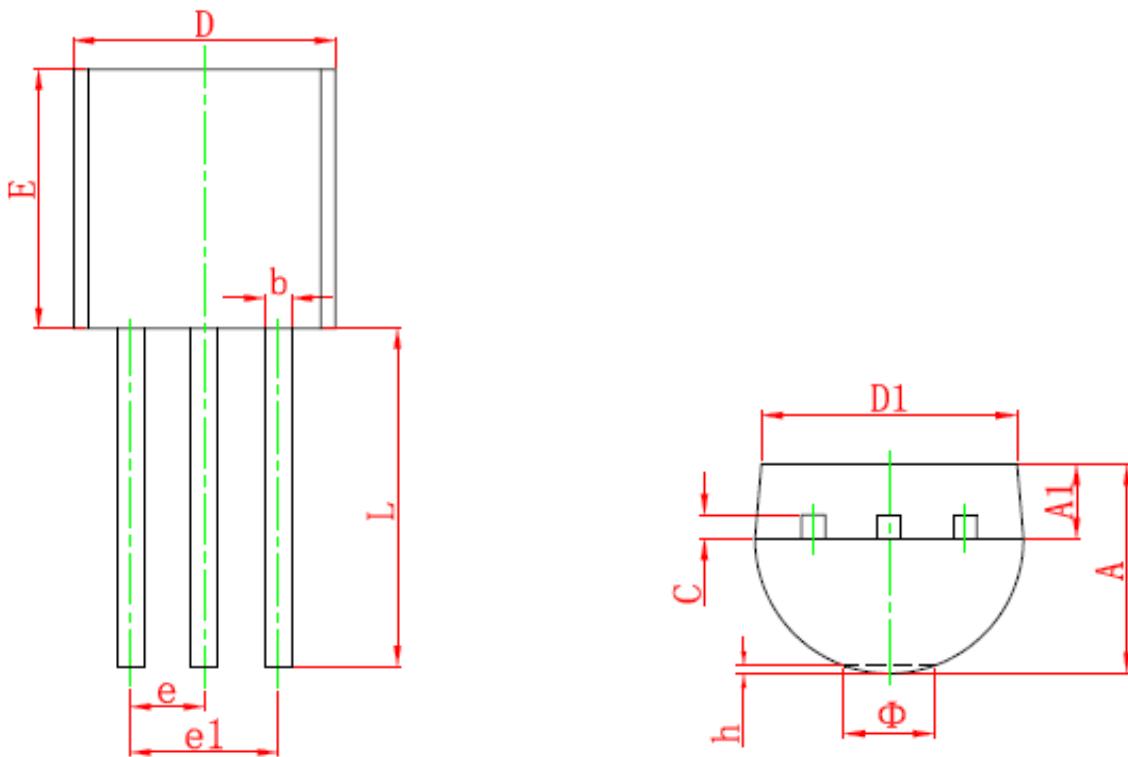


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.400	4.700	0.173	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015



# SP432

## Low Voltage Adjustable Precision Shunt Regulators

### SOT-353 PACKAGE OUTLINE

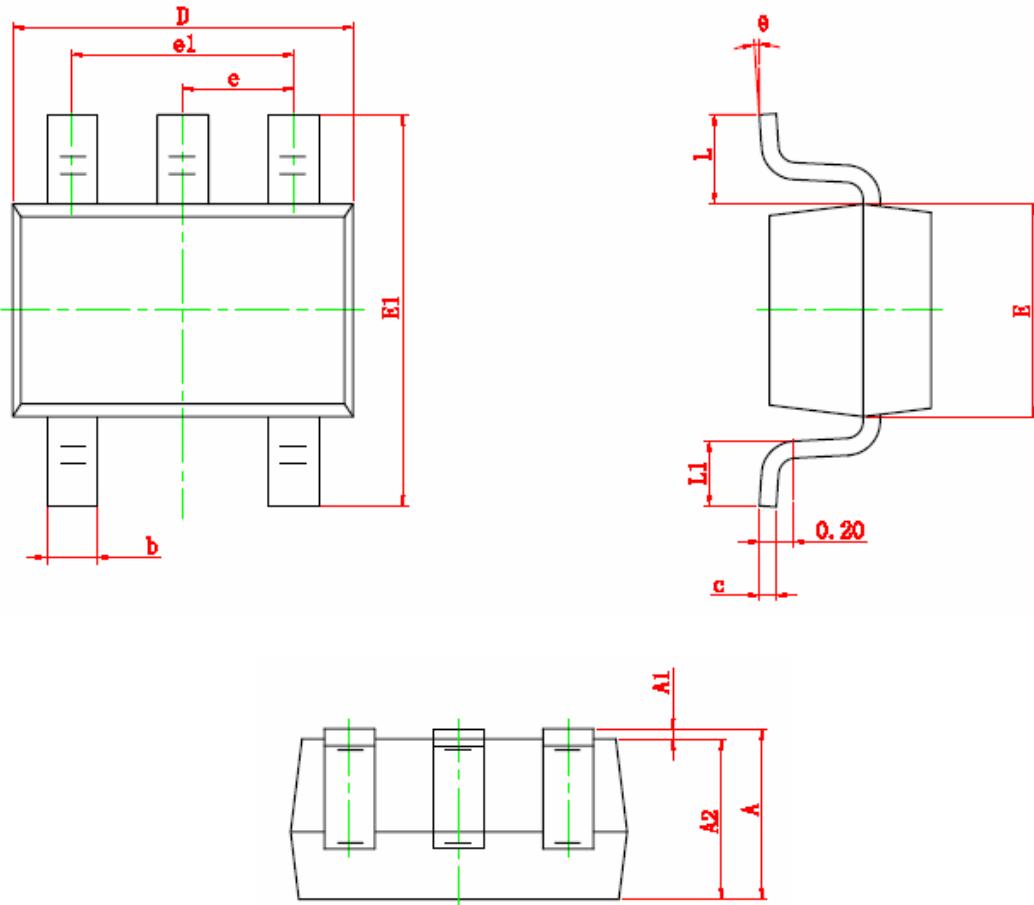

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°



# SP432

## Low Voltage Adjustable Precision Shunt Regulators

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties which may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

©The SYNC Power logo is a registered trademark of SYNC Power Corporation

©2004 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved

SYNC Power Corporation

9F-5, No.3-2, Park Street

NanKang District (NKSP), Taipei, Taiwan 115

Phone: 886-2-2655-8178

Fax: 886-2-2655-8468

©<http://www.syncpower.com>