


Current Transducer LA 25-NP/SP11

$$I_{PN} = 1 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



Electrical data

I_{PN}	Primary nominal r.m.s. current	1	A
I_P	Primary current, measuring range	0 .. ± 1.5	A
R_M	Measuring resistance with ± 15 V	R_{Mmin}	R_{Mmax}
		@ ± 1.0 A _{max}	100 320 Ω
		@ ± 1.5 A _{max}	100 190 Ω
I_{SN}	Secondary nominal r.m.s. current	25	mA
K_N	Conversion ratio	25 : 1000	
V_C	Supply voltage (± 5 %)	± 15	V
I_C	Current consumption	10 + I_S	mA
V_d	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	2.5	kV
V_b	R.m.s. rated voltage ¹⁾ , safe separation basic isolation	600	V
		1700	V

Features

- Closed loop (compensated) multi-turns current transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0.

Special features

- $I_{PN} = 1 \text{ A}$
- $I_P = 0 .. ± 1.5 \text{ A}$
- $K_N = 25 : 1000$

Accuracy - Dynamic performance data

X	Typical accuracy @ I_{PN} , $T_A = 25^\circ\text{C}$	± 0.5	%	
e_L	Linearity	< 0.2	%	
I_O	Offset current ²⁾ @ $I_P = 0$, $T_A = 25^\circ\text{C}$	Typ	Max	
		± 0.05	± 0.15	
I_{OM}	Residual current ³⁾ @ $I_P = 0$, after an overload of $3 \times I_{PN}$	± 0.05	± 0.15	
I_{OT}	Thermal drift of I_O	0°C .. + 25°C	± 0.06	± 0.25
		+ 25°C .. + 70°C	± 0.10	± 0.35
t_r	Response time ⁴⁾ @ 90 % of I_{Pmax}	< 1	µs	
f	Frequency bandwidth (- 1 dB)	DC .. 150	kHz	

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

General data

T_A	Ambient operating temperature	0 .. + 70	°C
T_S	Ambient storage temperature	- 25 .. + 85	°C
R_P	Primary coil resistance @ $T_A = 25^\circ\text{C}$	< 51	mΩ
R_S	Secondary coil resistance @ $T_A = 70^\circ\text{C}$	110	Ω
L_P	Primary insertion inductance	31	µH
R_{IS}	Isolation resistance @ 500 V, $T_A = 25^\circ\text{C}$	> 1500	MΩ
m	Mass	22	g
	Standards ⁵⁾	EN 50178	

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Notes : ¹⁾ Pollution class 2

²⁾ Measurement carried out after 15 mn functioning


³⁾ The result of the coercive field of the magnetic circuit

⁴⁾ With a di/dt of 100 A/µs

⁵⁾ A list of corresponding tests is available

990125/1

Dimensions LA 25-NP/SP11 (in mm. 1 mm = 0.0394 inch)

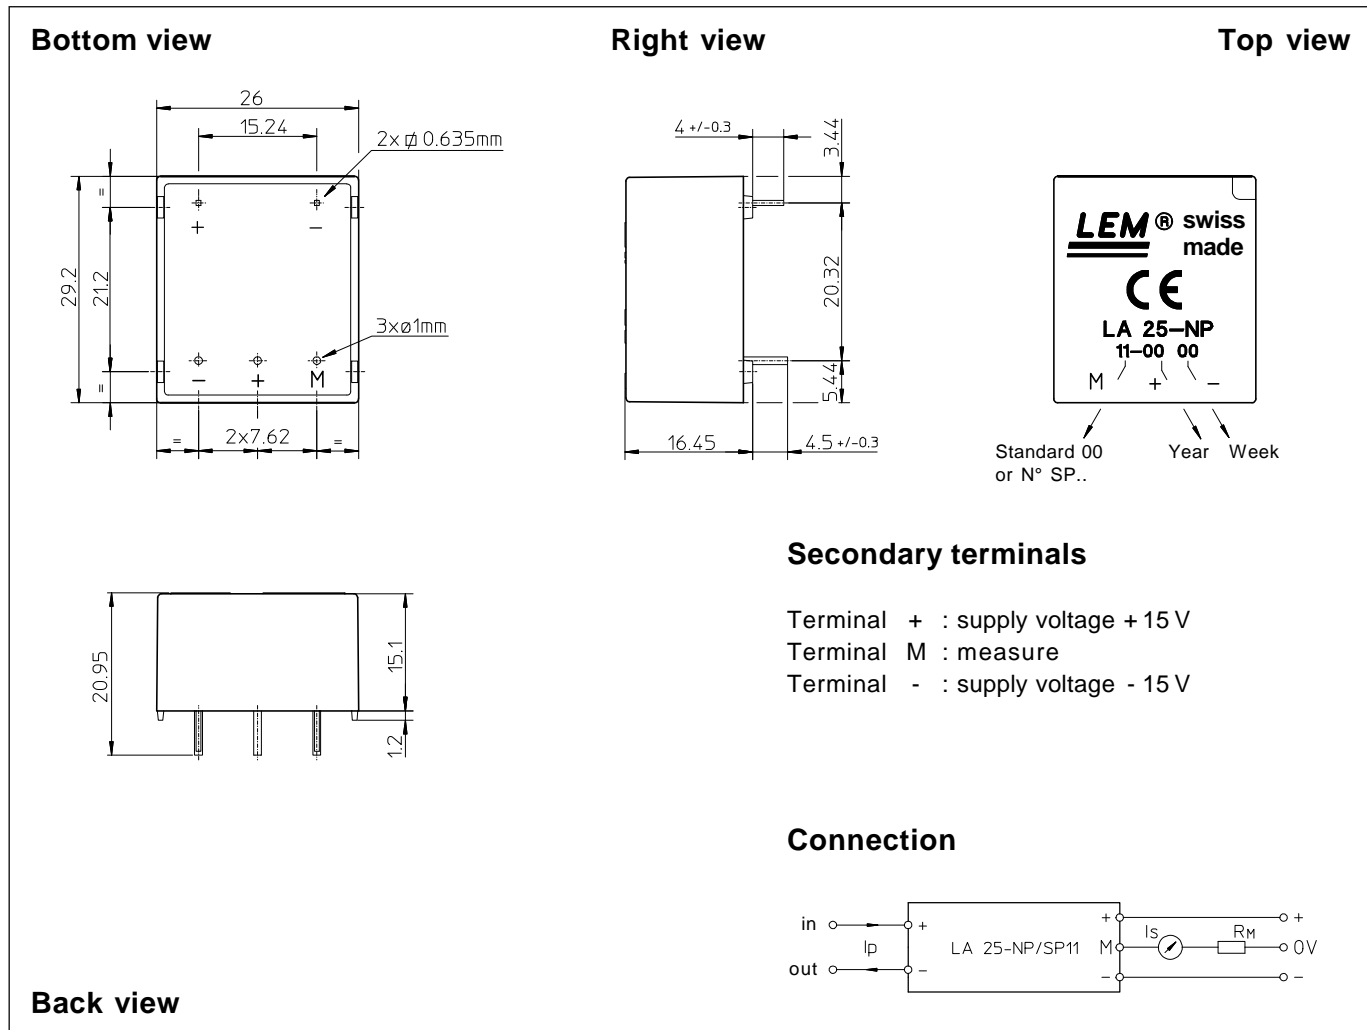

Mechanical characteristics

- General tolerance ± 0.2 mm
- Fastening & connection of primary 2 pins
0.635 x 0.635 mm
- Fastening & connection of secondary 3 pins $\varnothing 1$ mm
- Recommended PCB hole 1.2 mm

Remark

- I_s is positive when I_p flows from terminal + to terminal -.