

TRIAC(Through Hole / Isolated)

TMG16C80J


SanRex Triac TMG16C80J is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_T(RMS)=16A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

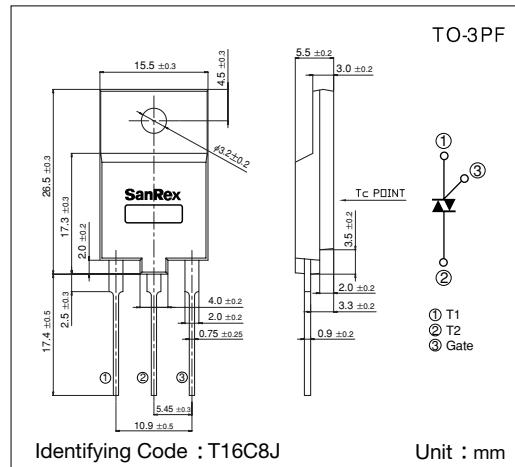

Maximum Ratings

($T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V_{DRM}	Repetitive Peak Off-State Voltage		800	V
$I_{T(RMS)}$	R.M.S. On-State Current	$T_c=91^\circ\text{C}$	16	A
I_{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	155/170	A
I_{ft}	I_{ft} (for fusing)		120	A^2s
P_{GM}	Peak Gate Power Dissipation		5	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.5	W
I_{GM}	Peak Gate Current		2	A
V_{GM}	Peak Gate Voltage		10	V
V_{ISO}	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	1500	V
T_j	Operating Junction Temperature		$-40 \sim +125$	$^\circ\text{C}$
T_{stg}	Storage Temperature		$-40 \sim +150$	$^\circ\text{C}$
	Mass		5.6	g

Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current	$V_D=V_{DRM}$, Single phase, half wave, $T_j=125^\circ\text{C}$			2	mA
V_{TM}	Peak On-State Voltage	$I_t=25\text{A}$, Inst. measurement			1.4	V
I_{GT1}^+ 1	Gate Trigger Current	$V_D=6\text{V}$, $R_L=10\Omega$			30	mA
I_{GT1}^- 2					30	
I_{GT3}^+ 3					—	
I_{GT3}^- 4					30	
V_{GT1}^+ 1	Gate Trigger Voltage				1.5	V
V_{GT1}^- 2					1.5	
V_{GT3}^+ 3					—	
V_{GT3}^- 4					1.5	
V_{GD}	Non-Trigger Gate Voltage	$T_j=125^\circ\text{C}$, $V_D=1/2V_{DRM}$	0.2			V
$[dv/dt]_c$	Critical Rate of Rise of Off-State Voltage at Commutation	$T_j=125^\circ\text{C}$, $[di/dt]_c=-8\text{A/ms}$, $V_D=400\text{V}$	10			$\text{V}/\mu\text{s}$
I_H	Holding Current			25		mA
R_{th}	Thermal Resistance	Junction to case			1.8	$^\circ\text{C/W}$

Trigger mode of the triac

