

Silicon NPN Power Transistors

2SC2922

**DESCRIPTION**

- With MT-200 package
- Complement to type 2SA1216

**APPLICATIONS**

- Audio and general purpose

**PINNING(see Fig.2)**

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

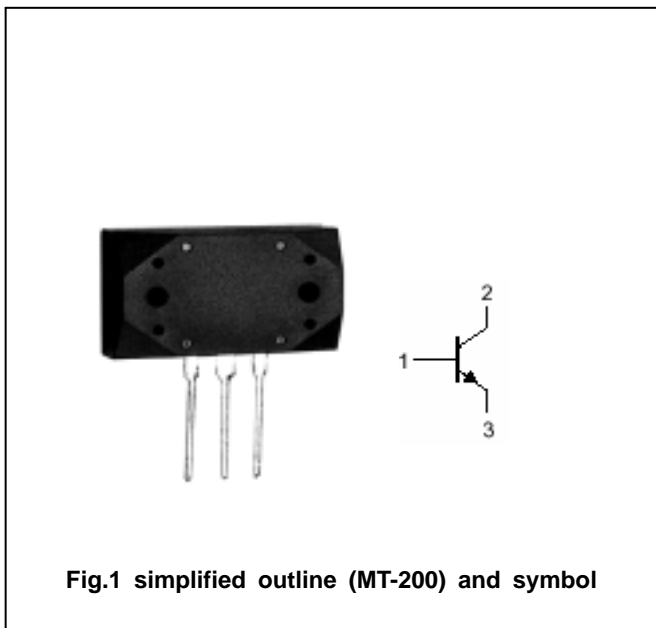


Fig.1 simplified outline (MT-200) and symbol

**Absolute maximum ratings(Ta=25 )**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	Open emitter	180	V
V <sub>CEO</sub>	Collector-emitter voltage	Open base	180	V
V <sub>EBO</sub>	Emitter-base voltage	Open collector	5	V
I <sub>C</sub>	Collector current		17	A
I <sub>B</sub>	Base current		5	A
P <sub>C</sub>	Collector power dissipation	T <sub>C</sub> =25	200	W
T <sub>j</sub>	Junction temperature		150	
T <sub>stg</sub>	Storage temperature		-55~150	

## Silicon NPN Power Transistors

## 2SC2922

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	I <sub>C</sub> =25mA ; I <sub>B</sub> =0	180			V
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =8A I <sub>B</sub> =0.8A			2.0	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =180V; I <sub>E</sub> =0			100	μ A
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =5V; I <sub>C</sub> =0			100	μ A
h <sub>FE</sub>	DC current gain	I <sub>C</sub> =8A ; V <sub>CE</sub> =4V	30			
C <sub>ob</sub>	Output capacitance	I <sub>E</sub> =0 ; V <sub>CB</sub> =10V;f=1MHz		250		pF
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =2A ; V <sub>CE</sub> =12V		50		MHz

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =10A;R <sub>L</sub> =4 I <sub>B1</sub> =- I <sub>B2</sub> =1A V <sub>CC</sub> =40V		0.20		μ s
t <sub>s</sub>	Storage time			1.30		μ s
t <sub>f</sub>	Fall time			0.45		μ s

◆ h<sub>FE</sub> classifications

O	Y	P	G
30-60	50-100	70-140	90-180

PACKAGE OUTLINE

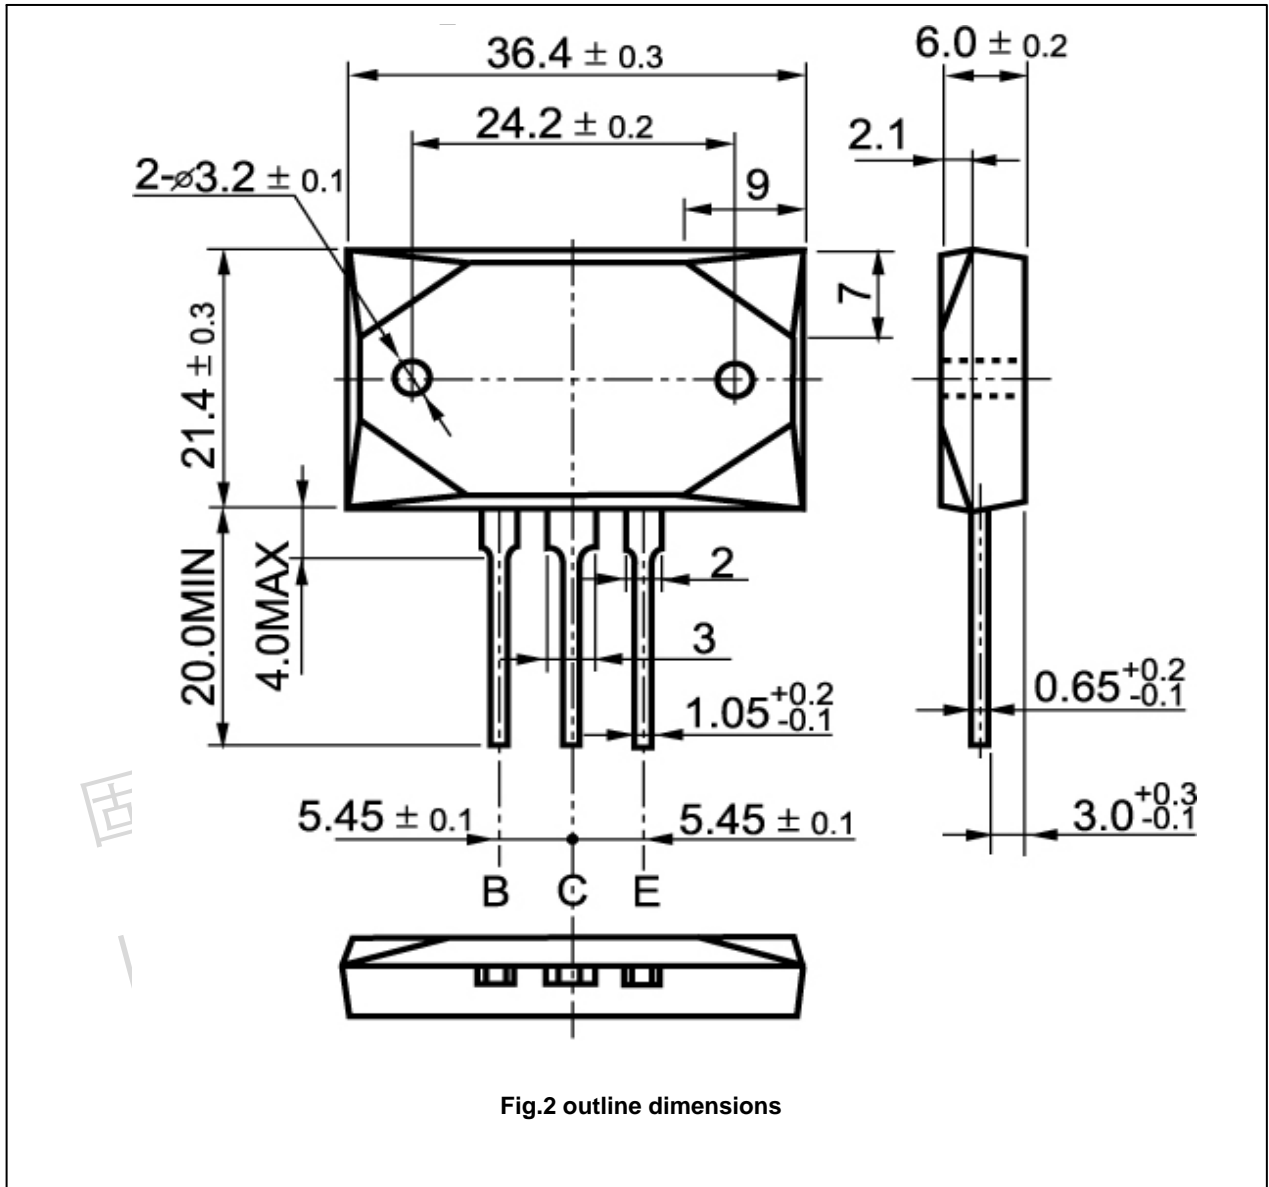


Fig.2 outline dimensions

Silicon NPN Power Transistors

2SC2922

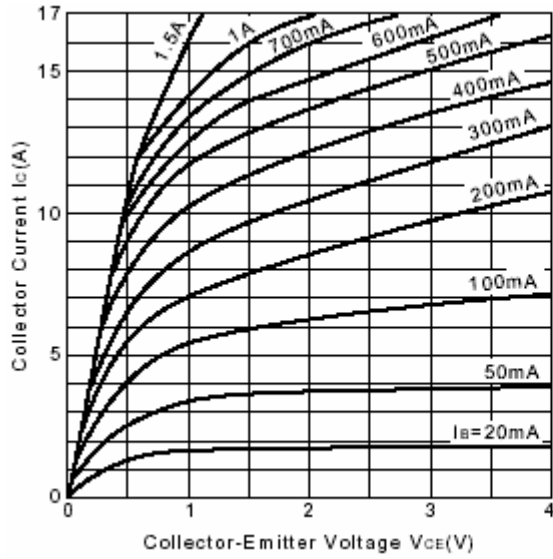


Fig.3 Static Characteristic

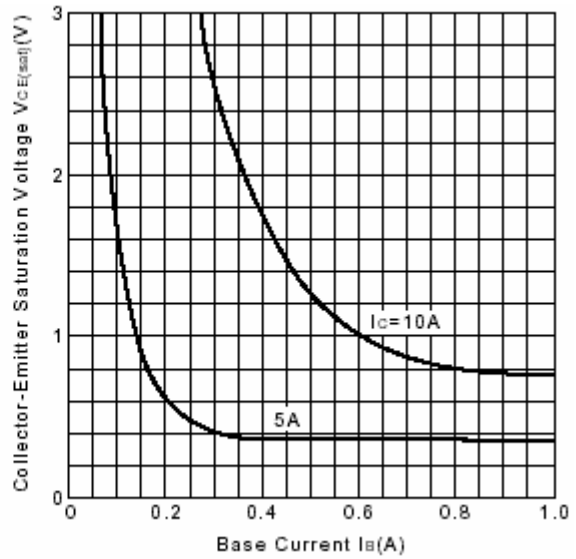


Fig.4  $V_{CE(sat)}-I_B$

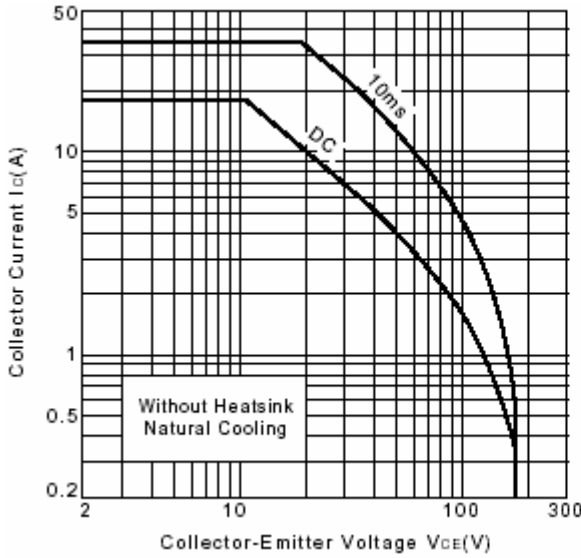


Fig.5 Safe Operating Area

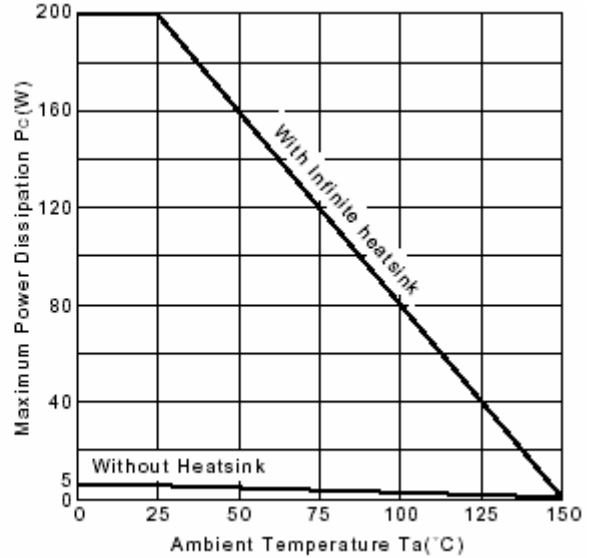


Fig.6 Power Derating

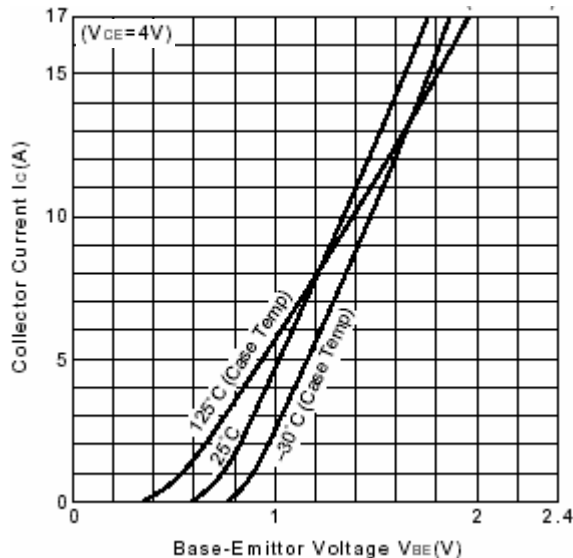


Fig.7  $I_C-V_{BE}$

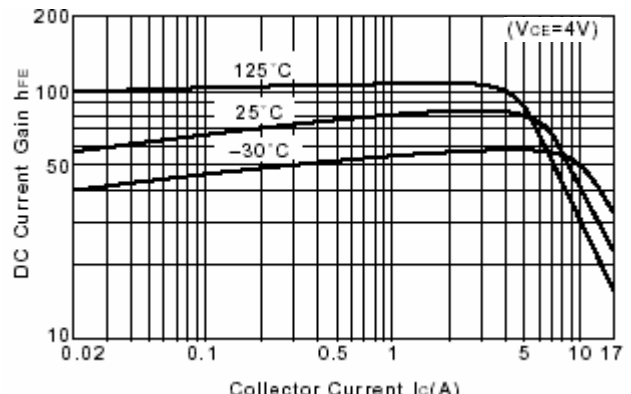


Fig.8 DC current Gain