


## Positive Voltage Regulator


**Pb** Lead(Pb)-Free

### Features:

- \* Maximum Output current  $I_o$ : 0.1 A
- \* Output voltage  $V_o$ : 5V~18V
- \* Continuous total dissipation:  $P_D$ : 0.625 W ( $T_a = 25^\circ C$ )

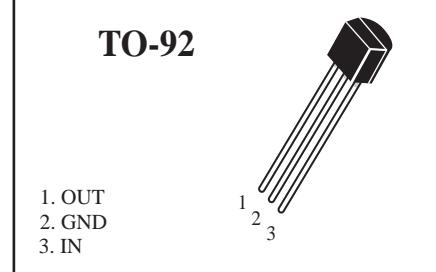

### Typical Application

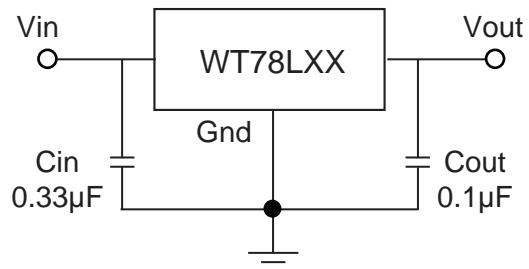

### Absolute Maximum Ratings

Parameter	Ratings	Unit
Input Voltage	WT78L05~09	30
	WT78L12~18	35
Output Current	100	mA
Power Dissipation	625	mW
Operating Junction Temperature Range	0 ~ +125	°C
Storage temperature range	-55 ~ +150	°C

## Electrical Characteristics at Specified Virtual Junction Temperature

WT78L05 (Refer to the test circuits,  $T_j=0\sim125^\circ C$ ,  $I_O=40mA$ ,  $V_{in}=10V$ ,  $C_{in}=0.33\mu F$ ,  $C_O=0.1\mu F$  unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit
Output Voltage $T_j=25^\circ C$ $7V \leq V_{in} \leq 20V$ , $I_O=1mA\sim40mA$ , $T_j=0\sim125^\circ C$ $I_O=1mA\sim70mA$ , $T_j=0\sim125^\circ C$	$V_O$	4.8 4.75 4.75	5.0 5.0 5.0	5.2 5.25 5.25	V
Load Regulation $I_O=1\sim100mA$ , $T_j=25^\circ C$ $I_O=1\sim40mA$ , $T_j=25^\circ C$	$\Delta V_O$	- -	15 8	60 30	mV
Line Regulation $7V \leq V_{in} \leq 20V$ $8V \leq V_{in} \leq 20V$ , $T_j=25^\circ C$	$\Delta V_O$	- -	32 26	150 100	mV
Quiescent Current $T_j=25^\circ C$	$I_Q$	-	3.8	6.0	mA
Quiescent Current Change $8V \leq V_{in} \leq 20V$ , $T_j=0\sim125^\circ C$ $1mA \leq I_O \leq 40mA$ , $T_j=0\sim125^\circ C$	$\Delta I_Q$	- -	- -	1.5 0.1	mA
Output Noise Voltage $10Hz \leq f \leq 100KHz$ , $T=25^\circ C$	$V_n$	-	42	-	µV
Ripple Rejection $8V \leq V_{in} \leq 20V$ , $f=120Hz$ , $T_j=0\sim125^\circ C$	RR	41	49	-	dB
Dropout Voltage $T=25^\circ C$	$V_D$	-	1.7	-	V

WT78L06 (Refer to the test circuits,  $T_j=0\sim125^\circ C$ ,  $I_O=40mA$ ,  $V_{in}=11V$ ,  $C_{in}=0.33\mu F$ ,  $C_O=0.1\mu F$  unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit
Output Voltage $T_j=25^\circ C$ $8V \leq V_{in} \leq 20V$ , $I_O=1mA\sim40mA$ , $T_j=0\sim125^\circ C$ $I_O=1mA\sim70mA$ , $T_j=0\sim125^\circ C$	$V_O$	5.75 5.7 5.7	6.0 6.0 6.0	6.25 6.3 6.3	V
Load Regulation $I_O=1\sim100mA$ , $T_j=25^\circ C$ $I_O=1\sim40mA$ , $T_j=25^\circ C$	$\Delta V_O$	- -	16 9	80 40	mV
Line Regulation $8V \leq V_{in} \leq 20V$ , $T_j=25^\circ C$ $9V \leq V_{in} \leq 20V$ , $T_j=25^\circ C$	$\Delta V_O$	- -	35 29	175 125	mV
Quiescent Current $T_j=25^\circ C$	$I_Q$	-	3.9	6.0	mA
Quiescent Current Change $9V \leq V_{in} \leq 20V$ , $T_j=0\sim125^\circ C$ $1mA \leq I_O \leq 40mA$ , $T_j=0\sim125^\circ C$	$\Delta I_Q$	- -	- -	1.5 0.1	mA
Output Noise Voltage $10Hz \leq f \leq 100KHz$ , $T=25^\circ C$	$V_n$	-	46	-	µV
Ripple Rejection $9V \leq V_{in} \leq 19V$ , $f=120Hz$ , $T_j=0\sim125^\circ C$	RR	40	48	-	dB
Dropout Voltage $T=25^\circ C$	$V_D$	-	1.7	-	V

WT78L08 (Refer to the test circuits,  $T_j=0\sim125^\circ C$ ,  $I_O=40mA$ ,  $V_{in}=14V$ ,  $C_{in}=0.33\mu F$ ,  $C_O=0.1\mu F$  unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit
Output Voltage $T_j=25^\circ C$ $10.5V \leq V_{in} \leq 23V$ , $I_O=1mA \sim 40mA$ , $T_j=0\sim125^\circ C$ $I_O=1mA \sim 70mA$ , $T_j=0\sim125^\circ C$	$V_O$	7.7 7.6 7.6	8.0 8.0 8.0	8.3 8.4 8.4	V
Load Regulation $I_O=1\sim100mA$ , $T_j=25^\circ C$ $I_O=1\sim40mA$ , $T_j=25^\circ C$	$\Delta V_O$	- -	18 10	80 40	mV
Line Regulation $10.5V \leq V_{in} \leq 23V$ $11V \leq V_{in} \leq 23V$ , $T_j=25^\circ C$	$\Delta V_O$	- -	42 36	175 125	mV
Quiescent Current $T_j=25^\circ C$	$I_Q$	-	4	6.0	mA
Quiescent Current Change $11V \leq V_{in} \leq 23V$ , $T_j=0\sim125^\circ C$ $1mA \leq I_O \leq 40mA$ , $T_j=0\sim125^\circ C$	$\Delta I_Q$	- -	-	1.5 0.1	mA
Output Noise Voltage $10Hz \leq f \leq 100KHz$ , $T=25^\circ C$	$V_n$	-	54	-	µV
Ripple Rejection $13V \leq V_{in} \leq 23V$ , $f=120Hz$ , $T_j=0\sim125^\circ C$	RR	37	46	-	dB
Dropout Voltage $T=25^\circ C$	$V_D$	-	1.7	-	V

WT78L09 (Refer to the test circuits,  $T_j=0\sim125^\circ C$ ,  $I_O=40mA$ ,  $V_{in}=16V$ ,  $C_{in}=0.33\mu F$ ,  $C_O=0.1\mu F$  unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit
Output Voltage $T_j=25^\circ C$ $12V \leq V_{in} \leq 24V$ , $I_O=1mA \sim 40mA$ , $T_j=0\sim125^\circ C$ $I_O=1mA \sim 70mA$ , $T_j=0\sim125^\circ C$	$V_O$	8.64 8.55 8.55	9.0 9.0 9.0	9.36 9.45 9.45	V
Load Regulation $I_O=1\sim100mA$ , $T_j=25^\circ C$ $I_O=1\sim40mA$ , $T_j=25^\circ C$	$\Delta V_O$	- -	19 11	90 40	mV
Line Regulation $12V \leq V_{in} \leq 24V$ , $T_j=25^\circ C$ $13V \leq V_{in} \leq 24V$ , $T_j=25^\circ C$	$\Delta V_O$	- -	45 40	175 125	mV
Quiescent Current $T_j=25^\circ C$	$I_Q$	-	4.1	6.0	mA
Quiescent Current Change $13V \leq V_{in} \leq 24V$ , $T_j=0\sim125^\circ C$ $1mA \leq I_O \leq 40mA$ , $T_j=0\sim125^\circ C$	$\Delta I_Q$	- -	-	1.5 0.1	mA
Output Noise Voltage $10Hz \leq f \leq 100KHz$ , $T=25^\circ C$	$V_n$	-	58	-	µV
Ripple Rejection $15V \leq V_{in} \leq 25V$ , $f=120Hz$ , $T_j=0\sim125^\circ C$	RR	-	45	-	dB
Dropout Voltage $T=25^\circ C$	$V_D$	-	1.7	-	V

WT78L12 (Refer to the test circuits,  $T_j=0\sim125^\circ C$ ,  $I_O=40mA$ ,  $V_{in}=19V$ ,  $C_{in}=0.33\mu F$ ,  $C_O=0.1\mu F$  unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit
Output Voltage $T_j=25^\circ C$ $14V \leq V_{in} \leq 27V$ , $I_O=1mA\sim40mA$ , $T_j=0\sim125^\circ C$ $I_O=1mA\sim70mA$ , $T_j=0\sim125^\circ C$	$V_O$	11.5 11.4 11.4	12 12 12	12.5 12.6 12.6	V
Load Regulation $I_O=1\sim100mA$ , $T_j=25^\circ C$ $I_O=1\sim40mA$ , $T_j=25^\circ C$	$\Delta V_O$	- -	22 13	100 50	mV
Line Regulation $14.5V \leq V_{in} \leq 27V$ , $T_j=25^\circ C$ $16V \leq V_{in} \leq 27V$ , $T_j=25^\circ C$	$\Delta V_O$	- -	55 49	250 200	mV
Quiescent Current $T_j=25^\circ C$	$I_Q$	-	4.3	6.5	mA
Quiescent Current Change $16V \leq V_{in} \leq 27V$ , $T_j=0\sim125^\circ C$ $1mA \leq I_O \leq 40mA$ , $T_j=0\sim125^\circ C$	$\Delta I_Q$	- -	- -	1.5 0.1	mA
Output Noise Voltage $10Hz \leq f \leq 100KHz$ , $T=25^\circ C$	$V_n$	-	70	-	µV
Ripple Rejection $15V \leq V_{in} \leq 25V$ , $f=120Hz$ , $T_j=0\sim125^\circ C$	RR	37	42	-	dB
Dropout Voltage $T=25^\circ C$	$V_D$	-	1.7	-	V

WT78L15 (Refer to the test circuits,  $T_j=0\sim125^\circ C$ ,  $I_O=40mA$ ,  $V_{in}=23V$ ,  $C_{in}=0.33\mu F$ ,  $C_O=0.1\mu F$  unless otherwise specified)


Parameter	Symbol	Min	Typ	Max	Unit
Output Voltage $T_j=25^\circ C$ $17.5V \leq V_{in} \leq 30V$ , $I_O=1mA\sim40mA$ , $T_j=0\sim125^\circ C$ $V_{in}=23V$ , $I_O=1mA\sim70mA$ , $T_j=0\sim125^\circ C$	$V_O$	14.4 14.25 14.25	15 15 15	15.6 15.75 15.75	V
Load Regulation $V_{in}=23V$ , $I_O=1\sim100mA$ , $T_j=25^\circ C$ $V_{in}=23V$ , $I_O=1\sim40mA$ , $T_j=25^\circ C$	$\Delta V_O$	- -	25 15	150 75	mV
Line Regulation $17.5V \leq V_{in} \leq 30V$ , $I_O=40mA$ , $T_j=25^\circ C$ $19V \leq V_{in} \leq 30V$ , $I_O=40mA$ , $T_j=25^\circ C$	$\Delta V_O$	- -	65 58	300 250	mV
Quiescent Current $T_j=25^\circ C$	$I_Q$	-	4.6	6.5	mA
Quiescent Current Change $19V \leq V_{in} \leq 30V$ , $I_O=40mA$ , $T_j=0\sim125^\circ C$ $1mA \leq I_O \leq 40mA$ , $T_j=0\sim125^\circ C$	$\Delta I_Q$	- -	- -	1.5 0.1	mA
Output Noise Voltage $10Hz \leq f \leq 100KHz$ , $T=25^\circ C$	$V_n$	-	82	-	µV
Ripple Rejection $18.5V \leq V_{in} \leq 28.5V$ , $f=120Hz$ , $T_j=0\sim125^\circ C$	RR	34	39	-	dB
Dropout Voltage $T=25^\circ C$	$V_D$	-	1.7	-	V

WT78L18 (Refer to the test circuits,  $T_j=0\sim125^\circ C$ ,  $I_O=40mA$ ,  $V_{in}=26V$ ,  $C_{in}=0.33\mu F$ ,  $C_O=0.1\mu F$  unless otherwise specified)


Parameter	Symbol	Min	Typ	Max	Unit
Output Voltage $T_j=25^\circ C$ $20.5V \leq V_{in} \leq 33V, I_O=1mA \sim 40mA, T_j=0\sim125^\circ C$ $I_O=1mA \sim 70mA, T_j=0\sim125^\circ C$	$V_O$	17.3 17.1 17.1	18 18 18	18.7 18.9 18.9	V
Load Regulation $I_O=1\sim100mA, T_j=25^\circ C$ $I_O=1\sim40mA, T_j=25^\circ C$	$\Delta V_O$	- -	27 19	180 90	mV
Line Regulation $20.5V \leq V_{in} \leq 33V, T_j=25^\circ C$ $22V \leq V_{in} \leq 33V, T_j=25^\circ C$	$\Delta V_O$	- -	70 64	360 300	mV
Quiescent Current $T_j=25^\circ C$	$I_Q$	-	4.7	6.5	mA
Quiescent Current Change $22V \leq V_{in} \leq 33V, T_j=0\sim125^\circ C$ $1mA \leq I_O \leq 40mA, T_j=0\sim125^\circ C$	$\Delta I_Q$	- -	- -	1.5 0.1	mA
Output Noise Voltage $10Hz \leq f \leq 100KHz, T=25^\circ C$	$V_n$	-	89	-	µV
Ripple Rejection $21.5V \leq V_{in} \leq 31.5V, f=120Hz, T_j=0\sim125^\circ C$	RR	32	36	-	dB
Dropout Voltage $T=25^\circ C$	$V_D$	-	1.7	-	V

## Typical Performance Characteristics


78L05/12/24 Output Characteristics

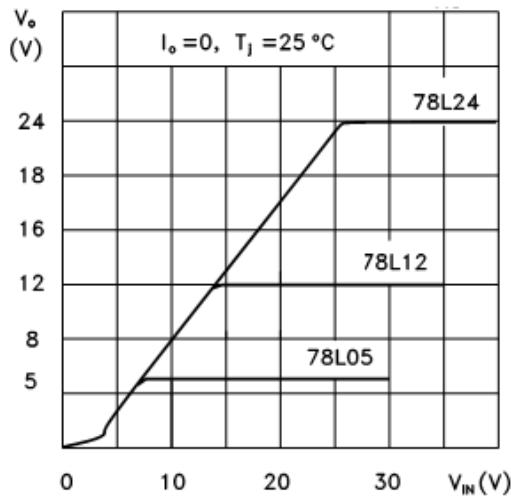


78L05/12/24 Load Characteristics

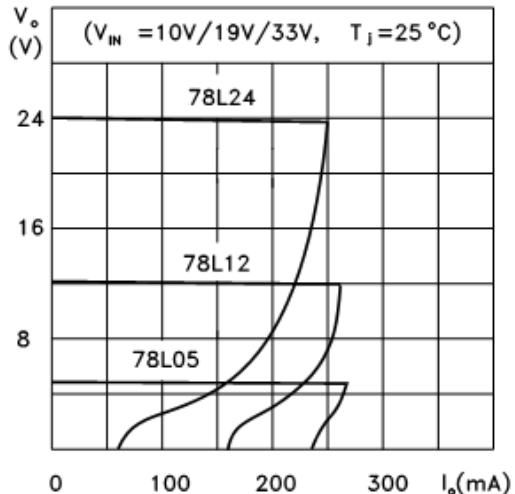



78L05/12/24 Thermal Shutdown

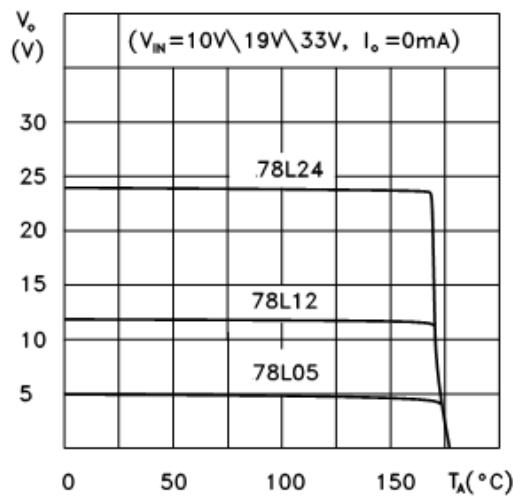


78L00 Series Short Circuit Output Current

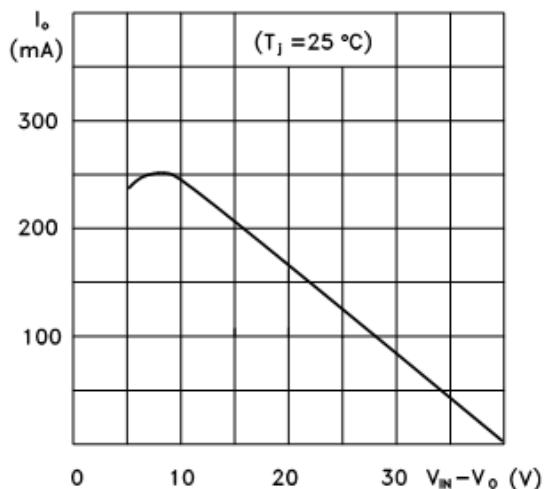

78L05 Quiescent Current vs Input Voltage

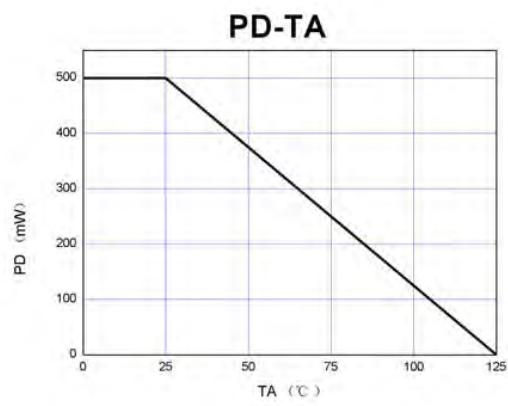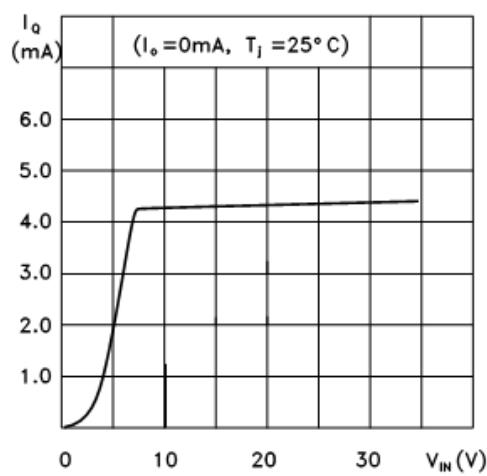

## TO-92 PACKAGE OUTLINE DIMENSIONS(Unit:mm)

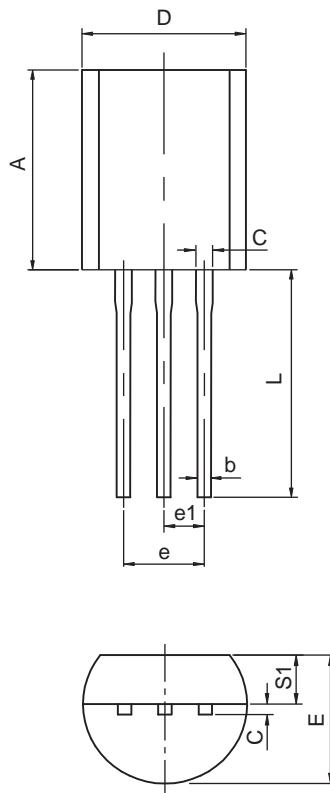

TO-92		
Dim	Min	Max
A	4.45	4.70
C	0.36	0.51
D	4.44	4.70
E	3.30	3.81
L	12.70	-
b	0.36	0.51
b1	0.36	0.76
e	2.42	2.66
e1	1.15	1.39
S1	1.02	-