

**Silicon NPN Power Transistors**

**MJE4340/4341/4342/4343**

**DESCRIPTION**

- With TO-3PN package
- Respectively complement to type MJE4350/4351/4352/4353
- DC current gain  $h_{FE}=8(\text{Min})@I_C=16\text{A}$

**APPLICATIONS**

- For use in high power audio amplifier and switching regulator circuits

**PINNING**

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

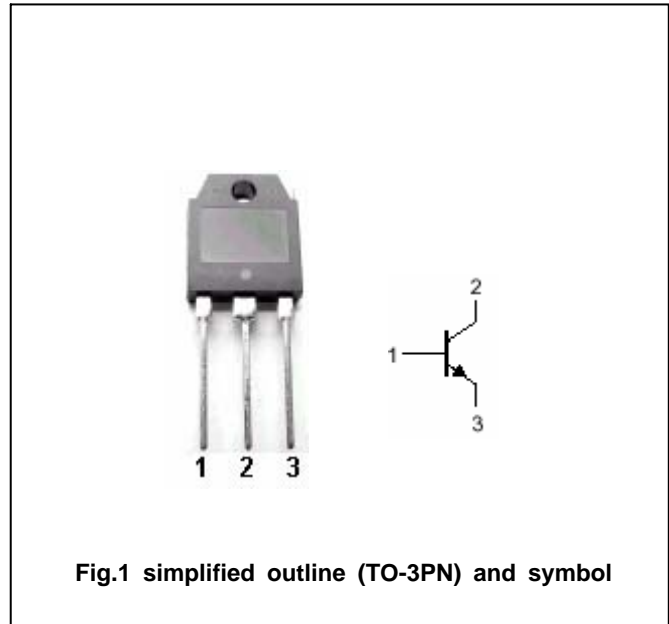


Fig.1 simplified outline (TO-3PN) and symbol

**Absolute maximum ratings(Ta= )**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CB0</sub>	Collector-base voltage	MJE4340	100	V
		MJE4341	120	
		MJE4342	140	
		MJE4343	160	
V <sub>CEO</sub>	Collector-emitter voltage	MJE4340	100	V
		MJE4341	120	
		MJE4342	140	
		MJE4343	160	
V <sub>EBO</sub>	Emitter-base voltage	Open collector	7	V
I <sub>C</sub>	Collector current		16	A
I <sub>CM</sub>	Collector current-peak		20	A
I <sub>B</sub>	Base current		5	A
P <sub>C</sub>	Collector power dissipation	T <sub>C</sub> =25	125	W
T <sub>j</sub>	Junction temperature		150	
T <sub>stg</sub>	Storage temperature		-65~150	

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
R <sub>th j-c</sub>	Thermal resistance junction to case	1.0	/W

## Silicon NPN Power Transistors

## MJE4340/4341/4342/4343

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT	
V <sub>CEO(SUS)</sub>	Collector-emitter sustaining voltage	MJE4340	100			V	
		MJE4341	120				
		MJE4342	140				
		MJE4343	160				
V <sub>CEsat-1</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =8A ; I <sub>B</sub> =0.8A			2.0	V	
V <sub>CEsat-2</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =16A ; I <sub>B</sub> =2.0A			3.5	V	
V <sub>BEsat</sub>	Base-emitter saturation voltage	I <sub>C</sub> =16A ; I <sub>B</sub> =2.0A			3.9	V	
V <sub>BE</sub>	Base-emitter on voltage	I <sub>C</sub> =16A ; V <sub>CE</sub> =4V			3.9	V	
I <sub>CEO</sub>	Collector cut-off current	MJE4340	V <sub>CE</sub> =50V ; I <sub>B</sub> =0			0.75	mA
		MJE4341	V <sub>CE</sub> =60V ; I <sub>B</sub> =0				
		MJE4342	V <sub>CE</sub> =70V ; I <sub>B</sub> =0				
		MJE4343	V <sub>CE</sub> =80V ; I <sub>B</sub> =0				
I <sub>CEX</sub>	Collector cut-off current	V <sub>CE</sub> =RatedV <sub>CBO</sub> ; V <sub>BE</sub> =1.5V T <sub>C</sub> =150			1.0 5.0	mA	
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =RatedV <sub>CB</sub> ; I <sub>E</sub> =0			0.75	mA	
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =7V ; I <sub>C</sub> =0			1.0	mA	
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =8A ; V <sub>CE</sub> =2V	15				
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =16A ; V <sub>CE</sub> =4V	8				
C <sub>OB</sub>	Output capacitance	I <sub>E</sub> =0 ; V <sub>CB</sub> =10V ; f=0.1MHz			800	pF	
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =-1A ; V <sub>CE</sub> =20V ; f=0.5MHz	1.0			MHz	

Silicon NPN Power Transistors

MJE4340/4341/4342/4343

PACKAGE OUTLINE

