

isc Silicon NPN Power Transistor

MJ13335

DESCRIPTION

- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = 500V$ (Min)
- High Switching Speed

APPLICATIONS


- Designed for high-voltage ,high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated switchmode applications.
- Switching regulators
- Inverters
- Solenoid and relay drivers
- Motor controls
- Deflection circuits

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CEV}	Collector-Emitter Voltage	800	V
V_{CEO}	Collector-Emitter Voltage	500	V
V_{EBO}	Emitter-Base Voltage	6	V
I_c	Collector Current-Continuous	20	A
I_{CM}	Collector Current-Peak	30	A
I_B	Base Current-Continuous	10	A
I_{BM}	Base Current-Peak	15	A
P_c	Collector Power Dissipation@ $T_c=25^\circ C$	175	W
T_J	Junction Temperature	200	$^\circ C$
T_{stg}	Storage Temperature	-65~200	$^\circ C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th,j-c}$	Thermal Resistance,Junction to Case	1.0	$^\circ C/W$

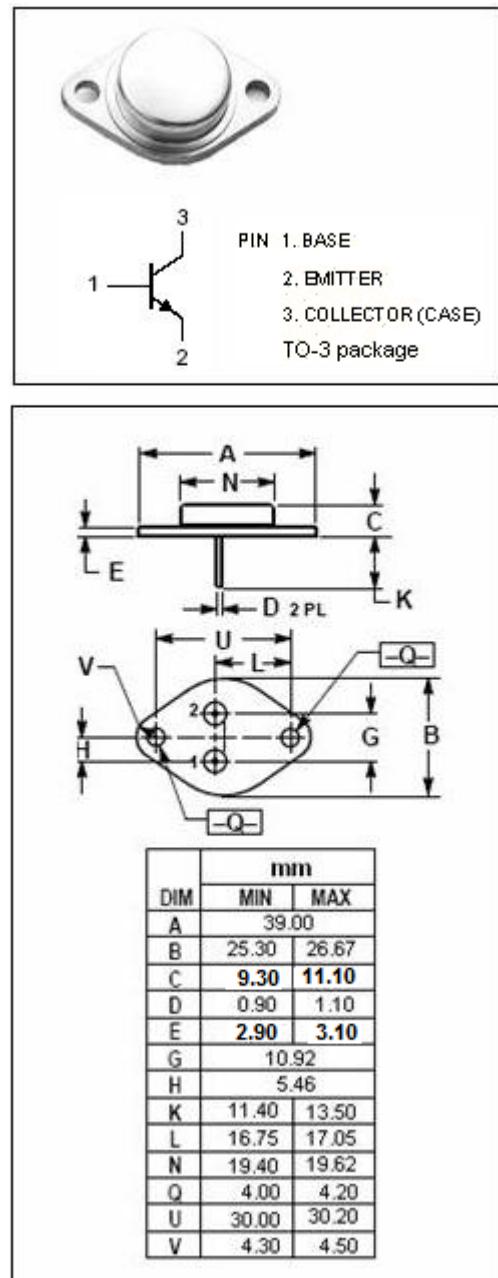

isc Silicon NPN Power Transistor

MJ13335

ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ C$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=100mA ; I_B=0$	500			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C= 10A; I_B=2A$ $I_C= 10A; I_B=2A, T_C=100^\circ C$			1.8 2.4	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C= 20A; I_B=6.7A$			5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C= 10A; I_B= 2A$ $I_C= 10A; I_B= 2A, T_C=100^\circ C$			1.8 1.8	V
I_{CEV}	Collector Cutoff Current	$V_{CEV}=500V; V_{BE(off)}=1.5V$ $V_{CEV}=500V; V_{BE(off)}=1.5V; T_C=150^\circ C$			0.25 5.0	mA
I_{CER}	Collector Cutoff Current	$V_{CE}= 500V; R_{BE}= 50 \Omega, T_C= 100^\circ C$			5.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}= 6V; I_C=0$			1	mA
h_{FE}	DC Current Gain	$I_C= 5A ; V_{CE}= 5V$	10		60	
f_T	Current Gain-Bandwidth Product	$I_C= 0.3A ; V_{CE}= 10V; f_{test}=1MHz$	5		40	MHz
C_{OB}	Output Capacitance	$I_E= 0; V_{CB}= 10V; f_{test}=1kHz$	125		500	pF

Switching times; Resistive Load

t_d	Delay Time	$I_C= 10A , V_{CC}= 250V; I_{B1}=2A$ $V_{BE(off)}= 5V; t_p= 10 \mu s;$ Duty Cycle $\leq 2.0\%$		0.02	0.1	μs
t_r	Rise Time			0.3	0.7	μs
t_s	Storage Time			1.6	4.0	μs
t_f	Fall Time			0.3	0.7	μs