

CMXDM7002A
SURFACE MOUNT
DUAL N-CHANNEL
ENHANCEMENT-MODE
SILICON MOSFETS



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMXDM7002A is special dual version of the 2N7002 Enhancement-mode N-Channel Field Effect Transistor, manufactured by the N-Channel DMOS Process, and designed for high speed pulsed amplifier and driver applications. This special Dual Transistor device offers low $r_{DS(ON)}$ and low $V_{DS(ON)}$.

SUPERmini™



SOT-26 CASE

MAXIMUM RATINGS: ($T_A=25^\circ C$)

Drain-Source Voltage	V_{DS}	60	V
Drain-Gate Voltage	V_{DG}	60	V
Gate-Source Voltage	V_{GS}	40	V
Continuous Drain Current	I_D	280	mA
Continuous Source Current (Body Diode)	I_S	280	mA
Maximum Pulsed Drain Current	I_{DM}	1.5	A
Maximum Pulsed Source Current	I_{SM}	1.5	A
Power Dissipation	P_D	350	mW
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +150	°C
Thermal Resistance	Θ_{JA}	357	°C/W

SYMBOL		UNITS
V_{DS}	60	V
V_{DG}	60	V
V_{GS}	40	V
I_D	280	mA
I_S	280	mA
I_{DM}	1.5	A
I_{SM}	1.5	A
P_D	350	mW
T_J, T_{stg}	-65 to +150	°C
Θ_{JA}	357	°C/W

ELECTRICAL CHARACTERISTICS PER TRANSISTOR: ($T_A=25^\circ C$ unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{GSSF}, I_{GSSR}	$V_{GS}=20V, V_{DS}=0$		100	nA
I_{DSS}	$V_{DS}=60V, V_{GS}=0$		1.0	µA
I_{DSS}	$V_{DS}=60V, V_{GS}=0, T_J=125^\circ C$		500	µA
$I_{D(ON)}$	$V_{GS}=10V, V_{DS}=10V$	500		mA
BV_{DSS}	$V_{GS}=0, I_D=10\mu A$	60		V
$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1.0	2.5	V
$V_{DS(ON)}$	$V_{GS}=10V, I_D=500mA$		1.0	V
$V_{DS(ON)}$	$V_{GS}=5.0V, I_D=50mA$		0.15	V
V_{SD}	$V_{GS}=0, I_S=400mA$		1.2	V
$r_{DS(ON)}$	$V_{GS}=10V, I_D=500mA$		2.0	Ω
$r_{DS(ON)}$	$V_{GS}=10V, I_D=500mA, T_J=125^\circ C$		3.5	Ω
$r_{DS(ON)}$	$V_{GS}=5.0V, I_D=50mA$		3.0	Ω
$r_{DS(ON)}$	$V_{GS}=5.0V, I_D=50mA, T_J=125^\circ C$		5.0	Ω
g_{FS}	$V_{DS}=10V, I_D=200mA$	80		mS
C_{rss}	$V_{DS}=25V, V_{GS}=0, f=1.0MHz$		5.0	pF
C_{iss}	$V_{DS}=25V, V_{GS}=0, f=1.0MHz$		50	pF
C_{oss}	$V_{DS}=25V, V_{GS}=0, f=1.0MHz$		25	pF
t_{on}, t_{off}	$V_{DD}=30V, V_{GS}=10V, I_D=200mA, R_G=25\Omega, R_L=150\Omega$		20	ns

CMXDM7002A


SURFACE MOUNT
DUAL N-CHANNEL
ENHANCEMENT-MODE
SILICON MOSFETS



SOT-26 CASE - MECHANICAL OUTLINE

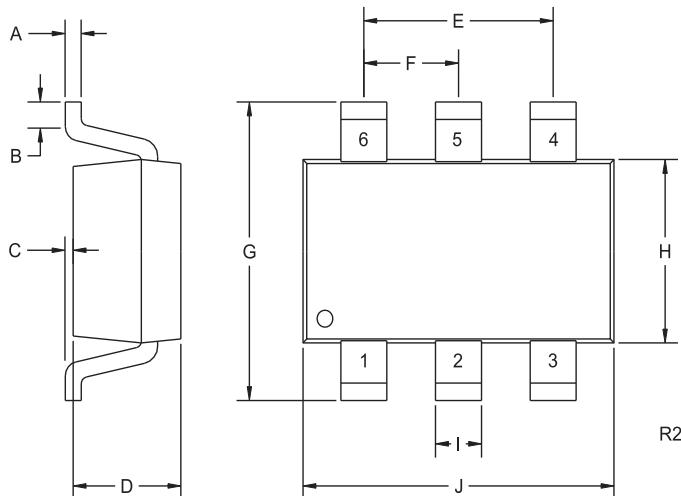

PIN CONFIGURATION

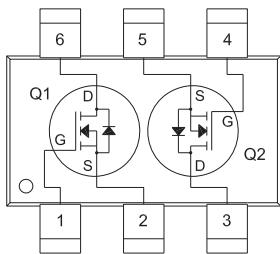

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.007	0.11	0.19
B	0.016	-	0.40	-
C	-	0.004	-	0.10
D	0.039	0.047	1.00	1.20
E	0.074	0.075	1.88	1.92
F	0.037	0.038	0.93	0.97
G	0.102	0.118	2.60	3.00
H	0.059	0.067	1.50	1.70
I	0.016		0.41	
J	0.110	0.118	2.80	3.00

SOT-26 (REV: R2)

LEAD CODE:

- 1) Gate Q1
- 2) Source Q1
- 3) Drain Q2
- 4) Gate Q2
- 5) Source Q2
- 6) Drain Q1

MARKING CODE: X02A

R2 (12-February 2010)