

DIODE(THREE PHASES BRIDGE TYPE)


DF60LA/LB80/160

Power Diode Module DF60LA/LB is designed for three phase full wave rectification, which has six diodes connected in a three phase bridge configuration. The mounting base of the module is electrically isolated from semiconductor elements for simple heatsink construction output DC current is 60Amp (Tc=111°C) Repetitive peak reverse voltage is up to 1600V.

- TjMAX=150°C
- Isolated Mounting Base

(Applications)

AC. DC Motor Drive/AVR/Switching
—for three phase rectification

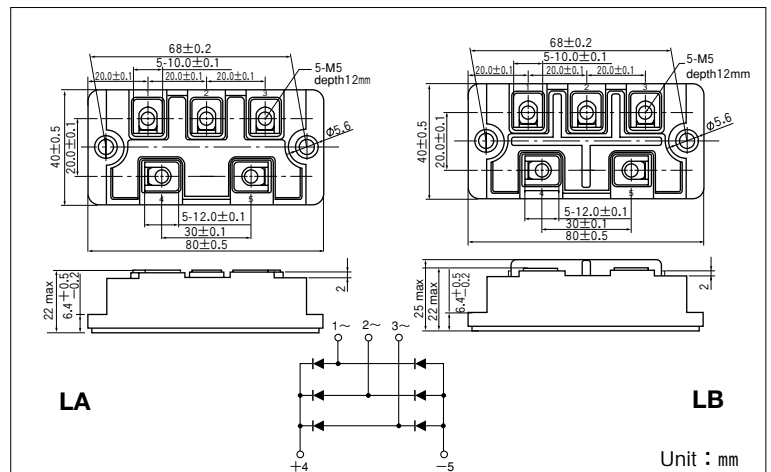

Maximum Ratings

(Tj=25°C unless otherwise specified)

Symbol	Item	Ratings		unit
		DF60LA/LB80	DF60LA/LB160	
VRRM	Repetitive Peak Reverse Voltage	800	1600	V
VRSM	Non-Repetitive Peak Reverse Voltage	960	1700	V

Symbol	Item	Conditions	Ratings	unit	
Id	Output Current (D.C.)	Three phase full wave, Tc=111°C	60	A	
IfSM	Surge Forward Current	1/2 cycle, 50/60Hz, Peak value, non-repetitive	730/800	A	
Tj	Operating Junction Temperature		-40 to +150	°C	
Tstg	Storage Temperature		-40 to +125	°C	
Viso	Isolation Breakdown Voltage (R.M.S.)	A.C. 1minute	2500	V	
	Mounting torque	Mounting (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	N·m (kgf·cm)
		Terminal (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	
	Mass	Typical Value	100	g	

Electrical Characteristics

Symbol	Item	Conditions	Ratings	unit
IRRM	Repetitive Peak Reverse Current, max.	Tj=150°C, VR=VRRM	8	mA
VFM	Forward Voltage Drop, max.	If=60A, Inst. measurement	1.30	V
Rth(j-c)	Thermal Impedance, max.	Junction to case	0.25	°C/W

