


RF Transformer



Configuration Type:

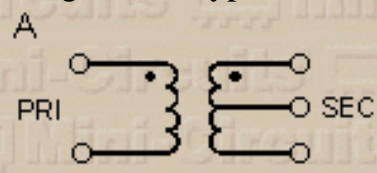

T2.5-6T


Ω RATIO	Frequency MHz	Insertion Loss			Case Style	Conn- ection
		3 dB MHz	2 dB MHz	1 dB MHz		
2.50	0.01-100	0.01- 100	0.02- 50	0.50- 20	W38	ev

Pin Connections

Port	Primary Dot	Primary	Primary CT	Second- ary Dot	Second- ary	Second- ary CT	Gnd Ext.	Case Gnd	Not Used
ev	4	6	-	3	1	2	-	-	5

Notes:

- FOR A AND B CONFIGURATIONS:
Typical Amplitude Unbalance: 0.1 dB over 1 dB frequency range; 0.5 dB over entire frequency range.
Typical Phase Unbalance: 1.0° over 1 dB frequency range; 5.0° over entire frequency range.
- Absolute power, voltage and current ratings:
RF input power: 0.25 Watt rating
DC current, 30mA.
- Operating temperature range is -20°C to +85°C.
- Impedance ratio = secondary/primary
- Two case styles available: Plug-in case style X65; Radial lead case style W38.
- Insertion loss referenced to mid-band loss
- General Quality Control Procedures and Environmental Specifications are given in [Mini-Circuits Guarantees Quality](#).
Hi-Rel, MIL description are given in [Hi-Rel and MIL](#)
- Prices and Specifications subjects to change without notice.

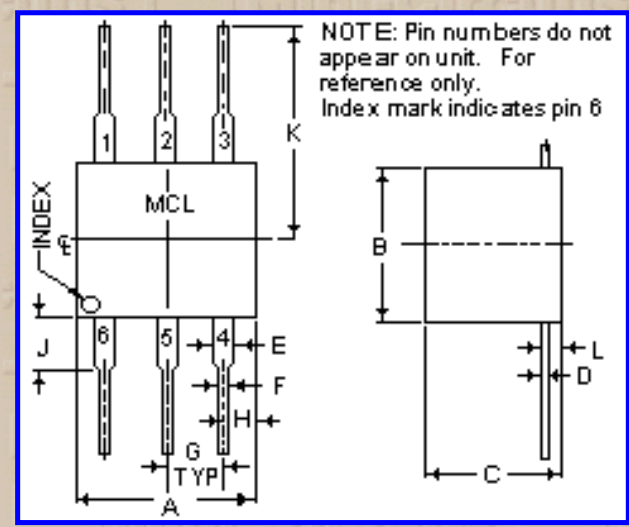

Case Style - W38 (inch,mm) weight: 0.5 grams.

A	B	C	D	E	F	G	H	J
.30	.27	.23	.010	.042	.020	.100	.05	.09
7.620	6.858	5.842	0.254	1.067	0.508	2.540	1.270	2.286
K	L	M	N	P	Q	R	S	T
.31	.036							
7.874	0.914							

Tolerance: .x ± .1 .xx ± .03 .xxx ± .015 inch.

Material and Finish:

Case material: plastic. Lead finish: tin-lead plate or tin plate.

Special Tolerances:

Lead width ±.010 inch; lead thickness ±.003 inch.

FREQ. (MHz)	Insertion Loss(dB)	Input Return Loss(dB)
0.010	2.71	1.70
0.020	1.14	4.46
0.050	0.31	10.63
0.099	0.18	16.39
0.500	0.18	26.01
20.000	0.48	10.09
50.000	1.47	4.52
53.667	1.60	4.19
95.264	2.52	2.82
100.000	2.55	2.87



Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE • 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

[Back](#)

i2 Technologies US, Inc.

HTML Pages converted to PDF Document

This document contain component information from the manufacturer's website which are not available in a revision controlled document from the manufacturer. To facilitate the addition of these parts into the Electronics Database, we are converting the HTML pages related to that part, from the manufacturer's website into Adobe PDF format. The contents of this document is based on the information provided on the manufacturer's website, therefore the information may have been changed by the manufacturer since this was created.

