



RF & MICROWAVE TRANSISTORS  
108...152MHz APPLICATIONS

- CLASS C TRANSISTOR
- FREQUENCY 175MHz
- VOLTAGE 28V
- POWER OUT 40W
- POWER GAIN 7.6dB
- EFFICIENCY 60%
- GOLD METALLIZATION
- COMMON EMITTER

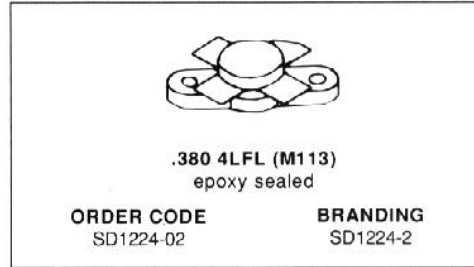

**DESCRIPTION**

The SD1224-2 is an epitaxial silicon NPN planar transistor designed primarily for 12.5V AM Class C RF amplifiers functional in the aviation band 118-136MHz and for 28V FM Class C RF amplifiers utilized in ground station transmitters. It withstands extremely high VSWR under rated conditions.

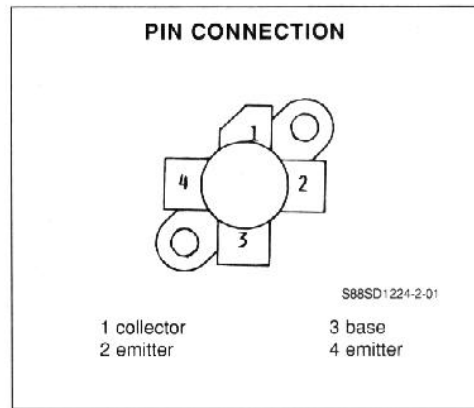

**ABSOLUTE MAXIMUM RATINGS** ( $T_{case} = 25^{\circ}C$ )

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector - Base Voltage	65.0	V
$V_{CEO}$	Collector - Emitter Voltage	35.0	V
$V_{CES}$	Collector - Emitter Voltage	65	V
$V_{EBO}$	Emitter - Base Voltage	4.0	V
$I_C$	Collector Current	5.0	A
$P_{tot}$	Total Power Dissipation	60.0	W
$T_{stg}$	Storage Temperature	- 65 to + 150	$^{\circ}C$
$T_j$	Junction Temperature	+ 200	$^{\circ}C$

**THERMAL DATA**

$R_{th(j-c)}$	Junction-case Thermal Resistance	2.9	$^{\circ}C/W$
---------------	----------------------------------	-----	---------------

**SD1224-2**

**ELECTRICAL CHARACTERISTICS** ( $T_{CRSO} = 25^{\circ}\text{C}$ )

STATIC


Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
$BV_{CES}$	$I_C = 200\text{mA}$	$V_{BE} = 0$	65.0			V
$BV_{CEO}$	$I_C = 200\text{mA}$	$I_B = 0$	35.0			V
$BV_{FBO}$	$I_E = 10\text{mA}$	$I_C = 0$	4.0			V
$I_{CBO}$	$V_{CB} = 30.0\text{V}$	$I_E = 0$			1	mA
$h_{FE}$	$V_{CE} = 5.0\text{V}$	$I_C = 500\text{mA}$	5.0			

DYNAMIC

Symbol	Test Conditions			Value			Unit
				Min.	Typ.	Max.	
$P_O$	$f = 175\text{MHz}$	$V_{CE} = 28.0\text{V}$	40.0				W
$G_P$	$f = 175\text{MHz}$	$V_{CE} = 28.0\text{V}$	7.6				dB
$\eta_C$	$f = 175\text{MHz}$	$V_{CE} = 28\text{V}$	$P_O = 40\text{W}$	60			%
$C_{OB}$	$f = 1\text{MHz}$	$V_{CB} = 30.0\text{V}$	$I_E = 0$			65.0	pF

## PACKAGE MECHANICAL DATA

.380 4FL

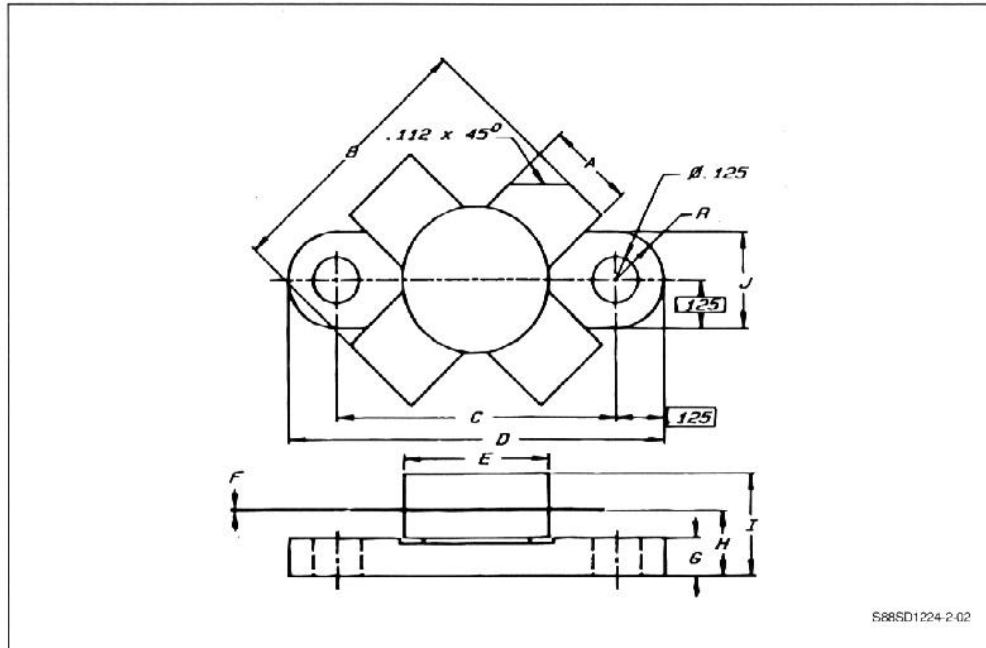

	Minimum Inches/mm	Maximum Inches/mm
A	.220/5.59	.230/5.84
B	.785/19.94	
C	.720/18.29	.730/18.54
D	.970/24.64	.980/24.89
E		.385/9.78
F	.004/0.10	.006/0.15
G	.085/2.16	.105/2.67
H	.160/4.06	.180/4.57
I		.280/7.11
J	.240/6.10	.255/6.48