

CMOS 8-BIT MICROCONTROLLERS

TMP91C640N/TMP91C641N

TMP91C640F/TMP91C641F

1. OUTLINE AND CHARACTERISTICS

The TMP91C640 is a high-speed advanced 8-bit micro controller applicable to a variety of equipment.


With its 8-bit CPU, ROM, RAM, A/D converter, multi-function timer/event counter and general-purpose serial interface integrated into a single CMOS chip, the TMP91C640 allows the expansion of external memories for programs (up to 48K byte) and data (1M byte). The TMP91C641 is the same as the TMP91C640 but without the ROM.

The TMP91C640N/641N is a 64-pin shrink DIP product. (SDIP64-P-750)

The TMP91C640F/641F is a 64-pin flat package product. (QFP64-P-1420A)

The characteristics of the TMP91C640 include:

- (1) Powerful instructions
163 basic instructions, including
Multiplication, division, 16-bit arithmetic operations, bit manipulation instructions
- (2) Minimum instruction executing time: 320 ns (at 12.5 MHz oscillation frequency)
- (3) Internal ROM: 16K byte (The TMP91C641 does not have a built-in ROM.)
- (4) Internal RAM: 512 byte
- (5) Memory expansion
Program memory: 64K byte
Data memory: 1M byte
- (6) 8-bit A/D converter (6 channels)
- (7) General-purpose serial interface (1 channel)
Asynchronous mode, I/O interface mode
- (8) Multi-function 16-bit timer/event counter (1 channel)
- (9) 8-bit timers (4 channels)
- (10) Stepping motor control port (2 channels)
- (11) Input/Output ports (54 pins)
- (12) Interrupt function: 10 internal interrupts and 4 external interrupts
- (13) Micro Direct Memory Access (μ DMA) function (11 channels)
- (14) Watchdog timer
- (15) Standby function (4 HALT modes)

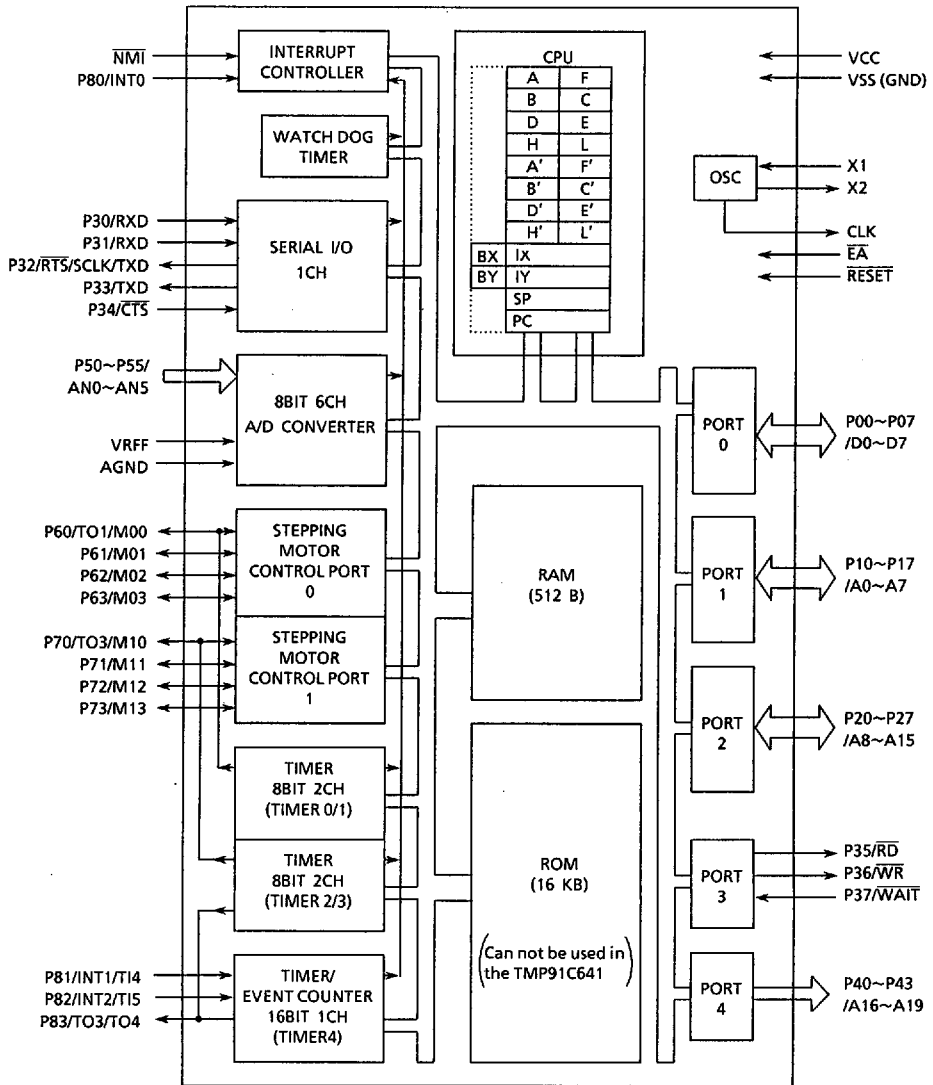

301190


Figure 1 TMP91C640 Block Diagram

2. PIN ASSIGNMENT AND FUNCTIONS

The assignment of input/output pins, their names and functions are described below.

2.1 Pin Assignment


Figure 2.1-(1) shows pin assignment of the TMP91C640N/641N.

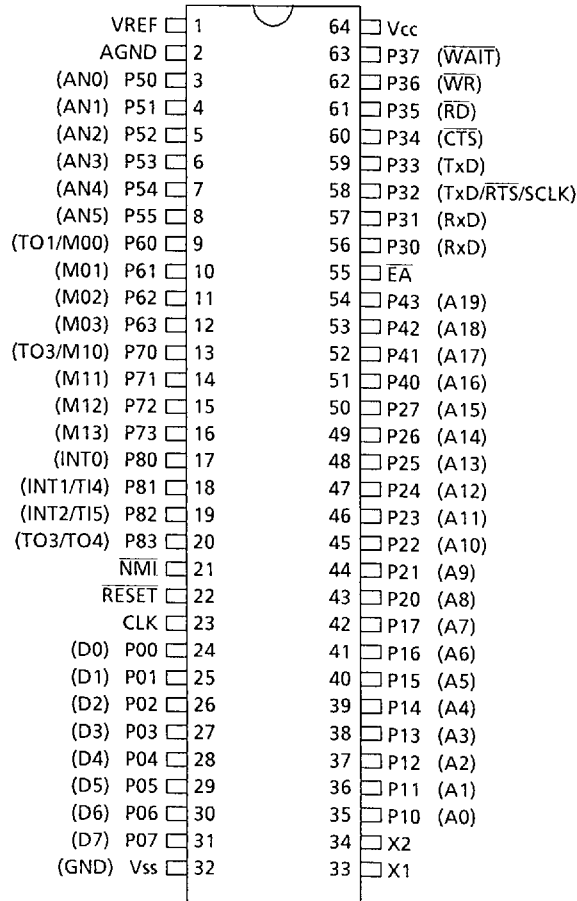

200689

Figure 2.1- (1) Pin Assignment (Shrink Dual Inline Package)

Figure 2.1-(2) shows pin assignment of the TMP91C640F/641F.

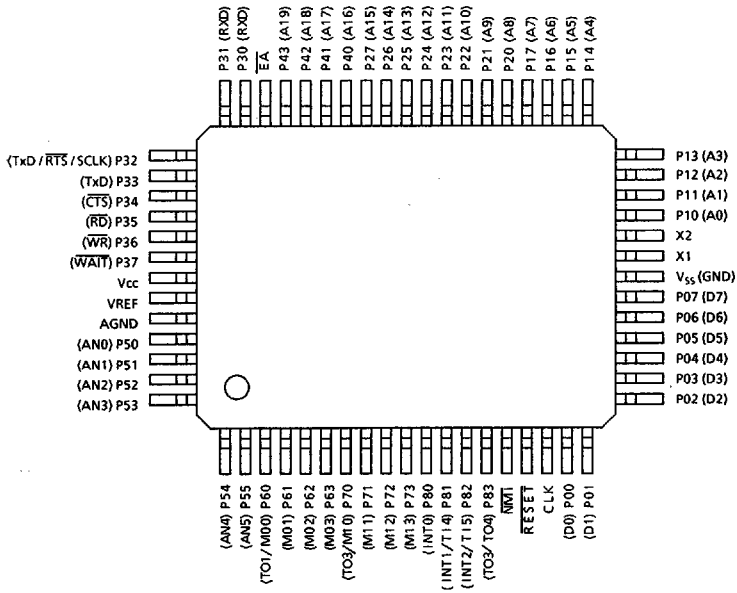

200689

Figure 2.1- (2) Pin Assignment (Flat Package)

2.2 Pin Names and Functions

The names of input/output pins and their functions are summarized in Table 2.2.

Table 2.2 Pin Names and Functions (1/2)

Pin Name	No. of pins	I/O 3 states	Function
P00~P07 /D0~D7	8	I/O	Port 0: 8-bit I/O port that allows selection of input/output on byte basis
		3 states	Data bus: Also functions as 8-bit bidirectional data bus for external memory
P10~P17 /A0~A7	8	I/O	Port 1: 8-bit I/O port that allows selection on byte basis
		Output	Address bus: The lower 8 bits address bus for external memory
P20~P27 /A8~A15	8	I/O	Port 2: 8-bit I/O port that allows selection on bit basis
		Output	Address bus: The upper 8 bits address bus for external memory
P30 /RxD	1	Input	Port 30: 1-bit input port Receiver Serial Data
P31 /RxD	1	Input	Port 31: 1-bit input port Receiver Serial Data
P32 /TxD /RTS /SCLK	1	Output	Port 32: 1-bit output port Transmitter serial Data Request to send serial data Serial clock output
P33 /TxD	1	Output	Port 33: 1-bit output port Transmitter Serial Data
P34 /CTS	1	Input	Port 34: 1-bit input port Clear to send Serial data
P35 /RD	1	Output	Port 35: 1-bit output port Read: Generates strobe signal for reading external memory
P36 /WR	1	Output	Port 36: 1-bit output port Write: Generates strobe signal for writing into external memory
P37 /WAIT	1	Input	Port 37: 1-bit input port Wait: Input pin for connecting slow speed memory or peripheral LSI
P40~P43 /A16~A19	4	Output	Port 4: 4-bit output port that allows selection of Port/Address Bus on bit basis
			Address bus: Also functions as address bus for external memory (4 bits of bank address)
P50~P55 /AN0~AN5	6	Input	Port 5: 6-bit input port
			Analog input: 6 analog inputs to A/D converter
VREF	1		Input of reference voltage to A/D converter

200689

Table 2.2 Pin Names and Functions (2/2)

Pin Name	No. of pins	I/O 3 states	Function
AGND	1		Ground pin for A/D converter
P60~P63 /M00~M03 /TO1	4	I/O	Port 6: 4-bit I/O port that allows I/O selection on bit basis
		Output	Stepping motor control port 0
		Output	Timer output 1: Output of Timer 0 or 1
P70~P73 /M10~M13 /TO3	4	I/O	Port 7: 4-bit I/O port that allows I/O selection on bit basis
		Output	Stepping motor control port 1
		Output	Timer output 3: Output of Timer 2 or 3
P80 /INT0	1	Input	Port 80: 1-bit input port
			Interrupt request pin 0: interrupt request pin (Level/rising edge is programmable)
P81 /INT1 /TI4	1	Input	Port 81: 1-bit input port
			Interrupt request pin 1: interrupt request pin (Rising/falling edge is programmable)
			Timer input 4: Counter/capture trigger signal for Timer 4
P82 /INT2 /TI5	1	Input	Port 82: 1-bit input port
			Interrupt request pin 2: rising edge interrupt request pin
			Timer input 5: capture trigger signal for Timer 4
P83 /TO3 /TO4	1	Output	Port 83: 1-bit output port
			Timer output 3/4: Output of Timer 2, 3 or 4
NMI	1	Input	Non-maskable interrupt request pin: Falling edge interrupt request pin
CLK	1	Output	Clock output: Generates clock pulse at 1/4 frequency of clock oscillation. It is Pulled up internally during resetting.
EA	1	Input	External access: Connects with Vcc pin in the TMP91C640 using internal ROM, and with GND pin in the TMP91C641 with no internal ROM.
RESET	1	Input	Reset : Initializes the TMP91C640/641. (Built-in pull-up resistor)
X1/X2	2	Input/ Output	Pin for quartz crystal or ceramic resonator
Vcc	1		Power supply (+5V)
Vss (GND)	1		Ground (0V)

200689

3. OPERATION

The following explains the TMP91C640 functions and basic operations. The CPU functions and internal I/O functions of the TMP91C640 are the same as the TMP90C840A.

Refer to the "TMP90C840A" section concerning functions which are not explained the following.

3.1 CPU

The TMP91C640 has a internal high-performance 8-bit CPU.

Refer to the "TLCS-90 CPU" section concerning CPU operation.

3.2 Memory Map

The TMP91C640 supports a program memory of up to 64K bytes and a data memory of maximum 1M bytes.

The program memory may be assigned to the address space from 00000H to 0FFFFH, while the data memory can be allocated to any address from 00000H to FFFFFH.

(1) Internal ROM

The TMP91C640 internally contains an 16K-byte ROM. The address space from 0000H to 3FFFH is provided to the ROM. The CPU starts executing a program from 0000H by resetting.

The addresses 0010H to 007FH in this internal ROM area are used for the entry area for the interrupt processing.

The TMP91C641 does not have a built-in ROM; therefore, the address space 0000H ~3FFFH is used as external memory space.

(2) Internal RAM


The TMP91C640 also contains a 512 byte RAM, which is allocated to the address space from FDC0H to FFBFH. The CPU allows the access to a certain RAM area (FF00H to FFBFH, 192 bytes) by a short operation code (opcode) in a "direct addressing mode".

The addresses from FF10H to FF7FH in this RAM area can be used as parameter area for micro DMA processing (and for any other purposes when the micro DMA function is not used).

(3) Internal I/O

The TMP91C640 provides a 48-byte address space as an internal I/O area, whose addresses range from FFC0H to FFEFH. This I/O area can be accessed by the CPU using a short opcode in the "direct addressing mode".

Figure 3.1 (1) is a memory map indicating the areas accessible by the CPU in the respective addressing mode.

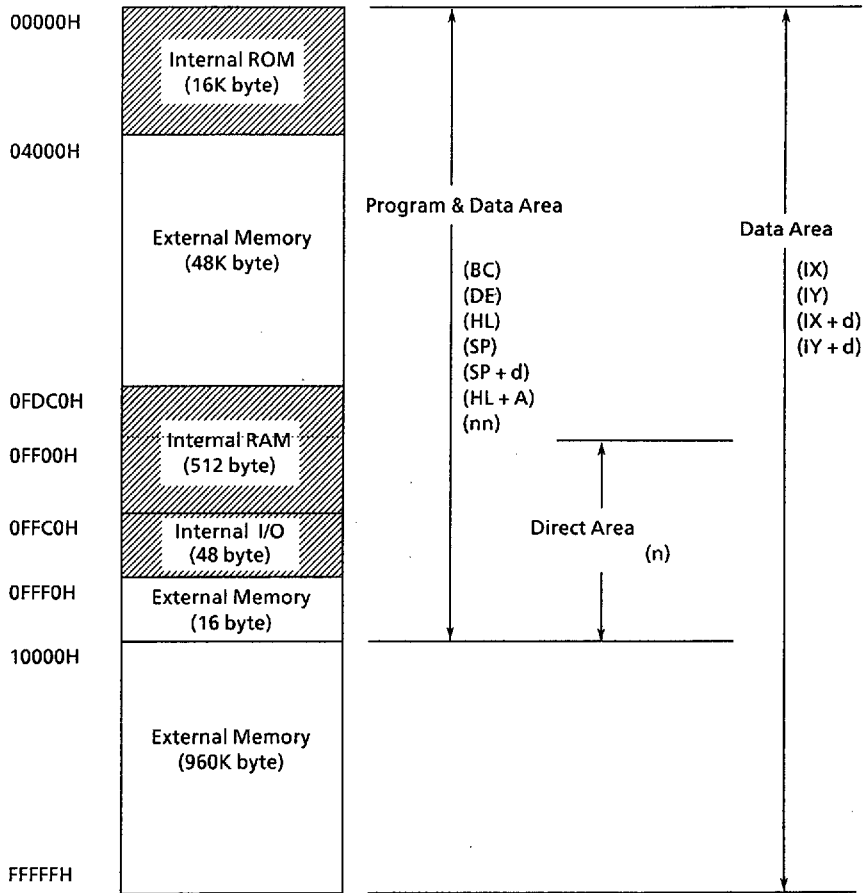

270989

Figure 3.1 (1) Memory Map

4. ELECTRICAL CHARACTERISTICS

TMP91C640N/TMP91C640F/TMP91C641N/TMP91C641F

4.1 Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
V _{CC}	Supply voltage	-0.5~+7	V
V _{IN}	Input voltage	-0.5~V _{CC} +0.5	V
P _D	Power dissipation (T _a = 85°C)	F 500	mW
		N 600	
T _{SOLDER}	Soldering temperature (10 s)	260	°C
T _{STG}	Storage temperature	-65 ~ 150	°C
T _{OPR}	Operating temperature	-40 ~ 85	°C

210689

4.2 DC Characteristics

V_{CC} = 5V ± 10% TA = -40~85°C (1~10MHz)
 TA = -20~70°C (10~12.5MHz)
 Typical Values are for TA = 25°C V_{CC} = 5V.

Symbol	Parameter	Min	Max	Unit	Test Conditions
V _{IL}	Input Low Voltage (P0)	-0.3	0.2V _{CC} -0.1	V	
V _{IL1}	P1, P2, P3, P4, P5, P6, P7, P8	-0.3	0.3V _{CC}	V	
V _{IL2}	RESET, INTO (P80), NMI	-0.3	0.25V _{CC}	V	
V _{IL3}	EA	-0.3	0.3	V	
V _{IL4}	X1	-0.3	0.2V _{CC}	V	
V _{IH}	Input High Voltage (P0)	0.2V _{CC} +1.1	V _{CC} +0.3	V	
V _{IH1}	P1, P2, P3, P4, P5, P6, P7, P8	0.7V _{CC}	V _{CC} +0.3	V	
V _{IH2}	RESET, INTO (P80), NMI	0.75V _{CC}	V _{CC} +0.3	V	
V _{IH3}	EA	V _{CC} -0.3	V _{CC} +0.3	V	
V _{IH4}	X1	0.8V _{CC}	V _{CC} +0.3	V	
V _{OL}	Output Low Voltage		0.45	V	I _{OL} = 1.6mA
V _{OH} V _{OH1} V _{OH2}	Output High Voltage	2.4 0.75V _{CC} 0.9V _{CC}		V V V	I _{OH} = -400µA I _{OH} = -100µA I _{OH} = -20µA
I _{DAR}	Darlington Drive Current (8 I/O pins) (Note)	-1.0	-3.5	mA	V _{EXT} = 1.5V R _{EXT} = 1.1 kΩ
I _{LI}	Input Leakage Current	0.02 (Typ)	± 5	µA	0.0 ≤ V _{in} ≤ V _{CC}
I _{LO}	Output Leakage Current	0.05 (Typ)	± 10	µA	0.2 ≤ V _{in} ≤ V _{CC} - 0.2
I _{CC}	Operating Current (RUN)	20 (Typ)	40	mA	t _{osc} = 10MHz (25%Up @12.5MHz)
	idle 1	1.5 (Typ)	5	mA	
	idle 2	9 (Typ)	15	mA	
	STOP (TA = -40~85°C) STOP (TA = 0~50°C)	0.2 (Typ)	50 10	µA µA	0.2 ≤ V _{in} ≤ V _{CC} - 0.2
V _{STOP}	Power Down Voltage (@STOP)	2 RAM BACK UP	6	V	V _{IL2} = 0.2V _{CC} , V _{IH2} = 0.8V _{CC}
R _{RST}	RESET Pull Up Resistor	50	150	kΩ	
C _{IO}	Pin Capacitance		10	pF	testfreq = 1MHz
V _{TH}	Schmitt width RESET, NMI, INTO	0.4	1.0 (Typ)	V	

Note : I_{DAR} is guaranteed for a total of up to 8 optional ports.

040789

4.3 AC Characteristics

$V_{CC} = 5V \pm 10\%$ $T_A = -40 \sim 85^\circ C$ (1~10MHz)
 $CL = 50pF$ $T_A = -20 \sim 70^\circ C$ (10~12.5MHz)

Symbol	Parameter	Variable		10MHz Clock		12.5MHz Clock		Unit
		Min	Max	Min	Max	Min	Max	
t _{Osc}	OSC. Period = x	80	1000	100		80		ns
t _{CYC}	CLK Period	4x	4x	400		320		ns
t _{WL}	CLK Low width	2x - 40		160		120		ns
t _{WH}	CLK High width	2x - 40		160		120		ns
t _{AC}	Address Setup to \overline{RD} , \overline{WR}	x - 45		55		35		ns
t _{RR}	\overline{RD} Low width	2.5x - 40		210		160		ns
t _{CA}	Address Hold Time After \overline{RD} , \overline{WR}	0.5x - 30		20		10		ns
t _{AD}	Address to Valid Data In		3.5x - 95		255		185	ns
t _{RD}	\overline{RD} to Valid Data In		2.5x - 80		170		120	ns
t _{HR}	Input Data Hold After \overline{RD}	0		0		0		ns
t _{WW}	\overline{WR} Low width	2.5x - 40		210		160		ns
t _{DW}	Data Setup to \overline{WR}	2x - 50		150		110		ns
t _{WD}	Data Hold After \overline{WR}	30	90	30	90	30	90	ns
t _{CWA}	\overline{RD} , \overline{WR} to Valid \overline{WAIT}		1.5x - 100		50		20	ns
t _{AWA}	Address to Valid \overline{WAIT}		2.5x - 130		120		70	ns
t _{WAS}	\overline{WAIT} Setup to CLK	70		70		70		ns
t _{WAH}	\overline{WAIT} Hold After CLK	0		0		0		ns
t _{RV}	\overline{RD} , \overline{WR} Recovery Time	1.5x - 35		115		85		ns
t _{CPW}	CLK to Port Data Output		x + 200		300		280	ns
t _{PRC}	Port Data Setup to CLK	200		200		200		ns
t _{CPR}	Port Data Hold After CLK	100		100		100		ns
t _{CHCL}	\overline{RD} / \overline{WR} Hold After CLK	x - 60		40		20		ns
t _{CLC}	\overline{RD} / \overline{WR} Setup to CLK	1.5x - 50		100		70		ns
t _{CLHA}	Address Hold After CLK	1.5x - 80		70		40		ns
t _{ACL}	Address Setup to CLK	2.5x - 80		170		120		ns
t _{CLD}	Data Setup to CLK	x - 50		50		30		ns

210689

- AC output level High 2.2V/Low 0.8V
- AC input level High 2.4V/Low 0.45V (D0 - D7)
High 0.8V_{CC}/Low 0.2V_{CC} (excluding D0 - D7)

4.4 A/D Conversion Characteristics

V_{CC} = 5V ± 10% TA = -40~85°C (1~10MHz)
 TA = -20~70°C (10~12.5MHz)

Symbol	Parameter	Min	Typ	Max	Unit
V _{REF}	Analog reference voltage	V _{CC} - 1.5	V _{CC}	V _{CC}	V
AGND	Analog reference voltage	V _{SS}	V _{SS}	V _{SS}	
V _{AIN}	Allowable analog input voltage	V _{SS}		V _{CC}	
I _{REF}	Supply current for analog reference voltage		0.5	1.0	mA
Error	Total error (TA = 25°C, V _{CC} = V _{REF} = 5.0V)		1.0		LSB
	Total error			2.5	

210689

4.5 Zero-Cross Characteristics

V_{CC} = 5V ± 10% TA = -40~85°C (1~10MHz)
 TA = -20~70°C (10~12.5MHz)

Symbol	Parameter	Condition	Min	Max	Unit
V _{ZX}	Zero-cross detection input	AC coupling C = 0.1μF	1	1.8	V _{AC} p-p
A _{ZX}	Zero-cross accuracy	50/60Hz sine wave		135	mV
F _{ZX}	Zero-cross detection input frequency		0.04	1	kHz

210689

4.6 Serial Channel Timing – I/O Interface Mode

V_{CC} = 5V ± 10% TA = -40~85°C (1~10MHz)
 CL = 50pF TA = -20~70°C (10~12.5MHz)

Symbol	Parameter	Variable		10MHz Clock		12.5MHz Clock		Units
		Min	Max	Min	Max	Min	Max	
t _{SCY}	Serial Port Clock Cycle Time	8x		800		640		ns
t _{OSS}	Output Data Setup SCLK Rising Edge	6x - 150		450		330		ns
t _{OHS}	Output Data Hold After SCLK Rising Edge	2x - 120		80		40		ns
t _{HSR}	Input Data Hold After SCLK Rising Edge	0		0		0		ns
t _{SRD}	SCLK Rising Edge to Input DATA Valid		6x - 150		450		330	ns

210689

4.7 16-bit Event Counter





V_{CC} = 5V ± 10% TA = -40~85°C (1~10MHz)
 TA = -20~70°C (10~12.5MHz)

Symbol	Parameter	Variable		10MHz Clock		12.5MHz Clock		Units
		Min	Max	Min	Max	Min	Max	
t _{VCK}	TI4 clock cycle	8x + 100		900		740		ns
t _{VCKL}	TI4 Low clock pulse width	4x + 40		440		360		ns
t _{VCKH}	TI4 High clock pulse width	4x + 40		440		360		ns

210689


4.8 Interrupt Operation

V_{CC} = 5V ± 10% TA = -40~85°C (1~10MHz)
 TA = -20~70°C (10~12.5MHz)

Symbol	Parameter	Variable		10MHz Clock		12.5MHz Clock		Units
		Min	Max	Min	Max	Min	Max	
t _{INTAL}	NMI, INT0 Low level pulse width ()	4x		400		320		ns
t _{INTAH}	NMI, INT0 High level pulse width ()	4x		400		320		ns
t _{INTBL}	INT1, INT2 Low level pulse width ()	8x + 100		900		740		ns
t _{INTBH}	INT1, INT2 High level pulse width ()	8x + 100		900		740		ns


210689

(Reference) Definition of I_{DAR}



020289


4.9 I/O Interface Mode Timing Chart

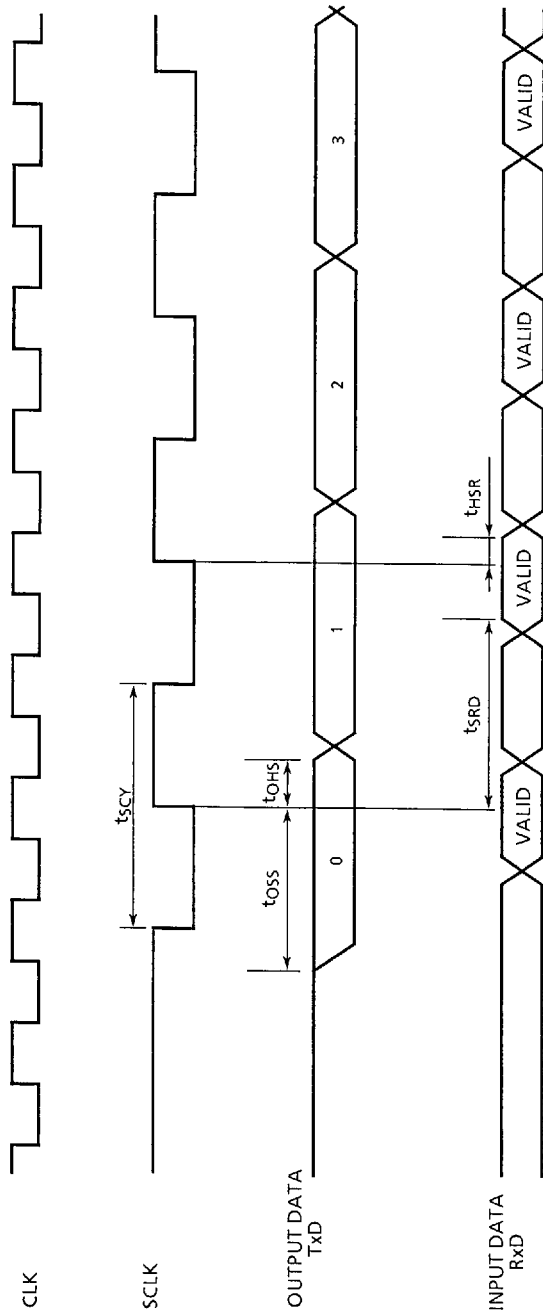

210689

TMP91C640 I/O Interface Mode Timing Waveforms

4.10 Timing Chart

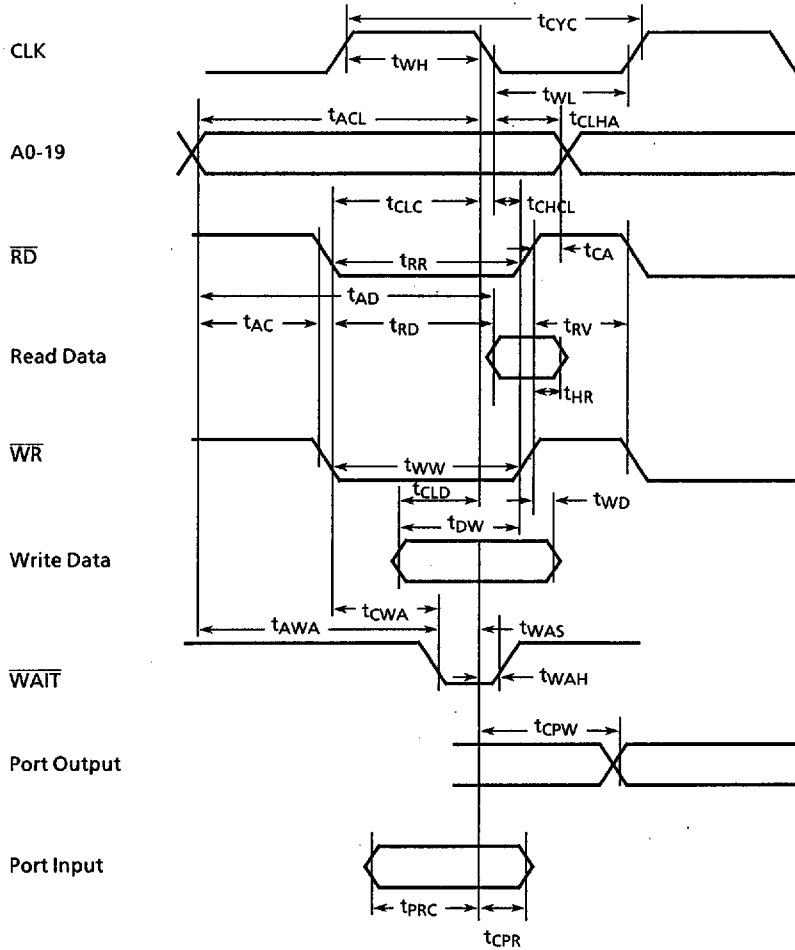

210689