




1N5817 THRU 1N5819

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 40 Volts

Forward Current - 1.0 Ampere

DO-204AL

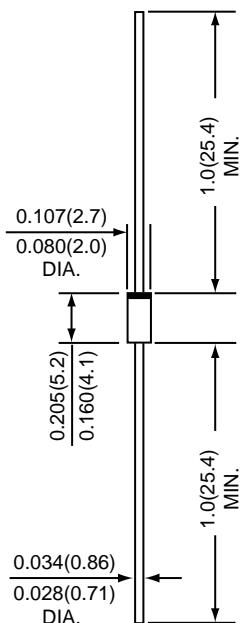

*Dimensions in inches and (millimeters)



FEATURES

- * The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- * Metal silicon junction, majority carrier conduction
- * Guardring for overvoltage protection
- * Low power loss, high efficiency
- * High current capability, low forward voltage drop
- * High surge capability
- * For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- * High temperature soldering guaranteed : 260°C / 10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case : JEDEC DO-204AL Molded plastic body
Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity : Color band denotes cathode end
Mounting Position : Any
Weight : 0.012 ounce, 0.3 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.	SYMBOLS	1N5817	1N5818	1N5819	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	Volts
Maximum RMS voltage	V _{RMS}	14	21	28	Volts
Maximum DC blocking voltage	V _{DC}	20	30	40	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at T _L =90°C	I _(AV)	1.0			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	25			Amps
Maximum instantaneous forward voltage at 1.0 A	V _F	0.450	0.550	0.600	Volts
Maximum instantaneous forward voltage at 3.1 A	V _F	0.750	0.875	0.900	Volts
Maximum instantaneous reverse current at rated DC reverse voltage T _A =25°C T _A =100°C	I _R	1.0 10.0			mA
Typical junction capacitance (NOTE 1)	C _J	110			pF
Typical thermal resistance (NOTE 2)	R _{θJA} R _{θJL}	50 15			°C / W
Operating junction and storage temperature range	T _{J,TSTG}	-65 to +125			°C

NOTES : (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(2) Thermal resistance from junction to lead, and/or to ambient P.C.B. mounted with 0.375" (9.5mm) length with 1.5 x 1.5" (38 x 38mm) copper pads

RATINGS AND CHARACTERISTIC CURVES 1N5817 THRU 1N5819

FIG.1 - FORWARD CURRENT DERATING CURVE

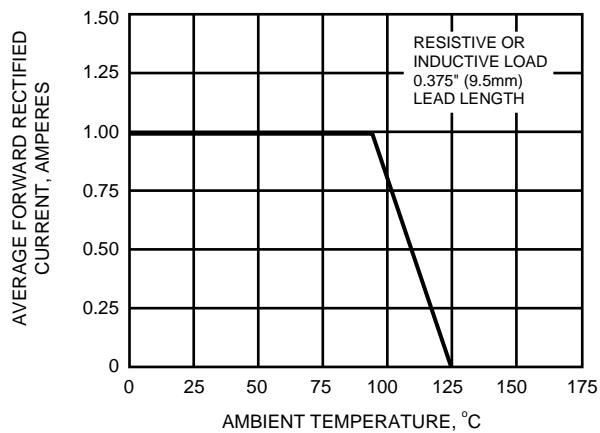


FIG.2 - MAXIMUM NON-REPETITIVE
PEAK FORWARD SURGE CURRENT

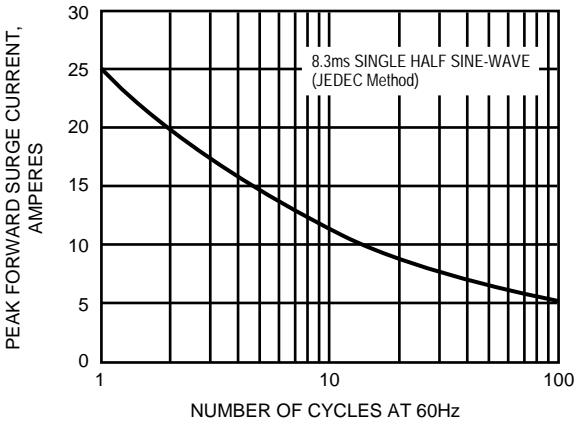


FIG.3 - TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

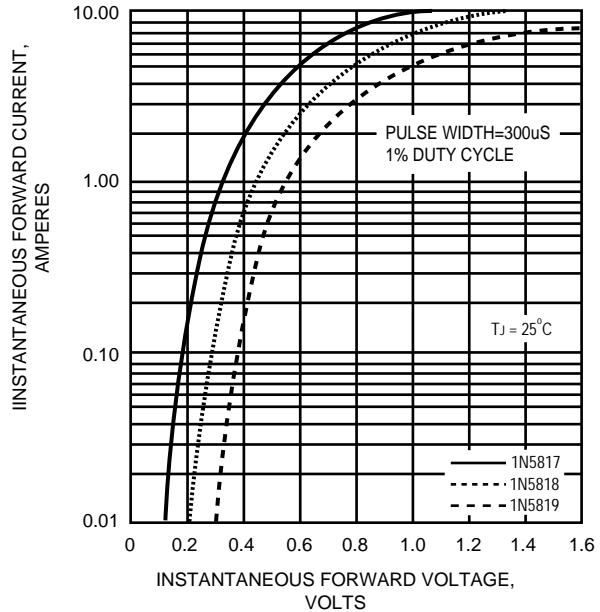


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

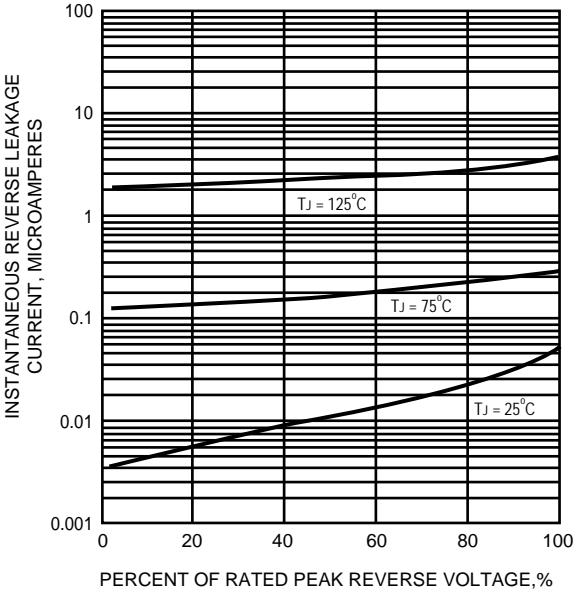


FIG.5 - TYPICAL JUNCTION CAPACITANCE

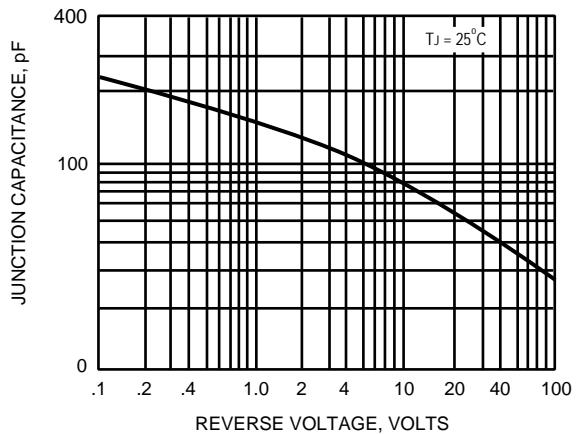


FIG.6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

