




No.1090

STK8260 II



Thick Film Hybrid Integrated Circuit
60W MIN AF POWER AMP. OUTPUT STAGE (DUAL SUPPLIES)
WITH BUILT-IN QUASI CLASS A BIAS CIRCUIT

Features

1. Switching distortion peculiar to class B amp. is zero.
2. Since power stage, bias controller, and temperature compensator are incorporated on the IMST substrate having good thermal conduction, no complicated temperature compensation using thermistor, etc. is required, thereby enabling good thermal stability.
3. By setting bias current externally, optimum conditions can be set.
4. 3-stage Darlington power pack.

Maximum Ratings at $T_a=25^\circ\text{C}$

Maximum Supply Voltage	V_{CC}^{\max}	± 56	V
Thermal Resistance θ_{j-C}	Ideal heat dissipation	1.3	$^\circ\text{C}/\text{W}$
Collector Current I_C		8	A
Junction Temperature T_j		150	$^\circ\text{C}$
Storage Temperature T_{stg}		-30 to +105	$^\circ\text{C}$
Available Time for Load Shorted	t_s	$V_{CC} = \pm 40\text{V}^*, f = 50\text{Hz}, P_o = 60\text{W}, R_L = 8\text{ohm}$	1 sec

Recommended Operating Conditions at $T_a=25^\circ\text{C}$

Recommended Supply Voltage	± 40	V
Load Resistance	8	ohm


Operating Characteristics at $T_a=25^\circ\text{C}, V_{CC} = \pm 40\text{V}, R_L = 8\text{ohm}, R_g = 600\text{ohm}$, at specified test circuit (based on Sample Application Circuit)

		min	typ	max	unit
Quiescent Current I_{CC0}	$V_{CC} = \pm 48\text{V}^{**}$			70	mA
Output Power P_o	THD = 0.005%, $f = 20\text{Hz}$ to 20kHz	60			W
Total Harmonic Distortion THD(1)	$P_o = 60\text{W}, f = 20\text{Hz}$ to 20kHz	0.004	0.005		%
THD(2)	$P_o = 1\text{W}, f = 20\text{Hz}$ to 20kHz	0.01			%
Emitter Resistance R_E		0.18	0.22	0.30	ohm



*:For measuring available time for load shorted, use the specified transformer power supply shown right.

**:Maximize semifixed resistor (VR1).

Equivalent circuit

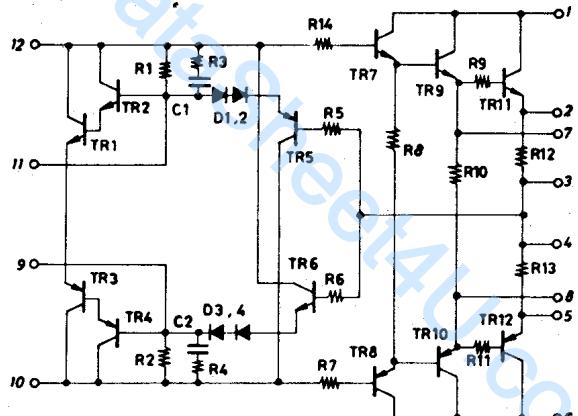


Case Outline 4020 (Equivalent to Tango MG-200)
(unit:mm)

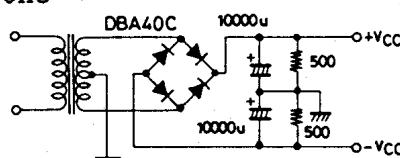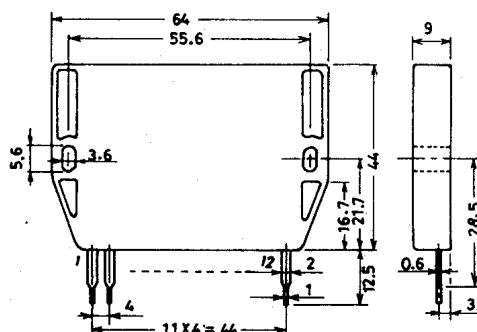

STK8260II

Sample Application Circuit : 60W min AF Power Amp.

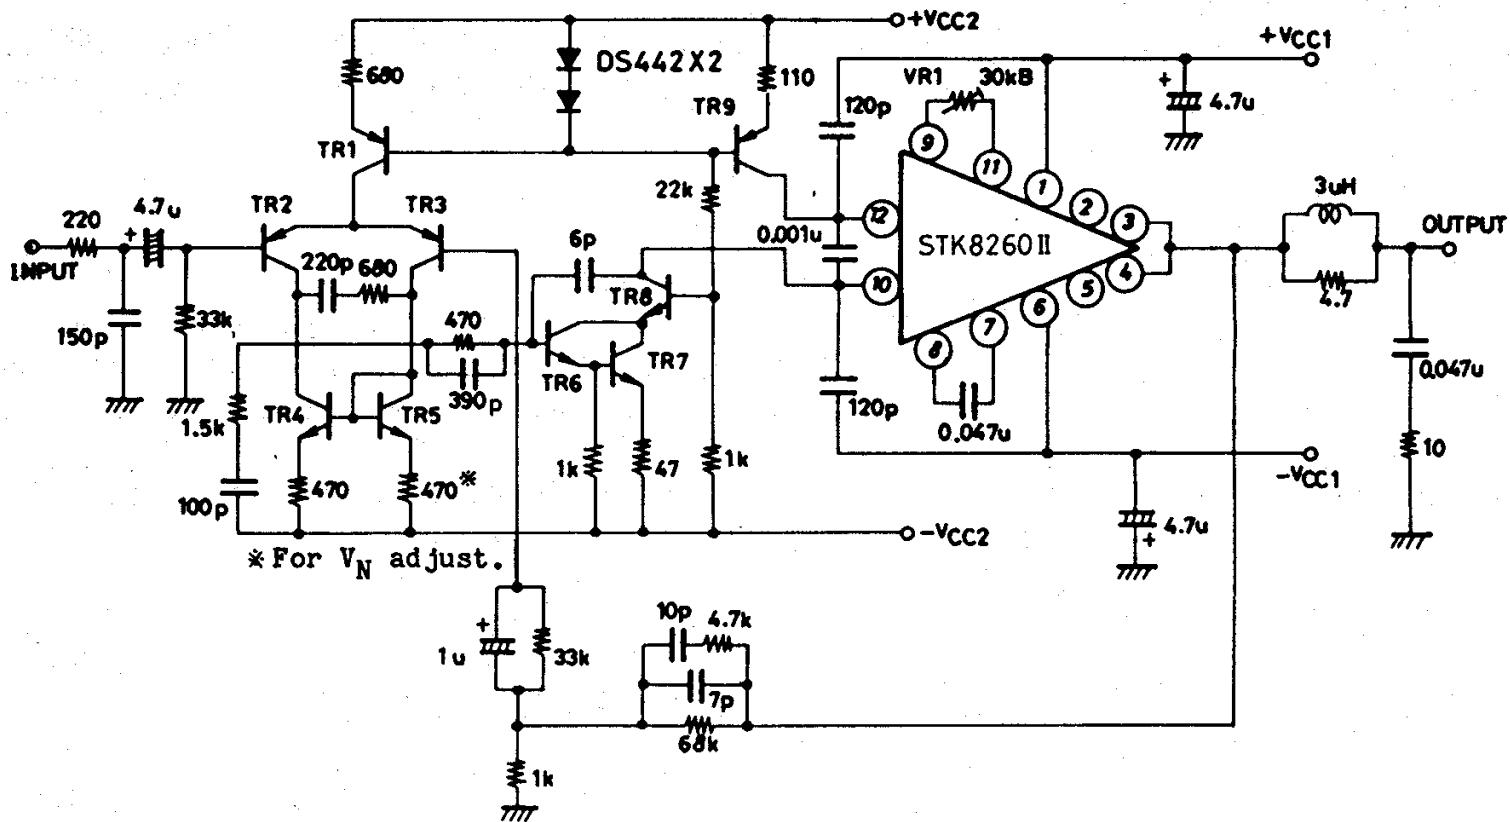

Information furnished by SANYO is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use, and no license is granted by implication or otherwise under any patent or patent rights of SANYO.