


DESCRIPTION

MGB49TA is green GaP LED lamp and MYB49TA is yellow GaAsP LED lamp, ultra high brightness output, encapsulated in a 4.7mm diameter clear transparent lens.

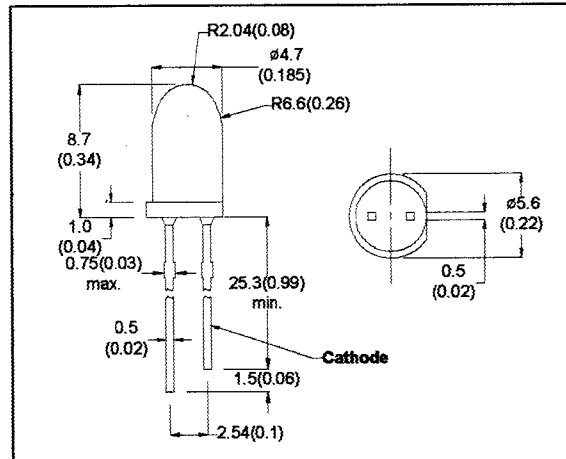

- All Dimension in mm (inch)
- No Scale
- Tol : +/- 0.3mm

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @ Ta=25°C
 Forward Current, DC (IF)
 Reverse Voltage
 Operating & Storage Temperature Range
 Lead Soldering Temperature (1/16" from body)

MGB49TA

MYB49TA

90mW	60mA
30mA	20mA
5V	5V
-55 to =100°C	
260°C for 5 sec.	

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER		SYMBOL	MGB49TA	MYB49TA	UNIT	CONDITIONS
Forward Voltage	MAX	V _F	3.0	3.0	V	I _F =20mA
Reverse Breakdown Voltage	MIN	BV _R	5	5	V	I _R =100 μA
Luminous Intensity	MIN	I _V	300	180	mcd	I _F =20mA
	TYP		500	300	mcd	I _F =20mA
Peak Wavelength	TYP	λ _p	570	585	nm	I _F =20mA
Spectral Line Half Width	TYP	Δλ	30	35	nm	I _F =20mA
Viewing Angle	TYP	2θ 1/2	12	12	degree	IF=20mA

Rev.B.

MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Aug-99