



### **CATV Ultra-Linear Power Amp**



Top View

**Bottom View** 

#### **Description**

The TriQuint TGA2801B-EPU is an ultra-linear, packaged power amplifier which operates from 40MHz to 1000MHz. The amplifier available in a standard 16 lead SOIC package. The amplifier provides a flat gain along with ultra-low distortion. It also provides a high output power with a low DC power consumption. This amplifier is ideally suited for use in CATV distribution systems or other applications requiring high output powers and extremely low distortion. Demonstration Boards are available.


#### **Primary Applications**

- HFC Nodes
- CATV Line Amplifiers
- Head End Equipment


#### TGA2801B-EPU-SG


#### **Key Features and Performance**

- Flat Gain
- Ultra-Low Distortion (47dBm IP3 typ.)
- Wide Bandwidth (40MHz-1GHz)
- Low DC Power Consumption
- Single Supply Bias (+12V)
- Surface Mount Package
- High Power Compression (P1dB 28.5 dBm typ.)
- Unconditionally Stable
- Proven GaAs Technology

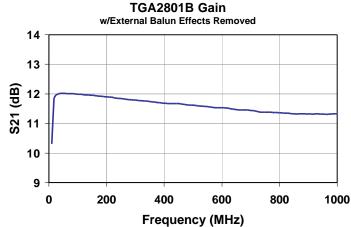

#### TGA2801B Distortion 114ch 44dBmV Flat Vd=12V, Id=425mA

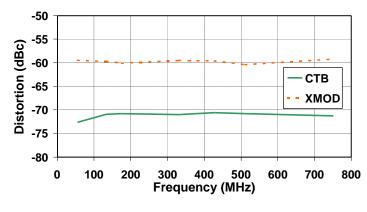

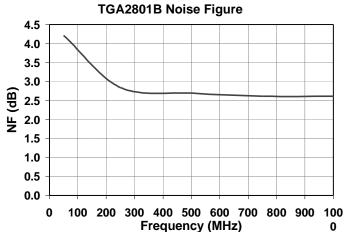



### Maximum Ratings 1/

Symbol	Parameter	Min	Max	Units	Notes
$V_{DD}$	Bias Supply Voltage	0	15	V	
I <sub>DD</sub>	Bias Supply Current		615	mA	<u>2</u> /
P <sub>IN</sub>	RF Input Power		70	dBmV	
$T_{ASSY}$	Assembly Temperature (30 seconds max)		300	°C	
T <sub>STG</sub>	Storage Temperature	-65	150	°C	
T <sub>CASE</sub>	Package Operating Temperature (Heat Slug)	-40	100	°C	

- 1/ These values reflect maximum operable values for this device. Operating above the recommended values may directly affect MTTF.
- 2/ Total Current

#### **DC Specifications**

Symbol	Parameter	Тур	Unit
$V_{DD}$	Bias Supply Voltage	12	٧
I <sub>DD</sub>	Bias Supply Current	425	mA
$V_{G1}$	Gate 1 Voltage (Pin 7)	0.33	V
$V_{G2}$	Gate 2 Voltage (Pin 2)	4.15	V
V <sub>out1</sub>	RF Output 1 Voltage (Pin 14)	$V_{DD}$	V
V <sub>out2</sub>	RF Output 2 Voltage (Pin 11)	$V_{DD}$	V



#### **RF Specifications**

 $T_A=25^{\circ}C, V_{DD}=12V$ 

Symbol	Parameter	Min	Тур	Max	Units
BW	Bandwidth	40		870	MHz
S <sub>21</sub>	Gain <u>1</u> /		12.0		dB
GF	Gain Flatness 1/		±0.3		dB
NF	Noise Figure		2.6		dB
P <sub>1dB</sub>	1dB Gain Compression @ 1GHz		28.5		dBm
IP <sub>3</sub>	Two-Tone, Third-Order Intercept (625 & 700MHz)		47		dBm
СТВ	Composite Triple Beat Distortion 2/		-71		dBc
CSO	Composite Second Order Distortion 2/		-71		dBc
XMOD	Cross Modulation 2/		-60		dBc
IRL	Input Return Loss 1/3/		22		dB
ORL	Output Return Loss 1/3/		22		dB
I <sub>DD</sub>	Drain Current 4/		425	450	mA

- 1/ Measured performance of chip alone. Balun effects have been removed.
- 2/ 112-Channel flat, +44dBmV/channel output
- 3/ Using application circuit on last page
- 4/ Increasing drain current will improve linearity of device


TriQuint Semiconductor Texas: (972)994 8465 Fax (972)994 8504 Web: www.triquint.com





## Typical Measured S-Parameters Using Application Circuit

(includes effects of external baluns)

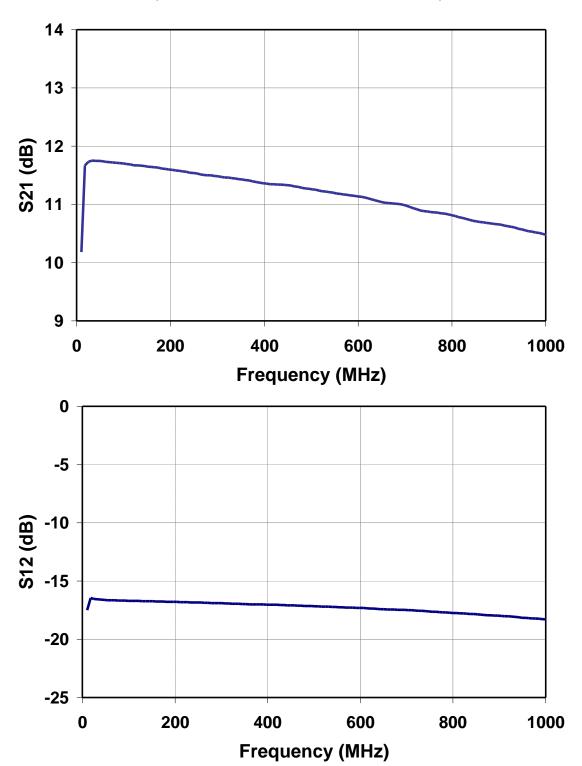






## Typical Measured S-Parameters Using Application Circuit


(includes effects of external baluns)

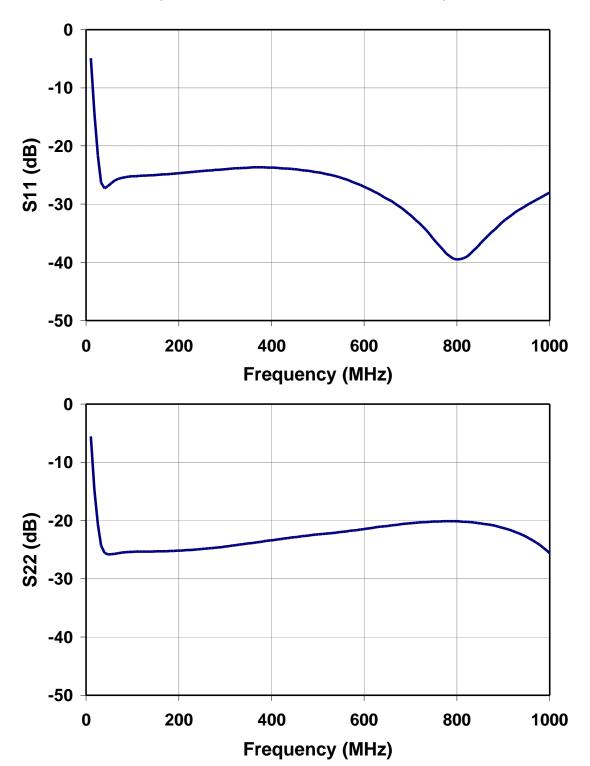






### **Mechanical Specifications**

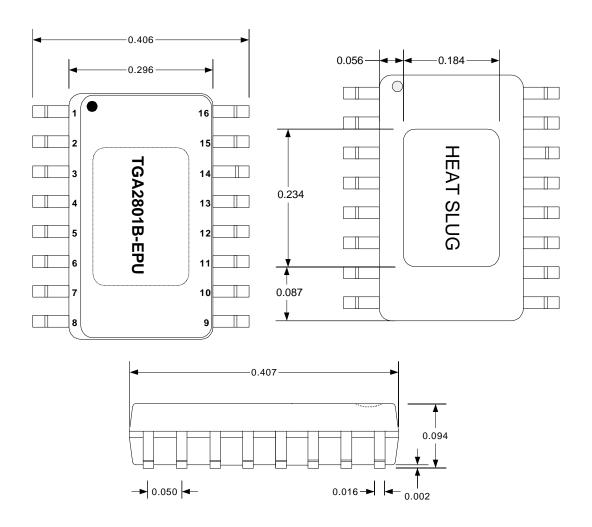




### **Pinout**

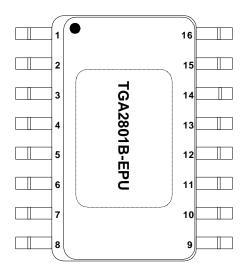

### **Pin Description**

Pin	Description
1	GND
2	Gate 2: Open Circuit on PC Board
3	RF Input 1
4	GND
5	GND
6	RF Input 2
7	Gate 1: Current Adjust $R_1 = 274\Omega$ to GND
8	GND
9	GND
10	V <sub>DD</sub>
11	RF Output 2
12	GND
13	GND
14	RF Output 1
15	$V_{DD}$
16	GND



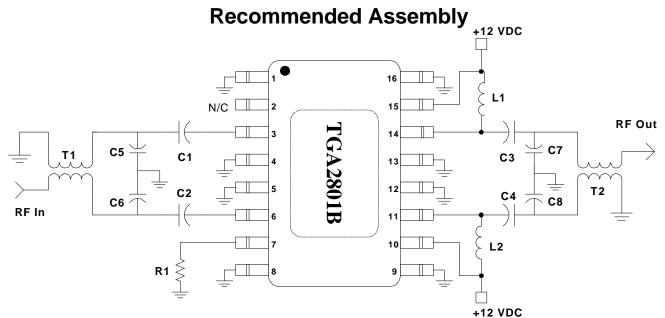

### **Component Description**

Ref	Description
C1	0.01μF Capacitor
C2	0.01μF Capacitor
C3	300pF Capacitor
C4	300pF Capacitor
C5 - C8	1.0pF - 2.0pF Capacitor <b><u>3</u>/</b>
L1	390nH Inductor
L2	390nH Inductor
R1	Current Adjust <b>2/</b> R <sub>1</sub> = open circuit
T1	Balun <u>1</u> /
T2	Balun <u>1</u> /

<u>1</u>/ Balun performance impacts amplifier return losses and gain. Best performance can be achieved by winding 34 or 36 gauge bifilar wire around a small binocular core made from low-loss magnetic material. Suitable wire may be obtained from MWS Wire Industries. Core vendors include Ferronics, Fairrite, TDK, and Micrometals.

Alternatively, off-the-shelf baluns can be purchased from a number of vendors including Mini-Circuits (ADTL1-18-75), M/A-COM (ETC1-1-13), and Pulse Engineering (CX2071).

- 2/ Current can be adjusted by either changing the resistor value or forcing a voltage on pin 7.
- 3/ Tunes out balun inductance. Selected for best return loss.