




B0520WS/B0530WS/B0540WS

Schottky Barrier Diode




1 CATHODE 2 ANODE

SOD-323

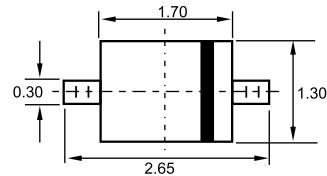

Features

- ◊ Low forward voltage drop.
- ◊ Guard ring construction for transient Protection.
- ◊ High conductance.



Applications

- ◊ surface mount schottky barrier rectifier.

Dimensions in inches and (millimeters)

Ordering Information

Type No.	Marking	Package Code
B0520LWS	SD	SOD-323
B0530WS	SE	SOD-323
B0540WS	SF	SOD-323

MAXIMUM RATING @ $T_a=25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	B0520WS	B0530WS	B0540WS	Unit
Peak Repetitive Reverse Voltage	V_{RRM}				
Working Peak Reverse Voltage	V_{RWM}	20	30	40	V
DC Reverse Voltage	V_R				
RMS Reverse Voltage	$V_{R(RMS)}$	14	21	28	V
Average Rectified Output Current	I_O	0.5			A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	5.5			A
Power Dissipation	P_d	250			mW
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	244			$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_j, T_{stg}	-65 to +125			$^\circ\text{C}$
Voltage Rate of Change	dv/dt	1000			$\text{V}/\mu\text{s}$

ELECTRICAL CHARACTERISTICS @ $T_a=25^\circ C$ unless otherwise specified

Characteristic	Symbol	B0520LW	B0530W	B0540W	Unit	Test Conditions
Minimum Reverse Breakdown Voltage	$V_{(BR)R}$	20 - -	- 30 -	- - 40	V	$I_R = 250\mu A$ $I_R = 130\mu A$ $I_R = 20\mu A$
Maximum Forward Voltage Drop	V_{FM}	0.300 0.385 -	0.375 0.430 -	0.510 0.620	V	$I_F = 0.1A,$ $I_F = 0.5A,$ $I_F = 1.0A,$
Maximum Leakage Current	I_{RM}	75 - 250 - -	- 20 - 130 -	- - 10 - 20	μA	$V_R = 10V,$ $V_R = 15V,$ $V_R = 20V,$ $V_R = 30V,$ $V_R = 40V,$
Reverse Recovery Time	t_{rr}	4			ns	$I_F = I_R = 10mA$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$
Junction Capacitance	C_J	170			pF	$f = 1MHz, V_R = 0V DC$

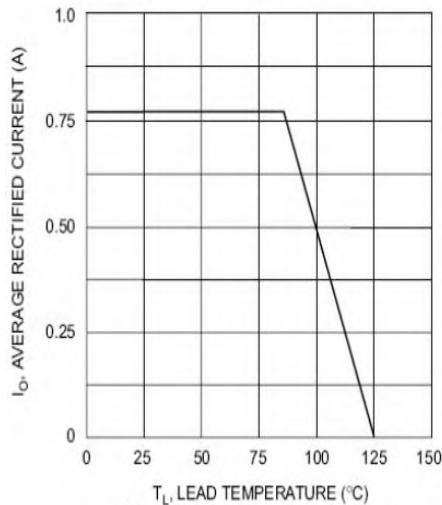
TYPICAL CHARACTERISTICS @ $T_a=25^\circ C$ unless otherwise specified


Fig. 1 Forward Current Derating Curve

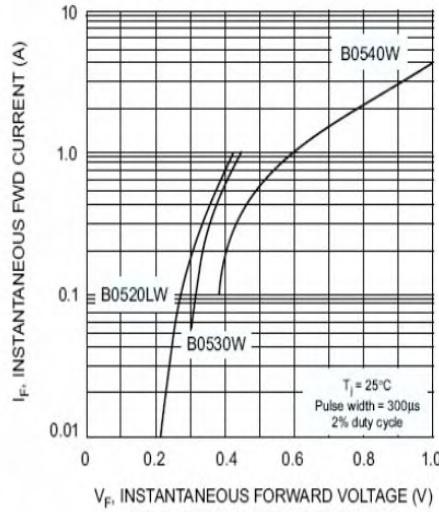


Fig. 2 Typical Forward Characteristics

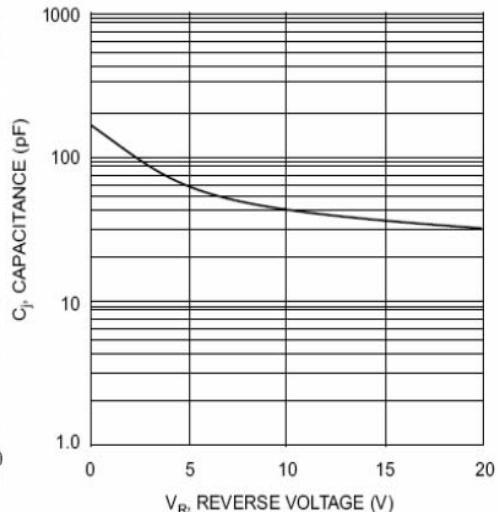


Fig. 3 Typ. Junction Capacitance vs Reverse Voltage