

# A11a DIP PLUG

**PITCH: 2.0mm**

## SPECIFICATIONS

### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

### Electrical

Current Rating : 1 Amp DC





Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

• Terminated with 1.00mm pitch flat ribbon cable.

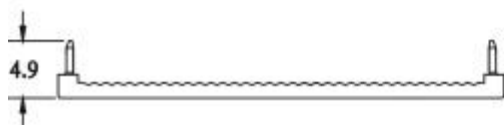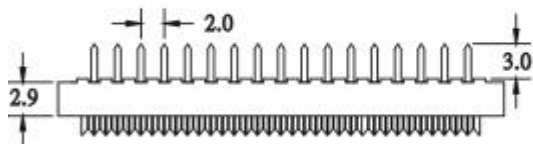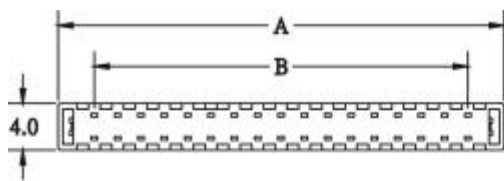

POSITION	A	B
8	13.20	6.00
10	15.20	8.00
12	17.20	10.00
14	19.20	12.00
16	21.20	14.00
20	25.20	18.00
22	27.20	20.00
24	29.20	22.00
26	31.20	24.00
30	35.20	28.00
34	39.20	32.00
40	45.20	38.00
44	49.20	42.00
50	55.20	48.00
68	73.20	66.00

## HOW TO ORDER:

A11a -  -  -  -

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
08 10 12 14 16 20 22 24 26 30 34 40 44 50 68	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	1. BLACK