


- Designed for Complementary Use with the BD544 Series
- 70 W at 25°C Case Temperature
- 8 A Continuous Collector Current
- 10 A Peak Collector Current
- Customer-Specified Selections Available

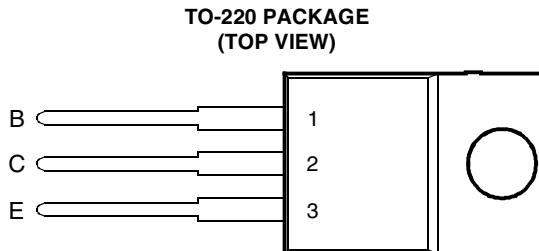

Pin 2 is in electrical contact with the mounting base.

MDTRACA

absolute maximum ratings at 25°C case temperature (unless otherwise noted)

RATING		SYMBOL	VALUE	UNIT
Collector-base voltage ($I_E = 0$)	BD543	V_{CBO}	40	V
	BD543A		60	
	BD543B		80	
	BD543C		100	
Collector-emitter voltage ($I_B = 0$)	BD543	V_{CEO}	40	V
	BD543A		60	
	BD543B		80	
	BD543C		100	
Emitter-base voltage	V_{EBO}		5	V
Continuous collector current	I_C		8	A
Peak collector current (see Note 1)	I_{CM}		10	A
Continuous device dissipation at (or below) 25°C case temperature (see Note 2)	P_{tot}		70	W
Continuous device dissipation at (or below) 25°C free air temperature (see Note 3)	P_{tot}		2	W
Operating free air temperature range	T_A		-65 to +150	°C
Operating junction temperature range	T_j		-65 to +150	°C
Storage temperature range	T_{stg}		-65 to +150	°C
Lead temperature 3.2 mm from case for 10 seconds	T_L		260	°C

NOTES: 1. This value applies for $t_p \leq 0.3$ ms, duty cycle $\leq 10\%$.
 2. Derate linearly to 150°C case temperature at the rate of 0.56 W/°C.
 3. Derate linearly to 150°C free air temperature at the rate of 16 mW/°C.

PRODUCT INFORMATION

electrical characteristics at 25°C case temperature

PARAMETER	TEST CONDITIONS			MIN	TYP	MAX	UNIT
$V_{(BR)CEO}$ Collector-emitter breakdown voltage	$I_C = 30 \text{ mA}$ (see Note 4)		$I_B = 0$	BD543 BD543A BD543B BD543C	40 60 80 100		V
	$V_{CE} = 40 \text{ V}$	$V_{BE} = 0$		BD543		0.4	
	$V_{CE} = 60 \text{ V}$	$V_{BE} = 0$		BD543A		0.4	
	$V_{CE} = 80 \text{ V}$	$V_{BE} = 0$		BD543B		0.4	
I_{CES} Collector-emitter cut-off current	$V_{CE} = 100 \text{ V}$	$V_{BE} = 0$		BD543C		0.4	
	$V_{CE} = 30 \text{ V}$	$I_B = 0$		BD543/543A		0.7	
	$V_{CE} = 60 \text{ V}$	$I_B = 0$		BD543B/543C		0.7	mA
	$V_{EB} = 5 \text{ V}$	$I_C = 0$				1	mA
h_{FE} Forward current transfer ratio	$V_{CE} = 4 \text{ V}$	$I_C = 1 \text{ A}$		60			
	$V_{CE} = 4 \text{ V}$	$I_C = 3 \text{ A}$	(see Notes 4 and 5)	40			
	$V_{CE} = 4 \text{ V}$	$I_C = 5 \text{ A}$		15			
$V_{CE(sat)}$ Collector-emitter saturation voltage	$I_B = 0.3 \text{ A}$	$I_C = 3 \text{ A}$			0.5		
	$I_B = 1 \text{ A}$	$I_C = 5 \text{ A}$	(see Notes 4 and 5)		0.5		V
	$I_B = 1.6 \text{ A}$	$I_C = 8 \text{ A}$			1		
V_{BE} Base-emitter voltage	$V_{CE} = 4 \text{ V}$	$I_C = 5 \text{ A}$	(see Notes 4 and 5)			1.4	V
h_{fe} Small signal forward current transfer ratio	$V_{CE} = 10 \text{ V}$	$I_C = 0.5 \text{ A}$		20			
$ h_{fel} $ Small signal forward current transfer ratio	$V_{CE} = 10 \text{ V}$	$I_C = 0.5 \text{ A}$	$f = 1 \text{ MHz}$	3			

NOTES: 4. These parameters must be measured using pulse techniques, $t_p = 300 \mu\text{s}$, duty cycle $\leq 2\%$.

5. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

thermal characteristics

PARAMETER	MIN	TYP	MAX	UNIT
$R_{\theta JC}$ Junction to case thermal resistance			1.79	°C/W
$R_{\theta JA}$ Junction to free air thermal resistance			62.5	°C/W

resistive-load-switching characteristics at 25°C case temperature

PARAMETER	TEST CONDITIONS †			MIN	TYP	MAX	UNIT
t_{on} Turn-on time	$I_C = 6 \text{ A}$	$I_{B(on)} = 0.6 \text{ A}$	$I_{B(off)} = -0.6 \text{ A}$		0.6		μs
t_{off} Turn-off time	$V_{BE(off)} = -4 \text{ V}$	$R_L = 5 \Omega$	$t_p = 20 \mu\text{s}, dc \leq 2\%$		1		μs

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.

PRODUCT INFORMATION

TYPICAL CHARACTERISTICS

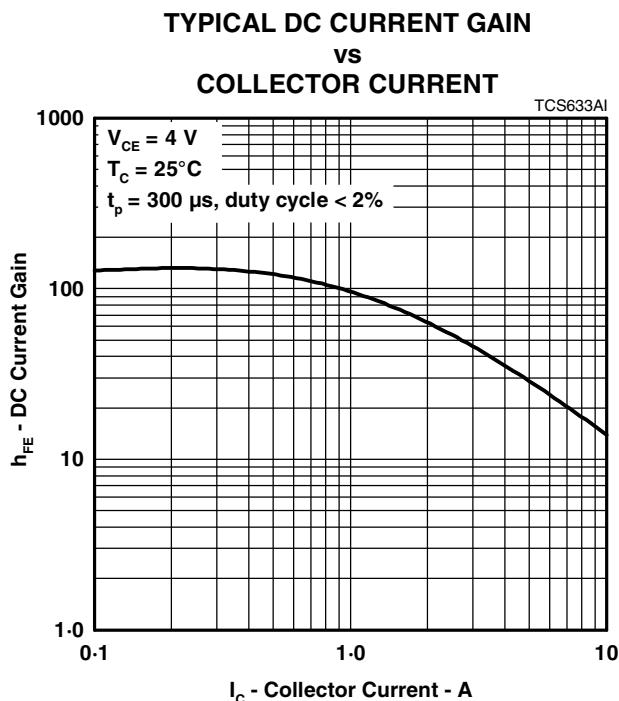


Figure 1.

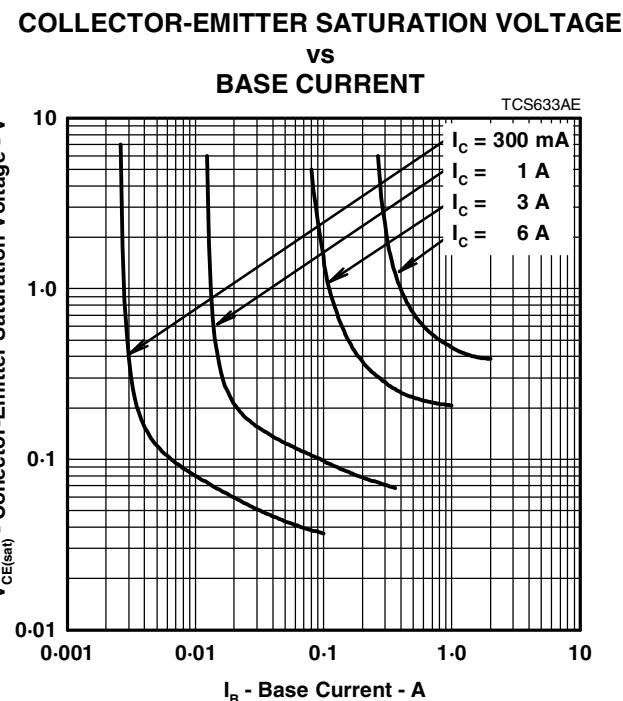


Figure 2.

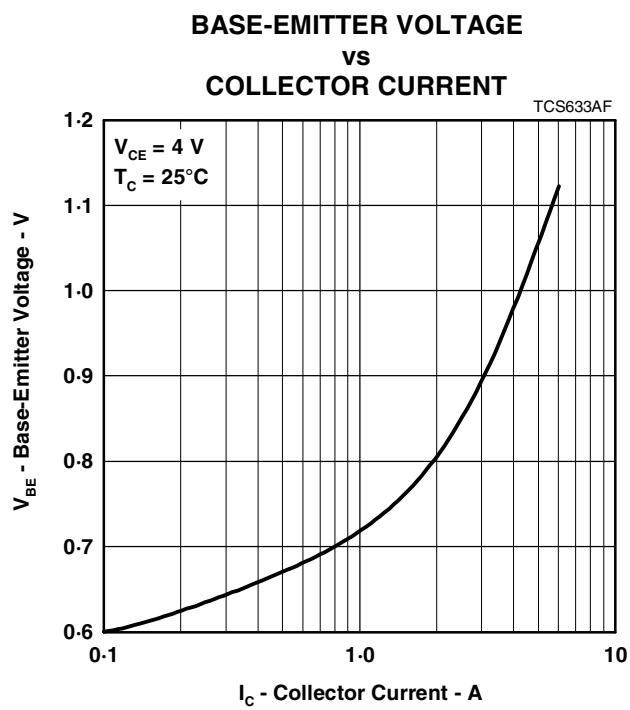


Figure 3.

PRODUCT INFORMATION

JUNE 1973 - REVISED SEPTEMBER 2002
 Specifications are subject to change without notice.

MAXIMUM SAFE OPERATING REGIONS

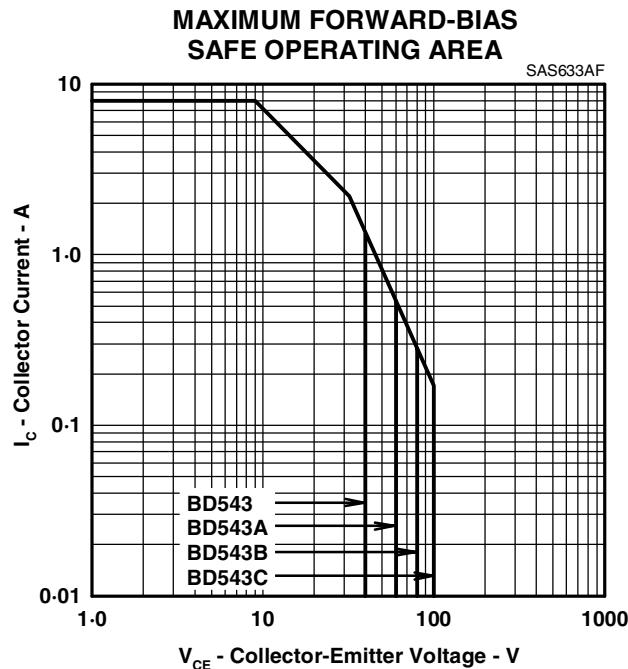


Figure 4.

THERMAL INFORMATION

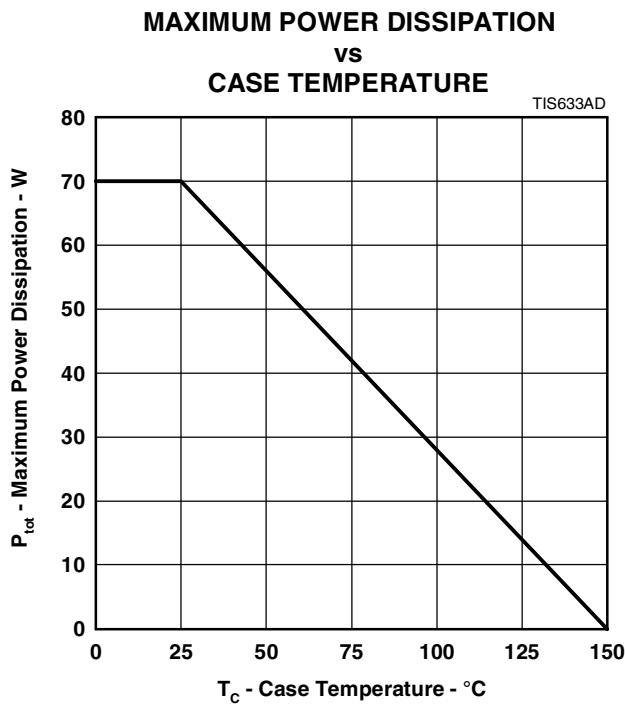


Figure 5.

PRODUCT INFORMATION



MECHANICAL DATA

TO-220


3-pin plastic flange-mount package

This single-in-line package consists of a circuit mounted on a lead frame and encapsulated within a plastic compound. The compound will withstand soldering temperature with no deformation, and circuit performance characteristics will remain stable when operated in high humidity conditions. Leads require no additional cleaning or processing when used in soldered assembly.

TO220

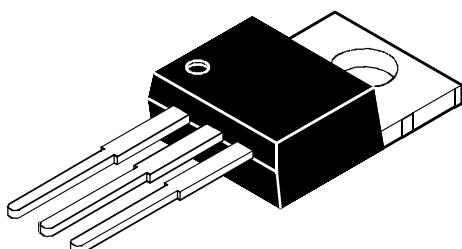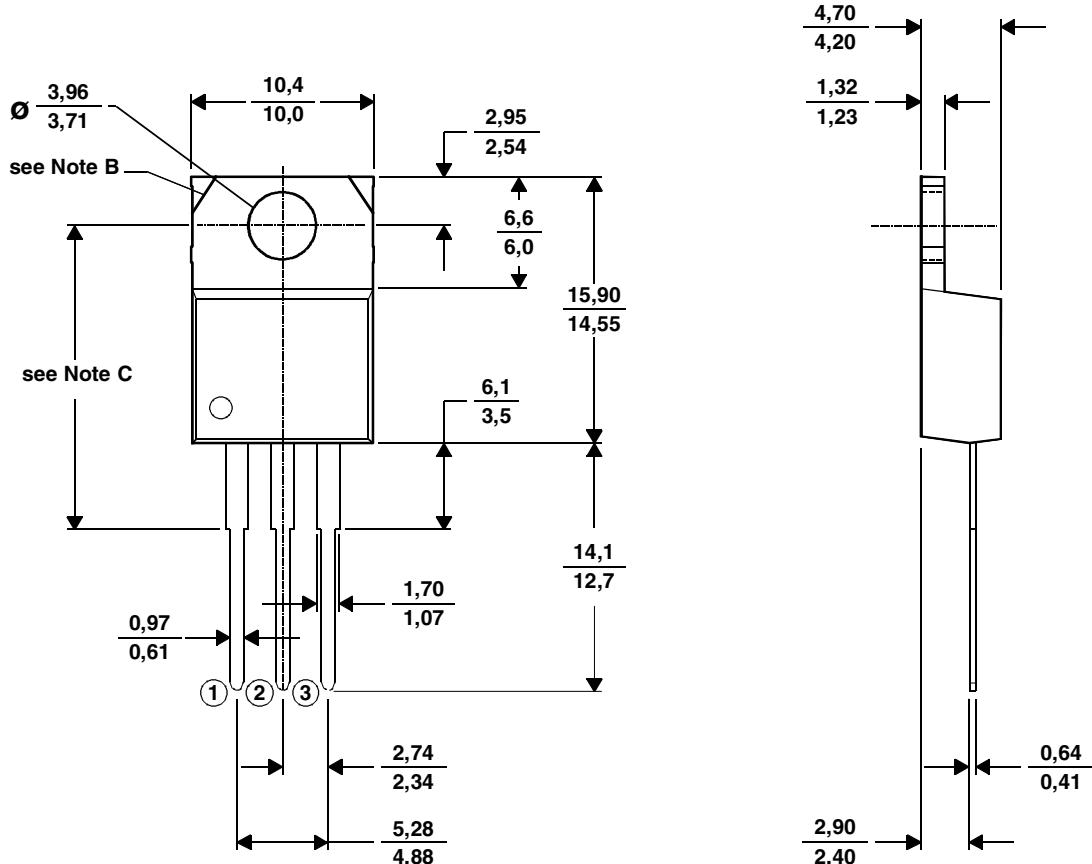

VERSION 1

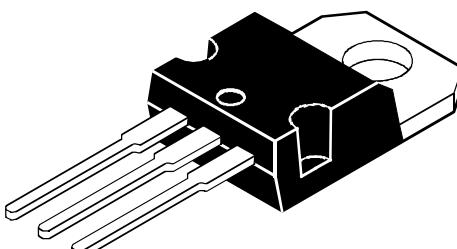

VERSION 2

ALL LINEAR DIMENSIONS IN MILLIMETERS

NOTES: A. The centre pin is in electrical contact with the mounting tab.

MDXXBE

B. Mounting tab corner profile according to package version.

C. Typical fixing hole centre stand off height according to package version.

Version 1, 18.0 mm. Version 2, 17.6 mm.

PRODUCT INFORMATION