

14FF- 2Z- A1-1/2/3

RELAY SOCKET



CHARACTERISTICS

Ambient temperature :	-40 °C to 70°C
Rated voltage:	300VAC
Rated current :	10A (per pole)
Insulation voltage (Min.) :	5000VAC
Protection degree DIN40050 :	IP20
Socket material :	PBT V0 (UL)
Contacts spring material :	QSn6.5-0.1
Steel retainer :	available
White plastic tag :	non-available



Applicable relay type:

- 1: suit for HF115F(JQX-115F) series (Relay height 15.7mm).
- 2: suit for HF140FF(JZX-140FF) (Relay height 25.5mm).
- 3: suit for HF14FW(JQX-14FW) (Relay height 26.3mm).

DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM


Unit: mm

Outline Dimensions

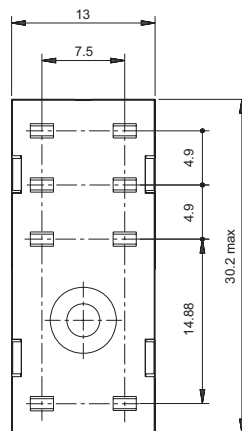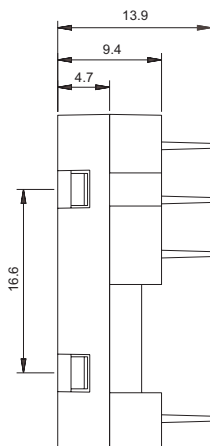


(Top View)

Wiring Diagram

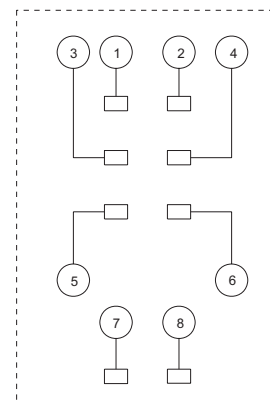

(Top View)

Retainer Dimensions



Three types of retainer height (H) :

H1=17.2mm (for -1 type)

H2=27.2mm (for -2 type)

H3=27.8mm (for -3 type)

You can choose the type you need.



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00