


Application:

Handheld POS terminal
 Handheld logistic terminal
 Multi-language Translator
 Children educator
 Analyzer terminal
 Scope meter

Preliminary Release
 Contact us for detail information.

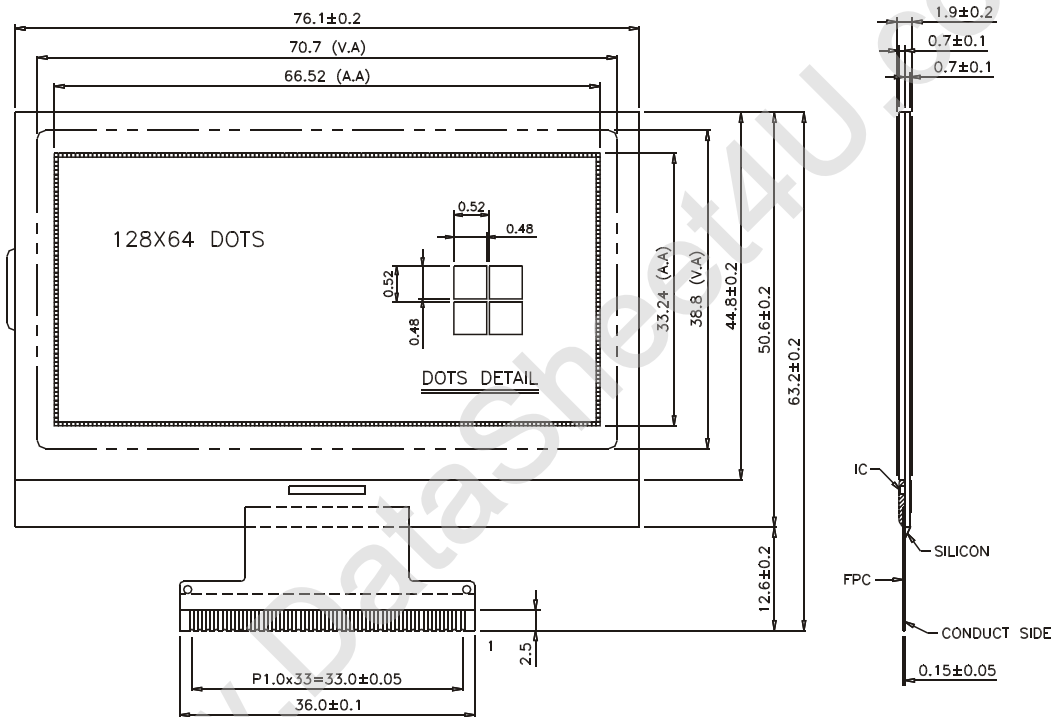

Dimension

Dot size: W0.48 x H0.48 mm
 Dot pitch: W0.52 x H0.52 mm
 Active area: W66.52 x H33.24 mm
 View area: W70.70 x H38.80 mm
 Outline: W76.10 x H50.60 mm(not includes FPC)
 Thickness: 1.90 mm

Benefits:

- Supply voltage 3.3V
- Low current consumption 0.5mA without B/L
- Low profile, light & thin
- Sample available

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Symbol	CS1	RES	Ao	WR(R/W)	RD(E)	D0	D1	D2	D3	D4	D5	D6	D7	V _{DD}	V _{SS}	V _{OUT}	CAP5-
Pin No.	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34
Symbol	VSP3-	CAP1+	CAP1-	CAP2-	CAP2+	CAP4-	VRS	V1	V2	V3	V4	V5	VR	C86	P/S	HPM	IRS

Head quarters

PowerTip Technology Corporation
 8, 6th Road, Taichung Industrial Park,
 Taichung, 407 Taiwan
 TEL: 886-4-23558168
 FAX: 886-4-23558166
 Http://www.powerTip.com.tw
 E-mail: sales@mail.powerTip.com.tw

Manufacturing bases

Taiwan LCM factory
 Taichung Industrial Park,
 Taichung, Taiwan

China LCM factory
 Dong Keng,
 Dung Guan, China

Taiwan LCD factory
 Taichung Industrial Park,
 Taichung, Taiwan

China LCD factory
 Dong Keng,
 Dung Guan, China

Abroad contacts

PowerTip Technology Limited
 Room 02, 9/F, Block A,
 Po Lung Centre,
 11 Wang Chiu Road,
 Kowloon Bay, Kowloon, H.K.
 TEL: 852-31070920
 FAX: 852-31070936

PowerTip Technology, Inc.
 18 Technology Drive, Suite 161,
 Irvine, CA92618, U.S.A.
 TEL: 1-(949)585-9888
 FAX: 1-(949)585-9889
 Http://www.powerTipusa.com
 E-mail: sales@powerTipusa.com