




**Dimensions:** dimensions are in mm

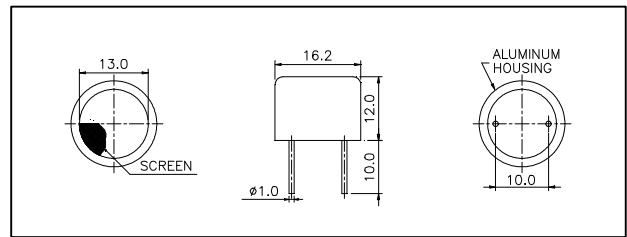

**Specification**

<b>400ST160</b>	Transmitter
<b>400SR160</b>	Receiver
<b>Center Frequency</b>	40.0±1.0Khz
<b>Bandwidth (-6dB)</b>	400ST160 2.0Khz 400SR160 2.5Khz
<b>Transmitting Sound Pressure Level</b>	120dB min.
at 40.0Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	
<b>Receiving Sensitivity</b>	-65dB min.
at 40.0Khz 0dB = 1 volt/μbar	
<b>Capacitance at 1Khz</b>	±20% 2400 pF
<b>Max. Driving Voltage (cont.)</b>	20Vrms
<b>Total Beam Angle</b>	-6dB 55° typical
<b>Operation Temperature</b>	-30 to 80°C
<b>Storage Temperature</b>	-40 to 85°C

All specification taken typical at 25°C  
Closer frequency tolerance can be supplied upon request.


Models available:

1	400ST/R160	Aluminum Housing
2	400ST/R16B	Black Al. Housing
2	400ST/R10P	Plastic Housing
3	400ST/R16F	Al. Housing w/Solid Grid

**Impedance/Phase Angle vs. Frequency**


Tested under 1Vrms Oscillation Level

400SR160 Impedance (Red solid line)  
400SR160 Phase (Blue solid line)  
400ST160 Impedance (Red dotted line)  
400ST160 Phase (Blue dotted line)

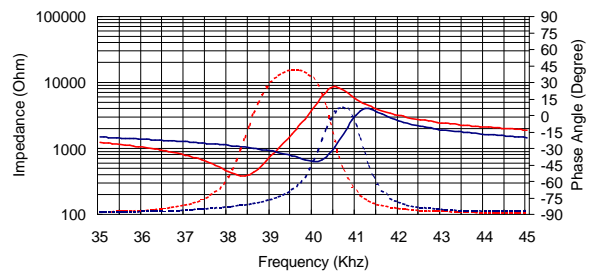


**Sensitivity/Sound Pressure Level**

Tested under 10Vrms @30cm

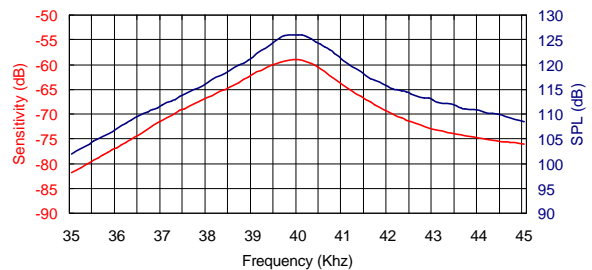


**Beam Angle:** Tested at 40.0Khz frequency

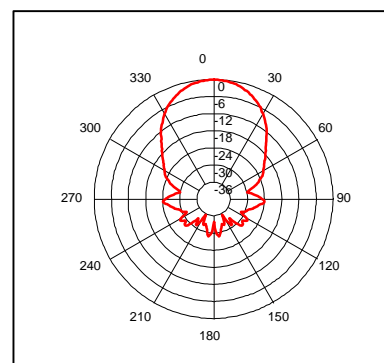


400SR160 Receiver

400ST160 Transmitter


Sensitivity Variation vs. Loaded Resistor

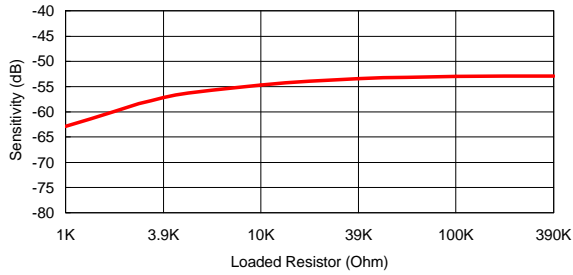


SPL Variation vs. Driving Voltage

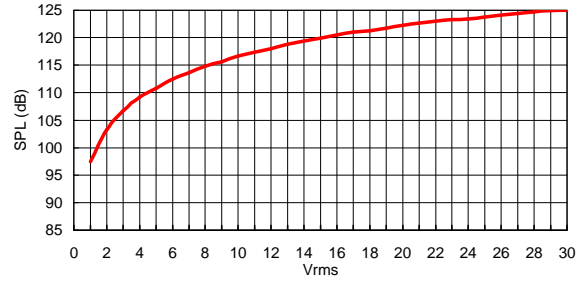


Center Frequency Shift vs. Loaded Resistor

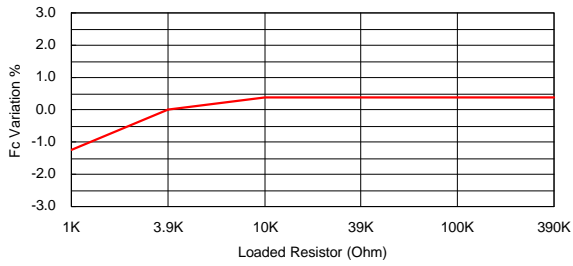


Center Frequency Shift vs. Driving Voltage

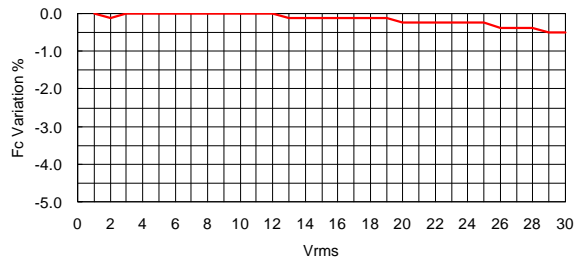


Sensitivity Variation vs. Temperature

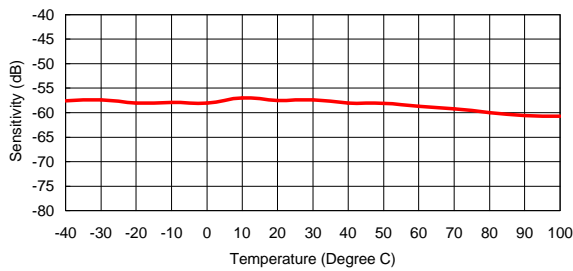

SPL Variation vs. Temperature

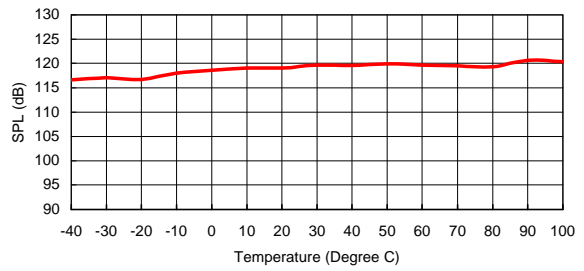

Center Frequency Shift vs. Temperature

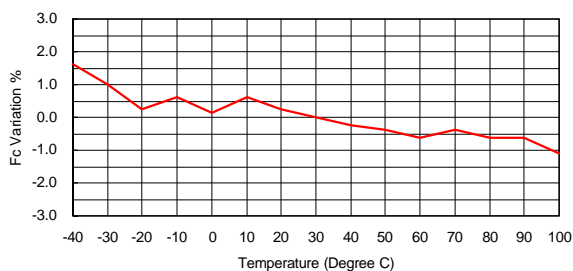

Center Frequency Shift vs. Temperature

