



M/A-COM

# E-Series RF Inductor 50 MHz




## Features

- High Q Value



## SM-52 Package

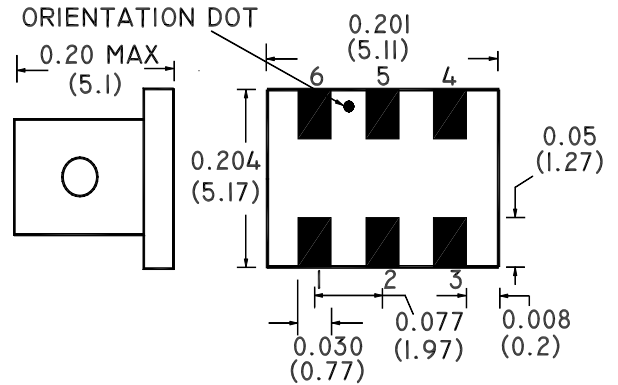

## Description

M/A-COM's EIN9 is a high Q Toroidal Inductor on an SM-52 package. This Inductor is particularly suited to applications requiring Inductors with good magnetic field containment.

## Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-20°C to +85°C
Storage Temperature	-20°C to +85°C

Please Note that the photograph above indicates typical package only, not actual unit.

## Electrical Specifications @ 25°C

Parameter	Typical	Minimum
Guaranteed Performance @ 50 MHz	—	—
Inductance Value	246 nH ±5%	—
Q Value	—	90
Self Resonance	> 570 MHz	—

## Functional Configuration

Function	Pin No.
Primary Dot	6
Primary	1
Case Ground	—
Not Connected	—

V2.00 S 1294 C



M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel.+85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

www.macom.com

AMP and Connecting at a Higher Level are trademarks. Specifications subject to change without notice.





M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel.+85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

[www.macom.com](http://www.macom.com)

AMP and Connecting at a Higher Level are trademarks.  
*Specifications subject to change without notice.*

