

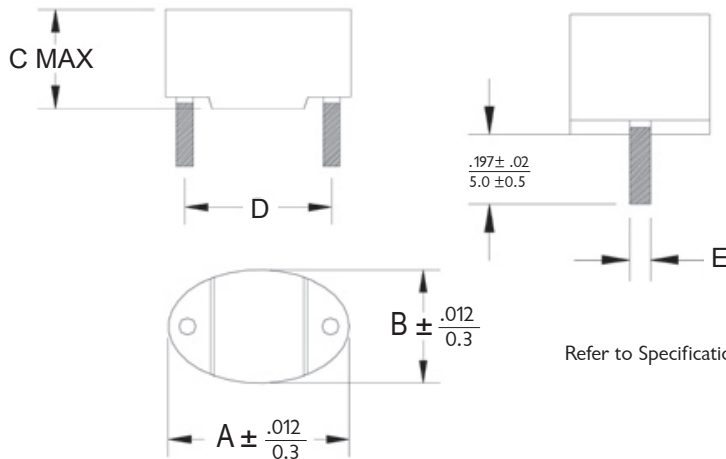

NEW
Self-Shielding Molded High-Current Inductors

- Operating Temperature Range -40°C to +155°C
- Ambient Temperature, Maximum 100°C
- Temperature Rise, Maximum 50°C

Specifications

Part Number	Inductance			I _{rated} (1) (Adc)	Heating (2) Current (Adc) ΔT=50°C	DCR (3) mΩ±5%	Dim D. (mm±0.5)	Dim.E (mm±0.1)
	100 kHz @ 0 Adc μH ± 10%	100 kHz, 0.1 V @ I _{rated} μH Min.	μH Typ.					
HM55A-16R30LF	0.28	0.21	0.25	40	32.8	0.72	12.8	1.48
HM55A-16R56LF	0.56	0.46	0.51	40	27.4	1.15	12.8	1.38

- Notes:
- (1) Rate current, I_{rated}, is the approximate current at which inductance will be decreased by 20% from its initial (zero DC) value.
 - (2) The heating current is the DC current, which causes the component temperature to increase by approximately 50°C. This current is determined by soldering the component on a typical application PCB, and then apply the current to the device for 30 minutes.
 - (3) DC resistance is measured at 25°C.

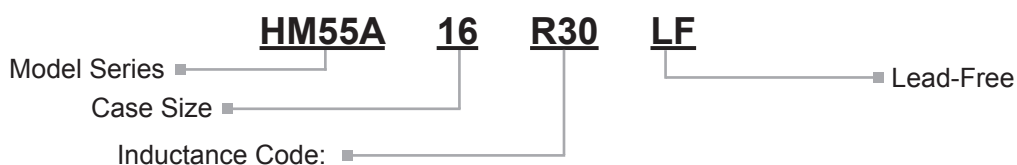
Outline Dimensions (Inch / mm)


Part Number	Dim. A	Dim. B	Dim. C
HM55A-16R30LF	.630 16.0	.394 10.0	.354 9.0
HM55A-16R56LF	.630 16.0	.394 10.0	.453 11.5

Refer to Specifications table for 'D' & 'E' dimensions of each model.

Packaging
Standard: Vacuum Tray

Case Size	Capacity Per Tray (Units)	Capacity Per Carton (Units)
16	44	660

Ordering Information


First 2 digits are significant. Last digit denotes the number of trailing zeros. For values below 10μH, "R" denotes the decimal point.

Electrical Characteristics @ 25°C

