

# MSFB39-210-001M0


## PCS-cdmaOne-IF

### ■Features

- IF filter for PCS.
- Miniature size and light weight.
- Because it is leadless type, automatic mounting is possible.

### ■Standard Frequencies


- 210.380MHz.

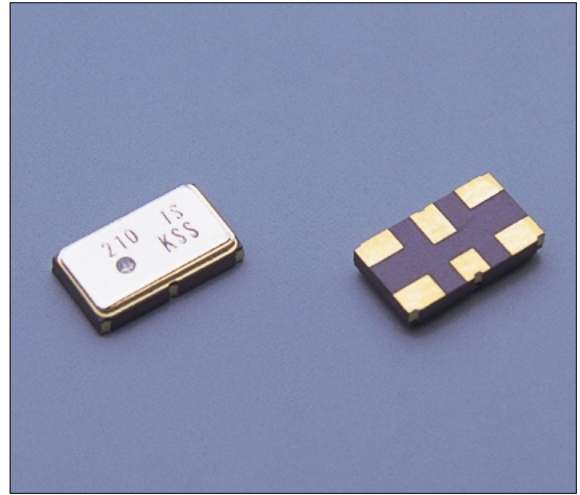

### ■Specifications

Item	Unit	Conditions	Specifications
Nominal Frequency	MHz	————	210.38
Operating Temperature Range	℃	-30~+80	————
Storage Temperature Range	℃	-40~+85	————
Pass Bandwidth	kHz	-5dB	Fo±620 MIN.
Ripple	dB	Fo±300kHz	0.7 Typical
Insertion Loss	dB	Minimum Loss	10 MAX.
Guaranteed Attenuation	dB	Fo±1.25MHz	33 MIN.
Group Delay Deviation	ns	Fo±300kHz	500 MAX.

### ■Outline

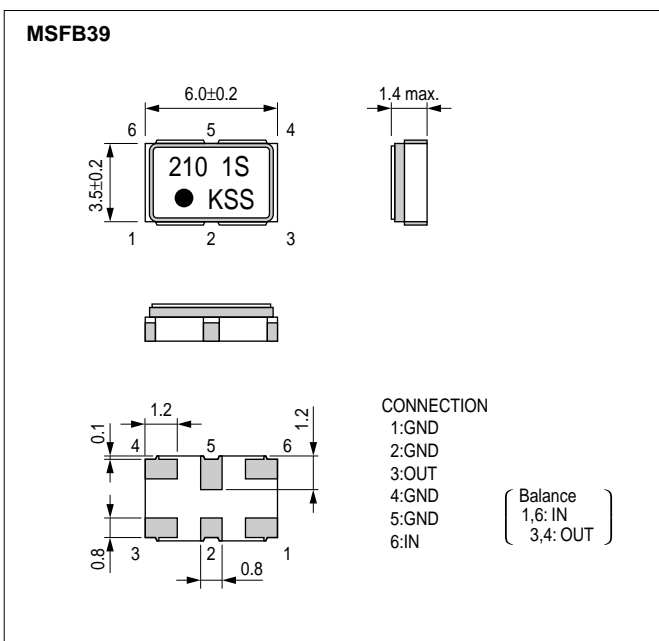

Dimensions(mm)

### ■Measurement Circuit

