

## Features


- Green colored transparency lens type
- $\phi 5\text{mm}(\text{T-13/4})$  all plastic mold type
- High efficiency led lamp
- High luminosity
- Flangeless package
- Low power consumption

## Application

- Full color displays
- Message boards

## Outline Dimensions

unit : mm

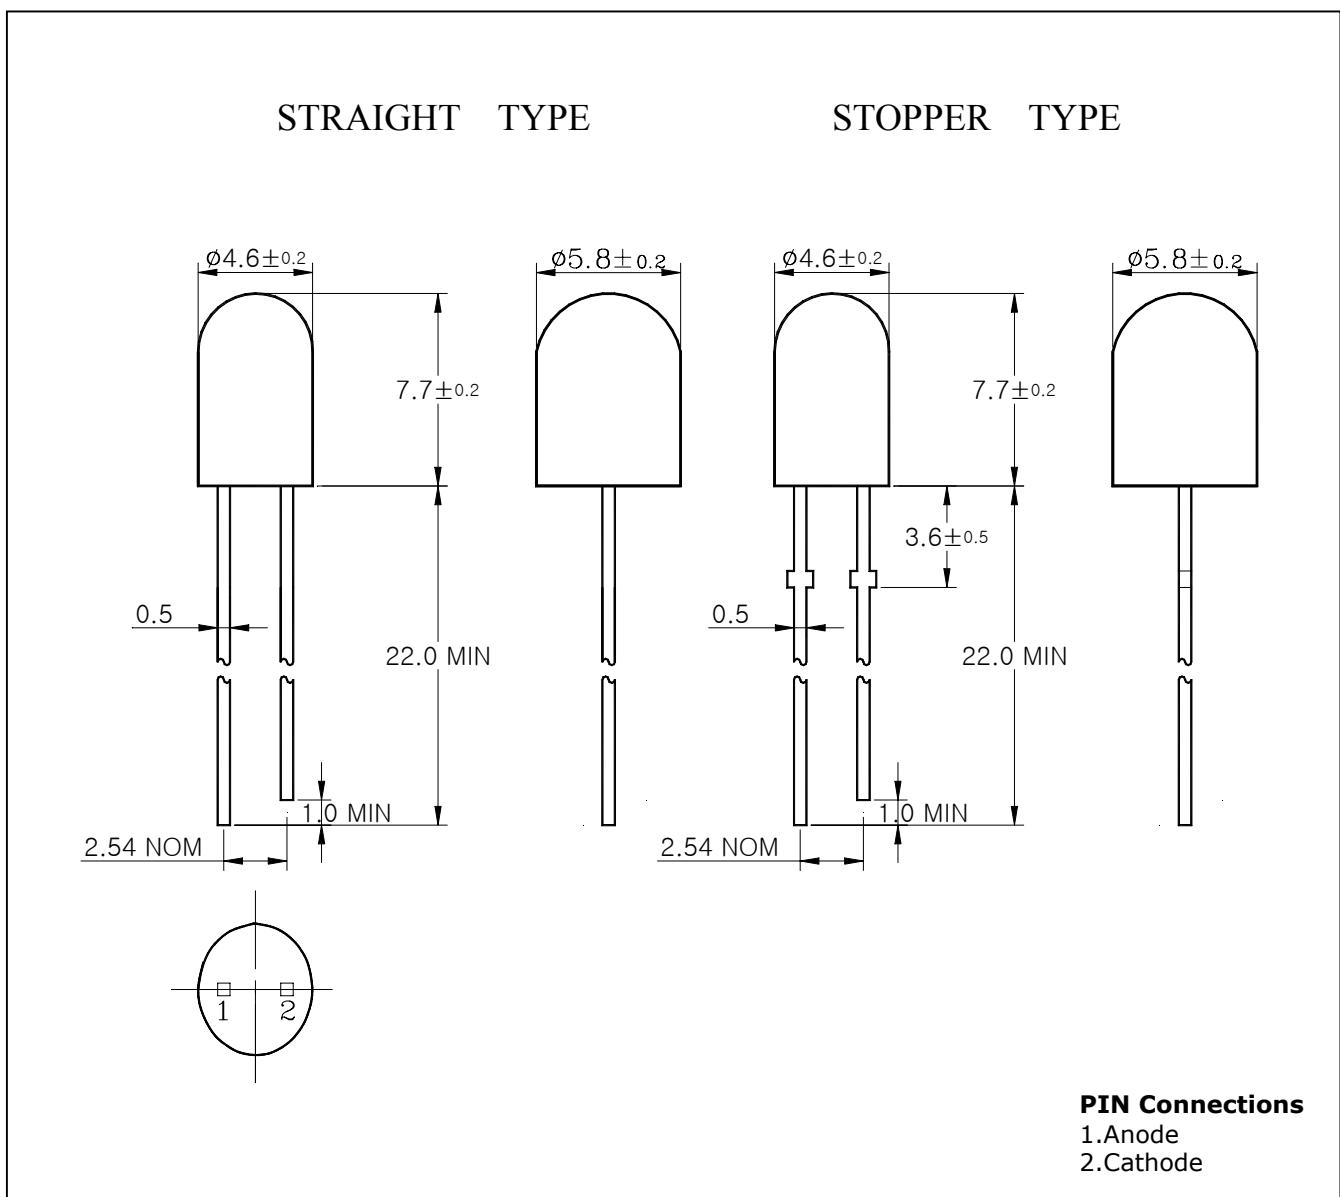

## Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Power Dissipation	P <sub>D</sub>	110	mW
Forward Current	I <sub>F</sub>	30	mA
* <sup>1</sup> Peak Forward Current	I <sub>FP</sub>	50	mA
Reverse Voltage	V <sub>R</sub>	4	V
Operating Temperature	T <sub>opr</sub>	-25~85	°C
Storage Temperature	T <sub>stg</sub>	-30~100	°C
* <sup>2</sup> Soldering Temperature	T <sub>sol</sub>	260°C for 5 seconds	

\*1.Duty ratio = 1/16, Pulse width = 0.1ms

\*2.Keep the distance more than 2.0mm from PCB to the bottom of LED package


## Electrical Characteristics

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 20mA	-	2.2	2.8	V
Luminous Intensity	I <sub>V</sub>	I <sub>F</sub> = 20mA	68	120	155	mcd
Peak Wavelength	λ <sub>P</sub>	I <sub>F</sub> = 20mA	-	570	-	nm
Spectrum Bandwidth	Δ λ	I <sub>F</sub> = 20mA	-	30	-	nm
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =4V	-	-	10	uA
* <sup>3</sup> Half angle	θ <sub>1/2</sub>	X Y	I <sub>F</sub> = 20mA	-	±17	-
					±35	deg


\*3. θ<sub>1/2</sub> is the off-axis angle where the luminous intensity is 1/2 the peak intensity

## Characteristic Diagrams


**Fig. 1  $I_F - V_F$**

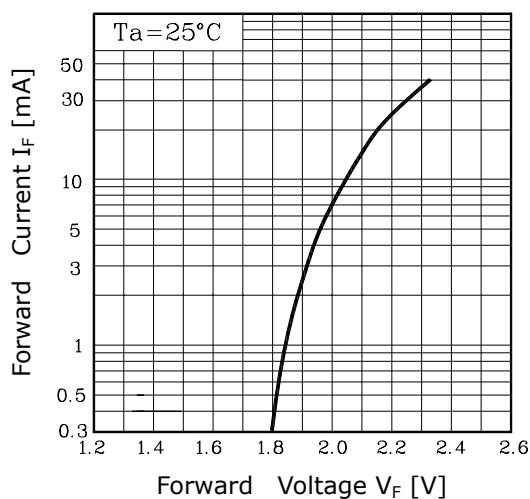


**Fig. 2  $I_V - I_F$**

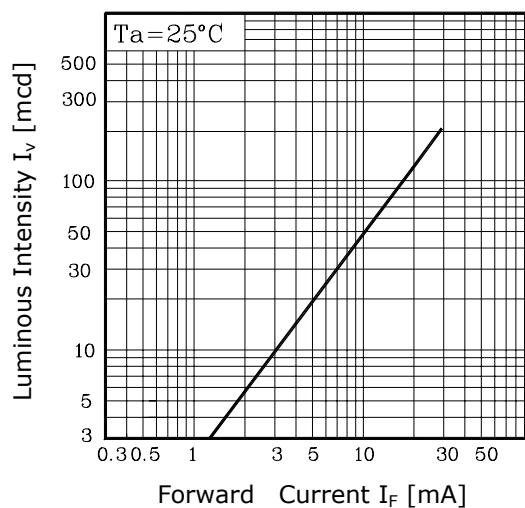


**Fig. 3  $I_F - T_a$**

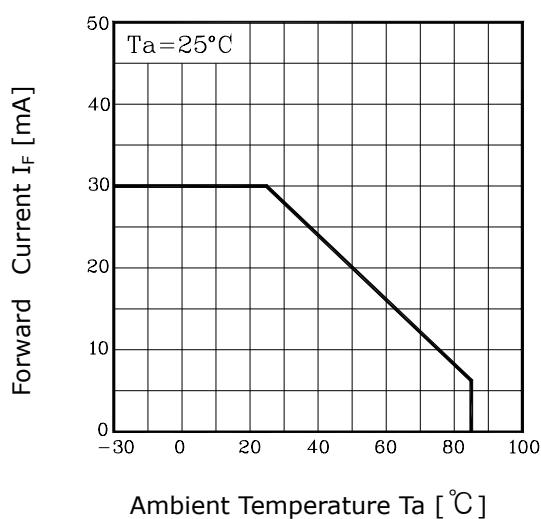

**Fig. 4 Spectrum Distribution**

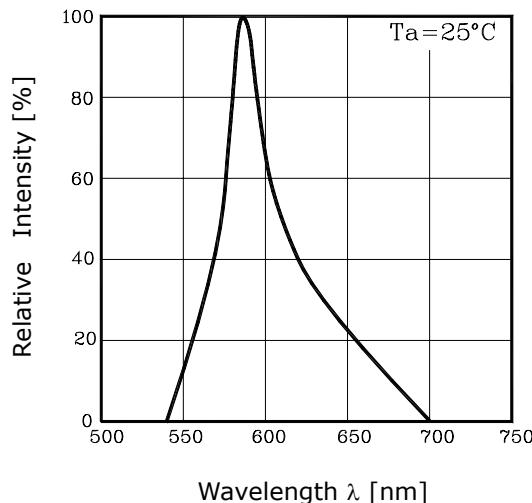

**Fig. 5-1 Radiation Diagram(X)**

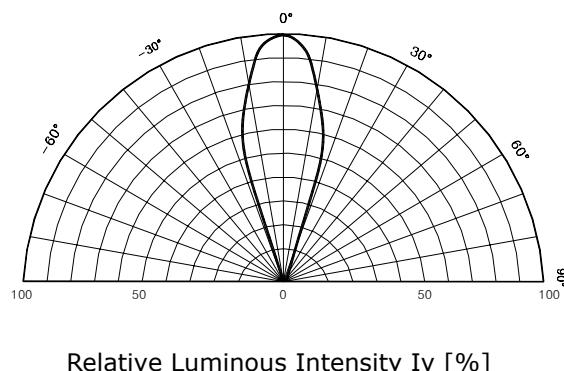

**Fig. 5-2 Radiation Diagram(Y)**

