

**VI TELEFILTER**

**Filter specification**

**TFS 167H**

**1/5**

**Measurement condition**

Ambient temperature:	23	°C
Input power level:	0	dBm
Terminating impedance: *		
Input:	348 Ω    - 7,2 pF	
Output:	348 Ω    - 7,2 pF	

**Characteristics**

**Remark:**

The reference level for the relative attenuation  $a_{rel}$  of the TFS 167H is the maximum attenuation in the pass band. The maximum attenuation in the pass band is defined as the insertion loss  $a_e$ . The nominal frequency  $f_N$  is fixed at 167,0 MHz without any tolerance or limit. The values of relative attenuation  $a_{rel}$  are guaranteed for the whole operating temperature range. The frequency shift of the filter in the operating temperature range is included in the production tolerance scheme.

<b>D a t a</b>		<b>typ. value</b>	<b>tolerance / limit</b>
<b>Insertion loss</b> (Reference level)	$a_e$	1,4 dB	max. 3,0 dB
<b>Nominal frequency</b>	$f_N$	-	167,0 MHz
<b>Pass band</b>	PB	-	$f_N \pm 75$ kHz
<b>Amplitude variation in PB</b>		0,3 dB	max. 1 dB
<b>Amplitude ripple in PB</b>	p-p	0,25 dB	max. 0,5 dB
<b>Relative attenuation</b>	$a_{rel}$		
$f_N \pm 0,4$ MHz ... $f_N \pm 0,6$ MHz		9,0 dB	min. 5 dB
$f_N \pm 0,6$ MHz ... $f_N \pm 20,0$ MHz		18,0 dB	min. 10 dB
$f_N - 20$ MHz ... $f_N - 137$ MHz		56 dB	min. 33 dB
$f_N + 20$ MHz ... $f_N + 103$ MHz		43 dB	min. 33 dB
$f_N + 103$ MHz ... $f_N + 105$ MHz		65 dB	min. 40 dB
$f_N + 105$ MHz ... $f_N + 833$ MHz		46 dB	min. 33 dB
<b>Absolute group delay in PB</b>		1,75 μs	max. 2,0 μs
<b>Group delay ripple in PB</b>		210 ns	max. 300 ns
<b>Intermodulation ratio</b> For two - 20dBm input signals			
@ $f_N + 0,800$ MHz and $f_N + 1,600$ MHz		110 dB	min. 100 dB
@ $f_N - 0,800$ MHz and $f_N - 1,600$ MHz		110 dB	min. 100 dB
<b>Input Return loss</b>		18,0 dB	min. 15,0 dB
<b>Output Return loss</b>		19,0 dB	min. 10,0 dB
<b>Input power level</b>		-	max. 22 dBm
<b>Temperature coefficient of frequency <math>Tc_f</math> **</b>		-0,046 ppm/K <sup>2</sup>	-
<b>Frequency inversion temperature</b>		20 °C	-
<b>Operating temperature range</b>		-	- 5 °C .. + 85 °C
<b>Storage temperature range</b>		-	- 40 °C.. + 90 °C

\*) The terminating impedances depend on parasitics and q-values of matching elements and the board used, and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

\*\*)  $\Delta f_c(\text{Hz}) = Tc_f(\text{ppm/K}^2) \times (T - T_0)^2 \times f_{CAT}(\text{MHz})$ .



**generated:** \_\_\_\_\_

**checked / approved:** \_\_\_\_\_

**Tele Filter GmbH**  
**Potsdamer Straße 18**  
**D 14 513 TELTOW / Germany**  
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**  
**E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)**



VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**Filter characteristic**

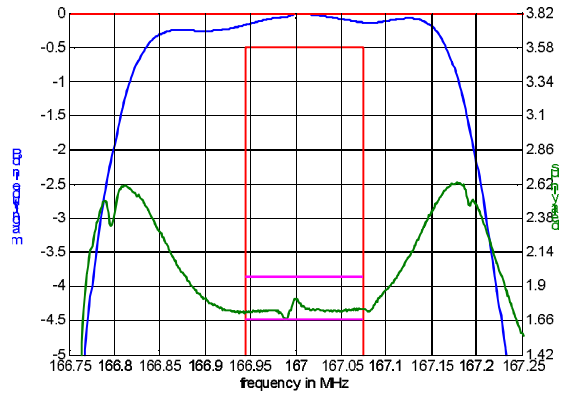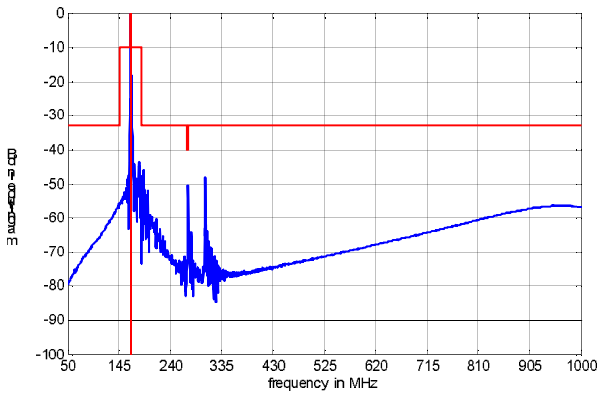


**Construction and pin connection**

(All dimensions in mm)

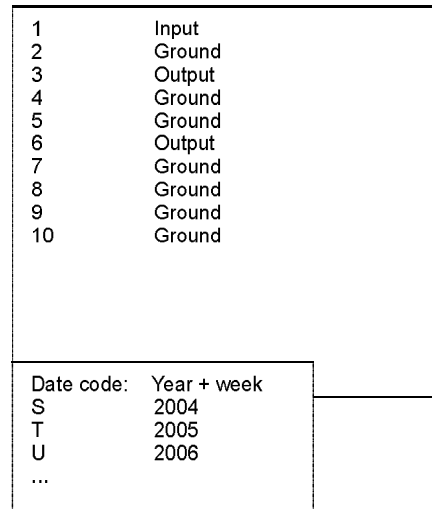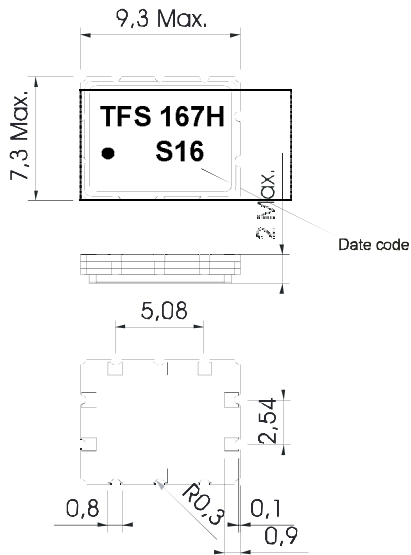

**50 Ω Test circuit**

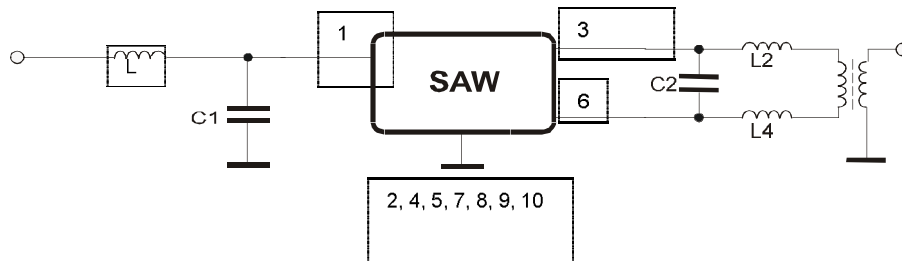

Tele Filter GmbH  
 Potsdamer Straße 18  
 D 14 513 TELTOW / Germany  
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30  
 E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**VI TELEFILTER**

**Filter specification**

**TFS 167H**

**3/5**

**Stability characteristics**

After the following tests the filter shall meet the whole specification:

1. Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;  
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;  
DIN IEC 68 T2 - 6
3. Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles  
DIN IEC 68 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: twice max.;  
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;
5. ESD MIL-STD-883E using coupling network of ISO 10605 and EN 6100-4-2  
HBM:500V; MM:500V;


**Packing**

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;  
tape type II, embossed carrier tape with top cover tape on the upper side;

max. pieces of filters peer reel:	3000
reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm


**Tape (all dimensions in mm)**

- W : 16,00 ± 0,3
- Po : 4,00 ± 0,1
- Do : 1,50 +0,1/-0
- E : 1,75 ± 0,10
- F : 7,50 ± 0,10
- G(min) : 0,60
- P2 : 2,00 ± 0,1
- P1 : 12,00 ± 0,1
- D1(min) : 1,50
- Ao : 7,60 ± 0,10
- Bo : 9,60 ± 0,10
- Ct : 13,5

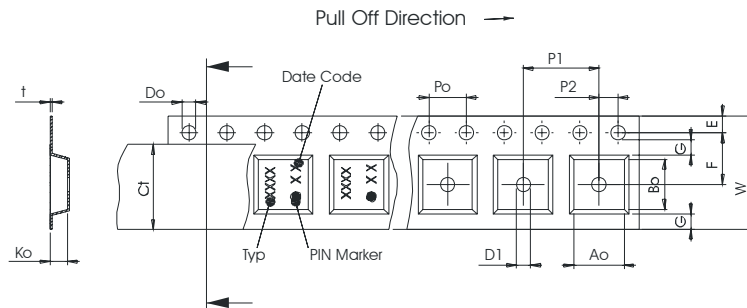

**Reel (all dimensions in mm)**

- A : 330
- W1 : 18,0
- W2(max) : 22,0
- N(min) : 100
- C : 13,0

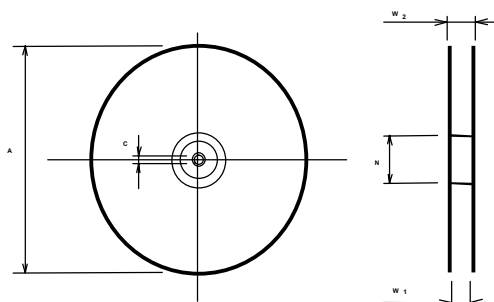

The minimum bending radius is 45 mm.

**Tele Filter GmbH**  
**Potsdamer Straße 18**  
**D 14 513 TELTOW / Germany**  
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**  
**E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**Air reflow temperature conditions**

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

**Chip-mount air reflow profile**

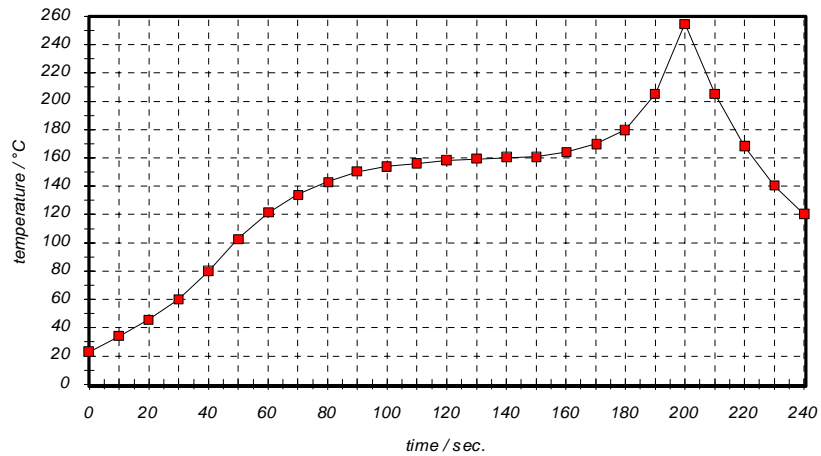


Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

Tele Filter GmbH  
 Potsdamer Straße 18  
 D 14 513 TELTOW / Germany  
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30  
 E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

**VI TELEFILTER****Filter specification****TFS 167H****5/5****History**

<b>Version</b>	<b>Reason of Changes</b>	<b>Name</b>	<b>Date</b>
1.0	generate preliminary specification	Roizengaft	18.11.2003
1.1	generation of filter specification add terminating impedance add filter characteristic change circuit test change packing (tape and reel)	Noack	16.04.2004
1.2	correction terminating impedance add typical value for amplitude ripple amplitude variation change packing (tape) change temperature coefficient	Noack	18.06.2004
1.3	change limit of relative attenuation from 30 dB to 33dB update typical value and filter characteristic	Noack	16.07.2004
1.4	add ESD stability characteristics change drawing of packing (tape and reel)	Noack	19.08.2004

---

**Tele Filter GmbH**  
**Potsdamer Straße 18**  
**D 14 513 TELTOW / Germany**  
**Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30**  
**E-Mail: [tft@telefilter.com](mailto:tft@telefilter.com)**

---

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.