


UGB10FCT AND UGB10GCT

ULTRAFAST SOFT RECOVERY RECTIFIER

Reverse Voltage - 300-400 Volts **Forward Current - 10.0 Amperes**

TO-263AB

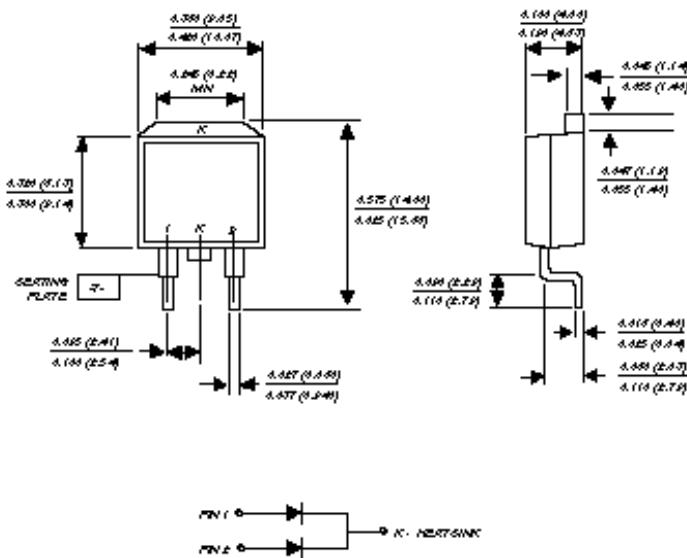

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- ◆ Ideally suited for free wheeling diode power factor correction applications
- ◆ Soft recovery characteristics
- ◆ Excellent high temperature switching
- ◆ Optimized to reduce switching losses
- ◆ High temperature soldering in accordance with CECC 802 / Reflow guaranteed
- ◆ Glass passivated chip junction



MECHANICAL DATA

Case: JEDEC TO-263AB molded plastic body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Mounting Torque: 5 in. - lbs. max.

Weight: 0.08 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	UGB10FCT	UGB10GCT	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	300	400	Volts
Working peak reverse voltage	V _{RWM}	225	300	Volts
Maximum RMS voltage	V _{RMS}	210	280	Volts
Maximum DC blocking voltage	V _{DC}	300	400	Volts
Maximum average forward rectified current at T _c =100°C	I _(AV)	10		Amps
Peak forward surge current				
8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I _{FSM}	60A		Amps
Maximum instantaneous forward voltage per leg I _F = 5A	T _J =25°C T _J =150°C	V _F	1.30 1.05	Volts
Maximum reverse leakage current at working peak reverse voltage	T _J =25°C T _J =100°C	I _R	10 200	µA
Maximum Reverse recovery time per leg at I _F =1.0A, dI/dt=100A/µs, V _R =30V, I _{rr} =0.1 I _{RM}	t _{rr}	50		ns
Maximum reverse recovery time per leg at I _F =0.5A, I _R =1.0A, I _{rr} =0.25A	t _{rr}	35		ns
Maximum reverse recovery current per leg at I _F =5A, dI/dt=50A/µs, V _R =30V	T _c =100°C	I _{RM}	3.0	Amps
Maximum stored charge per leg I _F =2A, dI/dt=20A/µs, V _R =30V, I _{rr} =0.1 I _{RM}		Q _{rr}	50	nC
Typical thermal resistance from junction to case per leg	R _{θJC}	4.5		°C/W
Operating junction and storage temperature range	T _J , T _{STG}	-40 to +150		°C

NOTE: (1) Pulse test: 300µs pulse width, 1% duty cycle

NOTICE: Advanced product information is subject to change without notice

RATINGS AND CHARACTERISTIC CURVES UGB10FCT AND UGB10GCT

