

- ◆ N-Channel Power MOS FET
- ◆ DMOS Structure
- ◆ Low On-State Resistance : 0.035Ω (max)
- ◆ Ultra High-Speed Switching
- ◆ SOP - 8 Package

- Applications
 - Notebook PCs
 - Cellular and portable phones
 - On - board power supplies
 - Li - ion battery systems


■ General Description

The XP131A1235SR is a N-Channel Power MOS FET with low on-state resistance and ultra high-speed switching characteristics. Because high-speed switching is possible, the IC can be efficiently set thereby saving energy. The small SOP-8 package makes high density mounting possible.

■ Features

- Low on-state resistance** : $R_{ds(on)} = 0.035\Omega$ ($V_{gs} = 4.5V$)
 $R_{ds(on)} = 0.048\Omega$ ($V_{gs} = 2.5V$)
- Ultra high-speed switching**
- Operational Voltage** : 2.5V
- High density mounting** : SOP - 8


■ Pin Configuration

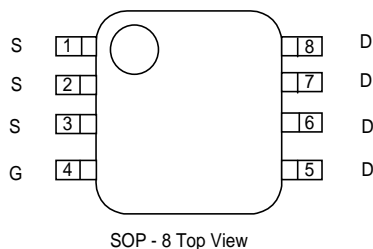

■ Pin Assignment

PIN NUMBER	PIN NAME	FUNCTION
1 - 3	S	Source
4	G	Gate
5 - 8	D	Drain

■ Equivalent Circuit

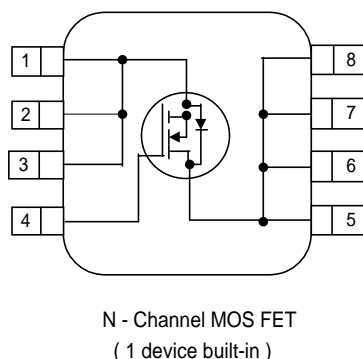

■ Absolute Maximum Ratings

$T_a = 25^\circ\text{C}$			
PARAMETER	SYMBOL	RATINGS	UNITS
Drain - Source Voltage	V_{dss}	20	V
Gate - Source Voltage	V_{gss}	± 12	V
Drain Current (DC)	I_d	7	A
Drain Current (Pulse)	I_{dp}	30	A
Reverse Drain Current	I_{dr}	7	A
Continuous Channel Power Dissipation (note)	P_d	2.5	W
Channel Temperature	T_{ch}	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to 150	$^\circ\text{C}$

(note) : When implemented on a glass epoxy PCB

Electrical Characteristics

DC characteristics

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Drain Cut-off Current	Idss	Vds = 20 , Vgs = 0V			10	μA
Gate-Source Leakage Current	Igss	Vgs = ± 12 , Vds = 0V			± 1	μA
Gate-Source Cut-off Voltage	Vgs (off)	Id = 1mA , Vds = 10V	0.5		1.2	V
Drain-Source On-state Resistance (note)	Rds (on)	Id = 4A , Vgs = 4.5V		0.025	0.035	Ω
		Id = 4A , Vgs = 2.5V		0.035	0.048	Ω
Forward Transfer Admittance (note)	Yfs	Id = 4A , Vds = 10V		16		S
Body Drain Diode Forward Voltage	Vf	If = 7A , Vgs = 0V		0.85	1.1	V

(note) : Effective during pulse test.

Dynamic characteristics

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Capacitance	Ciss	Vds = 10V , Vgs = 0V f = 1 MHz		760		pF
Output Capacitance	Coss			430		pF
Feedback Capacitance	Crss			200		pF

Switching characteristics

Ta=25°C


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Turn-on Delay Time	td (on)	Vgs = 5V , Id = 4A Vdd = 10V		10		ns
Rise Time	tr			20		ns
Turn-off Delay Time	td (off)				55	ns
Fall Time	tf				15	ns

Thermal characteristics


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Thermal Resistance (channel - surroundings)	Rth (ch - a)	Implement on a glass epoxy resin PCB		50		°C / W

Electrical Characteristics


Drain Current vs. Drain/Source Voltage

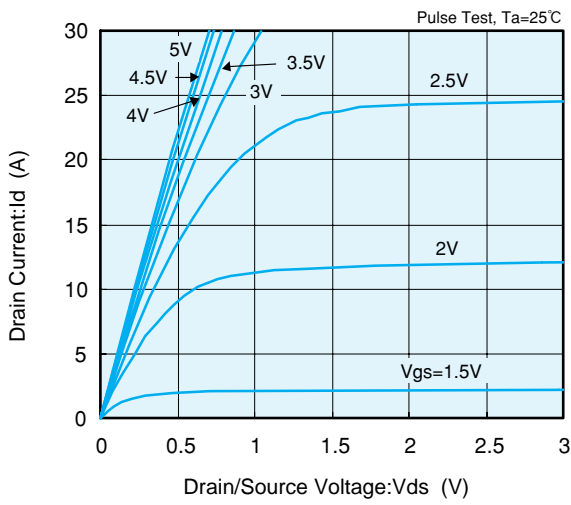


Drain Current vs. Gate/Source Voltage

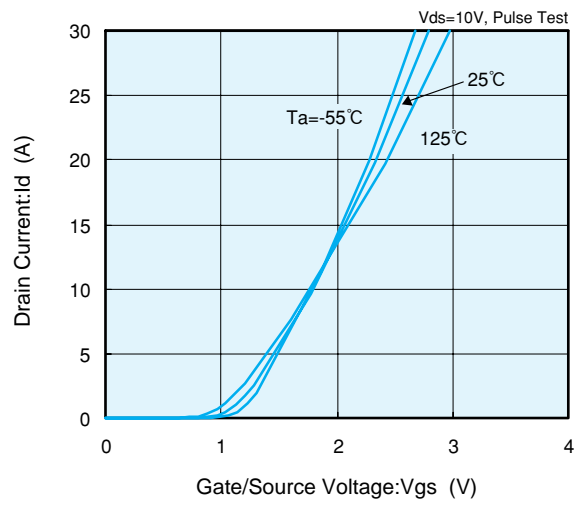


Drain/Source On-State Resistance

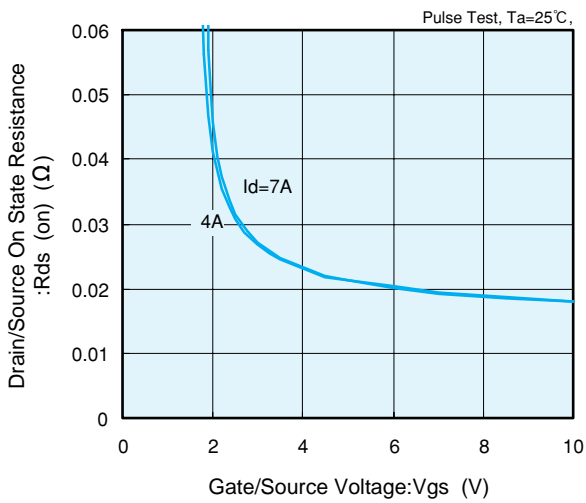


Drain/Source On-State Resistance

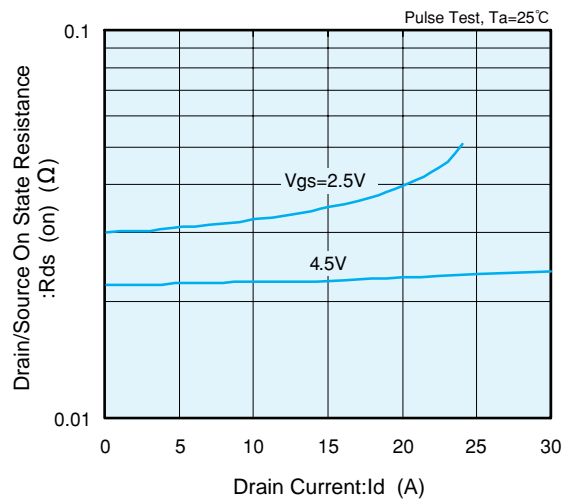

Drain/Source On-State Resistance vs. Ambient Temperature

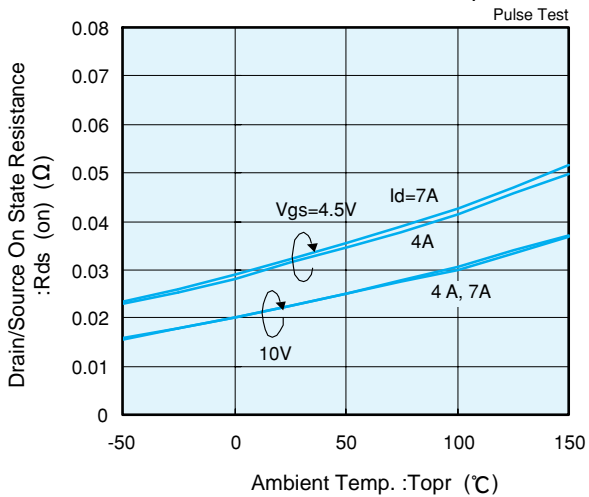


Gate/Source Cut-Off Voltage Variance vs. Ambient Temperature

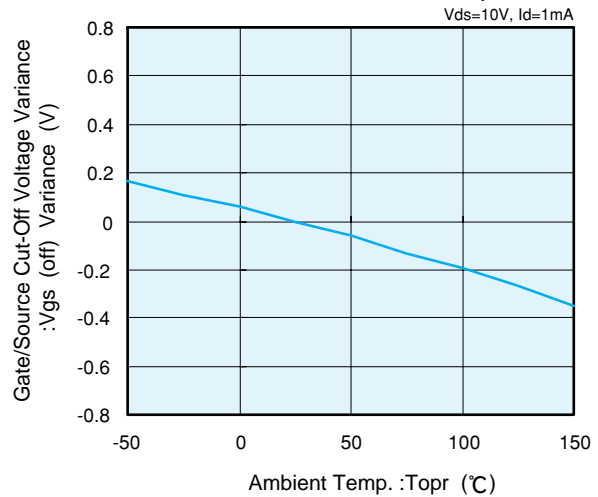


Electrical Characteristics


Drain/Source Voltage vs. Capacitance

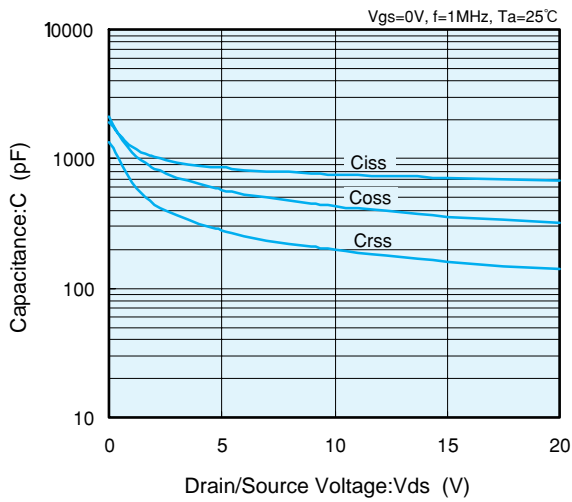


Switching Time vs. Drain Current

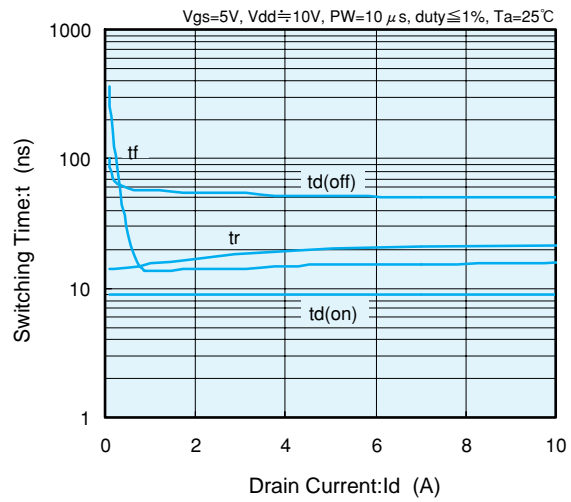


Gate/Source Voltage vs. Gate Charge

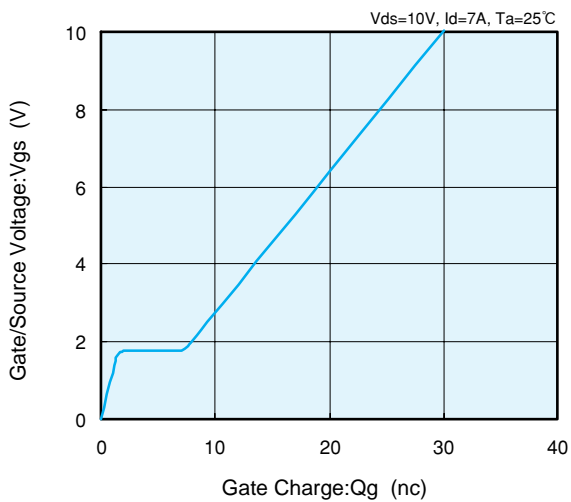

Reverse Drain Current vs. Source/Drain Voltage

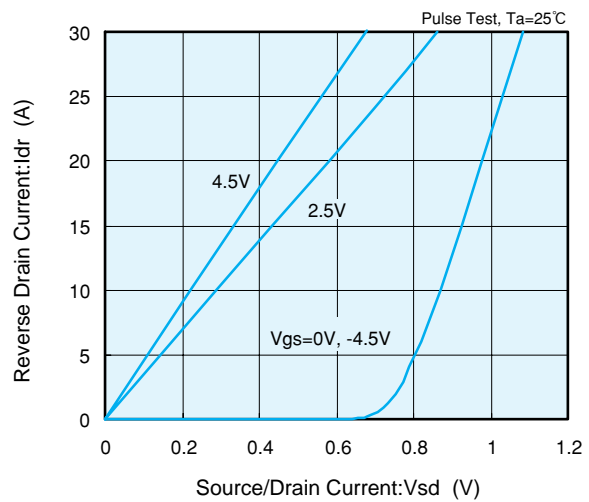

Standardized Transition Thermal Resistance vs. Pulse Width

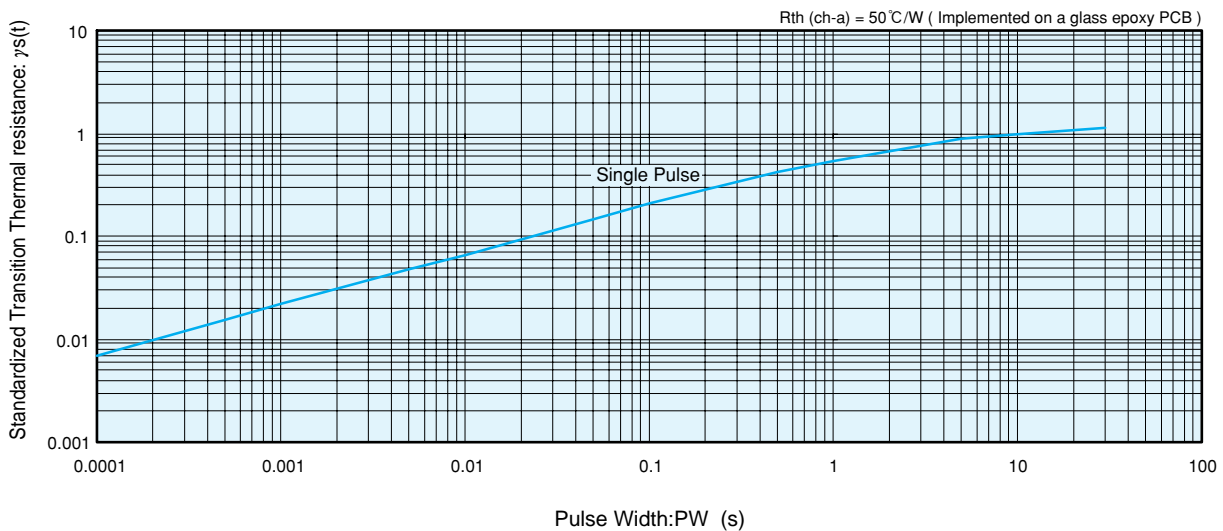

7