



TMX W339

SAW Passband Filter – REMOTE CONTROL – RF

Preliminary Specification (Rev-1)

■ Technical overview	P01
■ Matching Network for 50Ω / 50Ω Configuration	P01
■ Typical Response (Measurement)	P02
■ Package Drawing	P02

TMX W339

SAW Passband Filter - REMOTE CONTROL - RF

Preliminary Specification (Rev 1)


May 10th, 2005

Electrical Parameters		Unit	Minimum	Typical ⁽¹⁾	Maximum
Source Impedance (single ended)		Ω	-	50 ⁽²⁾	-
Load Impedance (single ended)		Ω	-	50 ⁽²⁾	-
Center Frequency f_0		MHz	-	866	-
Absolute Attenuation					
770 MHz to 780 MHz		dB	40	49	-
815 MHz to 825 MHz		dB	40	49	-
837.5 MHz to 847.5 MHz		dB	30	38	-
Insertion Loss within 862 MHz ~ 870 MHz		dB	-	3.0	4.5
Ripple within 862 MHz ~ 870 MHz		dB	-	0.8	2.1
Package type & size					
Length x Width		mm ²	-	3.0 x 3.0	-
Height		Mm	-	1.2	1.4
Pin Out					
Input	2	Output	6		
Case Ground	1, 3, 4, 5, 7, 8	To Be Grounded	1, 3, 4, 5, 7, 8		

Notes :

- (1) Typical values are nominal performances at room temperature
- (2) No external matching circuit is required

50 Ω / 50 Ω CONFIGURATION

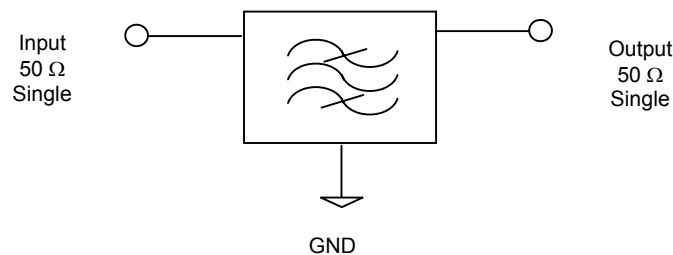

Maximum Ratings


Rating	Unit	Value
Operating Temperature Range	-10 to +60	$^{\circ}\text{C}$
Storage Temperature Range	-40 to +85	$^{\circ}\text{C}$
DC permissive Voltage	3	V
Maximum RF Power	10	dBm

TMX W339

SAW Passband Filter - REMOTE CONTROL - RF
 Preliminary Specification (Rev 1)

May 10th, 2005

TYPICAL S21 RESPONSE

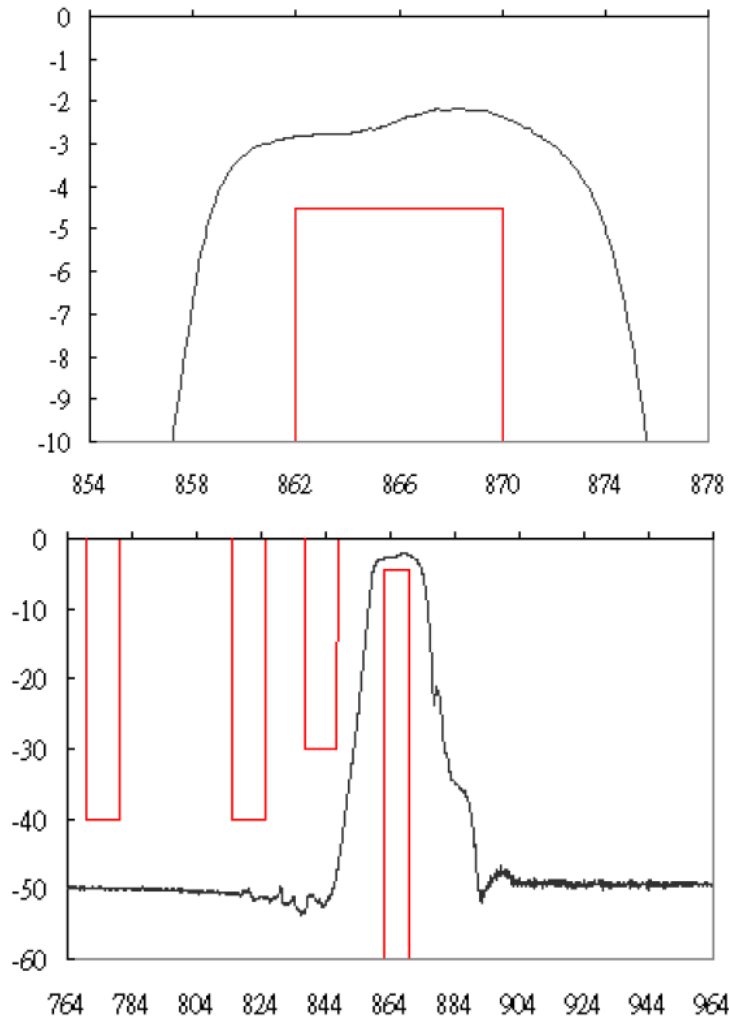

PACKAGE DRAWING

