


Type: ERH2826/MS

Product Description


- 38.3 \times 30.3mm Max.(L \times W), 25.5mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.




♦ Feature

- Max. Operating frequency 500kHz. Max Operating Power 35.0W(500kHz)
- · Ideally used in Switching regulator, EL inverter.
- RoHS Compliance

Dimensions (mm)

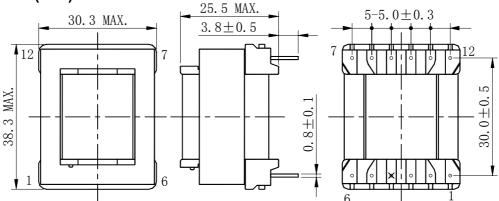

◆ Schematics (Bottom)



"S" indicates winding start.

♦ Specification

| Sample No. | Inductance (1-3) 100kHz/1V | Leakage Inductance (1-3) 100kHz/1V | Hi-pot Winding-winding (50/60Hz) |
|------------|-------------------------------|--|--|
| 03YPD101 | 460µH ± 30% | 2.4 μ H Max. | AC 3000Vrms/1min. |