



High Precision Resistor Arrays

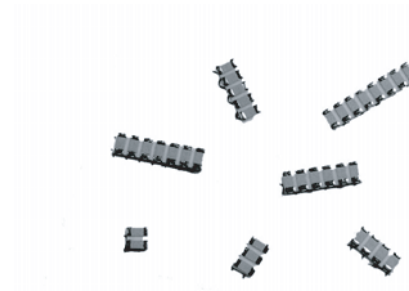

PRA arrays can be used in most applications requiring a matched pair (or set) of resistor elements. The networks provide 1 ppm/°C TCR tracking, a ratio tolerance as tight as 0.01 % and outstanding stability. They are available in 1 mm, 1.35 mm and 1.82 mm pitch.

DIMENSIONS

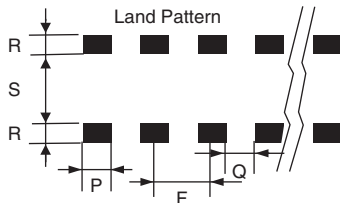

DIM.	PRA100		PRA 135		PRA 182	
	mm	mil	mm	mil	mm	mil
A	1.6 ^{+0.2} / _{-0.1}	63	1.85 ^{+0.2} / _{-0.1}	72	3.0 ^{+0.2} / _{-0.1}	118
B	0.4 ^{+0.2} / _{-0.2}	16	0.4 ^{+0.2} / _{-0.2}	16	0.4 ^{+0.2} / _{-0.2}	16
C	0.65 ^{+0.15} / _{-0.15}	25.5	1.05 ^{+0.15} / _{-0.15}	41	1.3 ^{+0.35} / _{-0.15}	51
D	0.25	10	0.25	10	0.25	10
E ⁽¹⁾	E = (N F) ± 0.2 mm		E = (N x F) ± 8 mil			
F	1	40	1.35	53.1	1.82	72
G	0.38 ^{+0.2} / ₋₀	15	0.38 ^{+0.2} / ₋₀	15	0.38 ^{+0.2} / ₋₀	15
P	0.7	27.5	1.05	41.3	1.52	59.8
Q	0.3	12	0.3	12	0.3	12
R	1	40	1	40	1	40
S	0.6	23.5	0.8	31.5	1.8	70.8

Notes:

⁽¹⁾ E depends on number of resistors

* Pb containing terminations are not RoHS compliant, exemptions may apply

FEATURES


- High stability passivated nichrome resistive layer 0.02 % on ratio, 1000 h at Pn at + 70 °C
- Tight TCR (10 ppm/°C) and TCR tracking (to 1 ppm/°C)
- Very low noise < 35 dB and voltage coefficient < 0.01 ppm/V
- Ratio tolerance to 0.01 % (R ≥ 200R)
- Pre-tinned terminations over nickel barrier
- Lead (Pb)-free available




TYPICAL PERFORMANCE

	ABS	TRACKING
TCR	10 ppm/°C	2 ppm/°C
	ABS	RATIO
TOL	0.1 %	0.05 %



I: Independent resistors

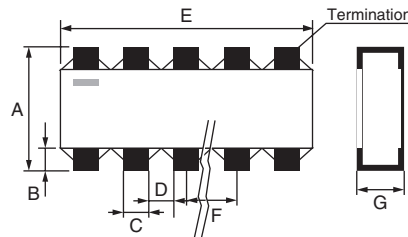

Electrical diagram

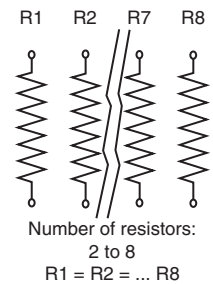

C: One common point N resistors

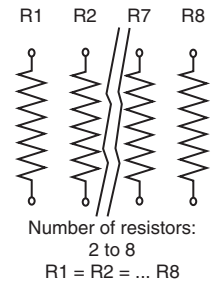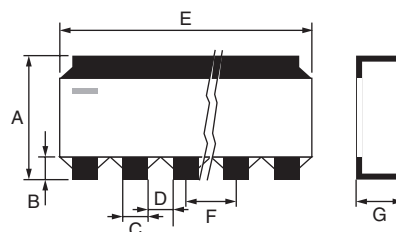



GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: P0505Y1003BBT0933

P	R	A	1	0	0	I	4	-	5	K	6	2	B	W	B	T	2	8
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

GLOBAL MODEL	CONFIG.	NUMBERS OF RESISTORS	VALUE	ABS. TOL.	RATIO TOL.	TERMINATION	PACKAGING	OPTION
PRA100 PRA135 PRA182	I: Independent C: Common	2 to 8	Decimal R or K	B = 0.1 % D = 0.5 %	B = 0.1 % W = 0.05 % P = 0.02 % L = 0.01 %	B: SnPb over nickel barrier N: SnAg over nickel barrier G: Gold over nickel barrier	Blank = Waffle Pack T ⁽¹⁾ = Tape and Reel	Leave blank if no option

B: Lead bearing version
N and G: Lead (Pb)-free/
RoHS version

Historical Part Number example: P 0505 Y 1003 B B TR R0933 e2

CNW	1368
GLOBAL MODEL	REFERENCE

Historical Part Number example: P 0505 Y 1003 B B TR R0933 e2

PRA100	I	4	5K62	0.1 %	0.05 %	TR	R0028
HISTORICAL MODEL	CONFIG.	NUMBERS OF RESISTORS	OHMIC VALUE	ABS. TOL.	RATIO TOL.	PACKAGING	OPTION

Note:

(1) Tape and Reel only available for maximum 5 resistors in the network

STANDARD ELECTRICAL SPECIFICATIONS			
TEST		SPECIFICATIONS	CONDITION
Resistance range:	PRA 100	100 Ω to 200 kΩ	
	PRA 135	100 Ω to 300 kΩ	
	PRA 182	100 Ω to 1 MΩ	
Tolerance:	Absolute	± 0.5 % to ± 0.1 %	
	Ratio	0.1 %, 0.05 %, 0.02 %, 0.01 % (R ≥ 200 R)	
TCR:	Absolute	± 10 ppm/°C	- 40 °C + 125 °C
	Ratio	2 ppm/°C (1 ppm/°C on request)	- 40 °C + 125 °C
Power rating:	PRA 100	100 mW per resistor	at + 70 °C
	PRA 135	100 mW per resistor	at + 70 °C
	PRA 182	100 mW per resistor	at + 70 °C
Operating temperature range ⁽²⁾		- 55 °C to + 155 °C	
Noise		≤ - 35 dB	
Voltage coefficient		≤ 0.01 ppm/V	
Limiting voltage:	PRA 100	35 V	
	PRA 135	75 V	
	PRA 182	100 V	

Note:

(2) For temperature up to 200 °C, please consult factory

MECHANICAL SPECIFICATIONS	
Substrate	Alumina
Technology	Thin film
Film	Nickel chromium with mineral passivation
Terminations	B type: SnPb over nickel barrier
	N type: SnAg over nickel barrier
	G type: Gold over nickel barrier


SPECIAL FEATURES

Resistance values can be different on a given network (R_{max}/R_{min} as high as 300). Tooling charges might be required depending on the ohmic values in the same network. Please, consult VISHAY SFERNICE for ohmic values, tolerances and also temperature coefficient (e.g. ± 1 ppm/ $^{\circ}\text{C}$) outside the standard range.

PACKAGING

Several types of packaging are available: waffle-pack and tape and reel.

POWER RATING

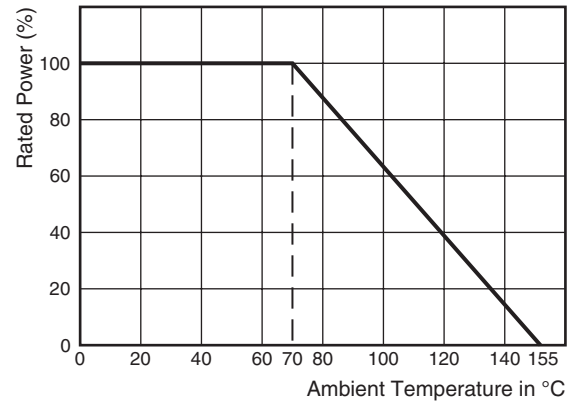

MARKING

On the primary package, printed information includes VISHAY S.A. trademark series and model, schematic number of resistors, ohmic value, absolute tolerance, ratio tolerance, type of termination: B tinned over nickel barrier.

PERFORMANCE			
TESTS	CONDITIONS CECC REQUIREMENTS	DRIFTS	
		ABSOLUTE PER (Typical Values)	RATIO
Overload	2.5 $U_n/2$ s	0.05 % R_n + 0.05 Ω	0.01 % R_n
Climatic sequences	- 55 $^{\circ}\text{C}$ + 155 $^{\circ}\text{C}/5$ moisture cycles	0.1 % R_n + 0.05 Ω	0.01 % R_n
Thermal shock	- 55 $^{\circ}\text{C}$ + 155 $^{\circ}\text{C}/5$ cycles 30'	0.05 % R_n + 0.05 Ω	0.01 % R_n
Load life	1000 h/ P_n at + 70 $^{\circ}\text{C}$	0.1 % R_n + 0.05 Ω	0.02 % R_n
Resistance to solder heat	260 $^{\circ}\text{C}/10$ s	0.05 % R_n + 0.05 Ω	0.01 % R_n
Moisture resistance	0.01 P_n at + 40 $^{\circ}\text{C}$ 93 % RH	0.1 % R_n + 0.05 Ω	0.01 % R_n
High temperature storage	1000 h/no load at + 155 $^{\circ}\text{C}$	0.1 % R_n + 0.05 Ω	0.02 % R_n

Note:

R_n : nominal resistance



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.