




CONNOR-WINFIELD CORPORATION

AURORA, IL. 60505
 PHONE (630) 851-4722
 FAX (630) 851-5040

OSCILLATOR

SPECIFICATIONS	RTC623		
Frequency Range	32.768 KHz		
Frequency Calibration	± 20 ppm @25°C		
Frequency Stability	± 180 ppm		
	(Inclusive of operating temperature range, input voltage change, load change, shock and vibration)		
Temperature Range	-40°C to +85°C		
Output	Waveform	4000B series CMOS Squarewave	
	Load	15pF	
	Voltage	Voh	Vdd -0.5V Minimum
		Vol	Vss +0.05V Maximum
	Current	Ioh	-600uA Typical
		Iol	600uA Typical
	Duty Cycle	40/60 Maximum Measured at the 50% level	
Rise/Fall Time	750nS Maximum at 3Vdc		
	250nS Maximum at 5Vdc		
Start Up Time	10mS Maximum		
Aging	± 5 ppm/year		
Supply Voltage	5Vdc to 3Vdc $\pm 10\%$		
	2.70Vdc Minimum, 5.50Vdc Maximum		
Supply Current	8 uA Typical, 25 uA Maximum at 3Vdc		
	65 uA Typical, 125 uA Maximum at 5Vdc		
Package	All metal, hermetically sealed, metal package		

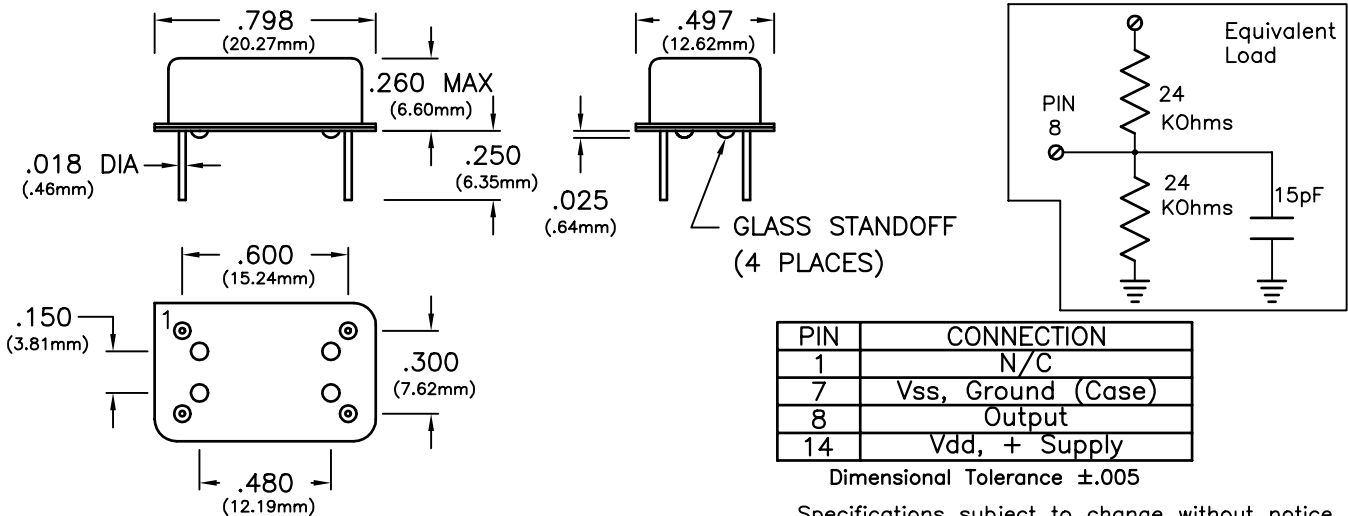

BULLETIN #: CM014
 PAGE 1 OF 1

REV: 00
 DATE: 7/2/96

ISSUED BY: _____