


1. Mechanical Dimensions:

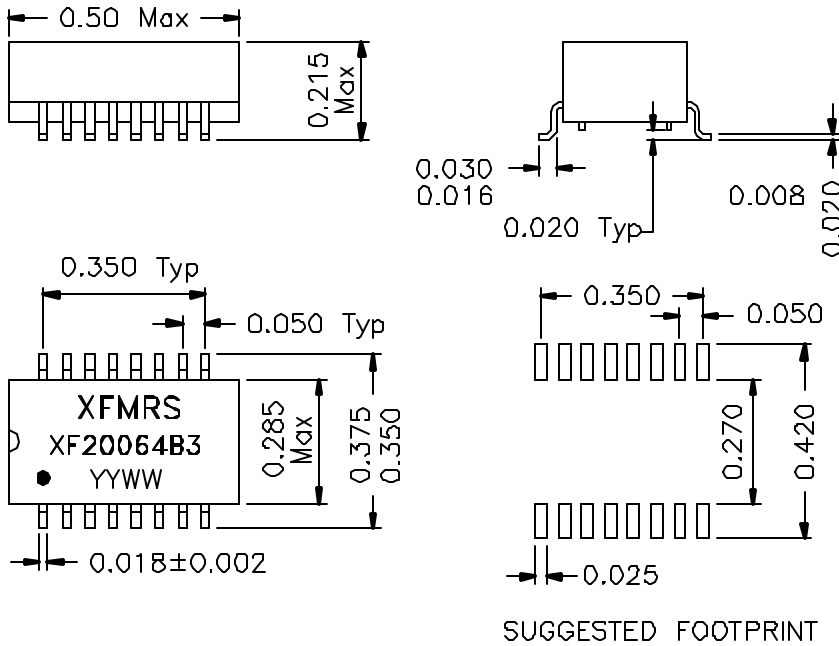

3. Electrical Specifications: @25°C

PRI/SEC Isolation: 1500Vrms

Turns Ratio: (1-2-3):(16-15-14) 1CT:1CT±2%

Turns Ratio: (6-7-8):(11-10-9) 1CT:2.5CT±2%

PRI OCL: Pins 1-3 200uH Min. 100KHz 50mV


PRI OCL: Pins 6-8 35uH Min. 100KHz 50mV

PRI LL: 0.40uH Max @100KHz 50mV (Short Sec)

PRI DCR: 0.50 ohms Max

PRI/SEC Cw/w: 15pF Max @100KHz 50mV

2. Schematics:

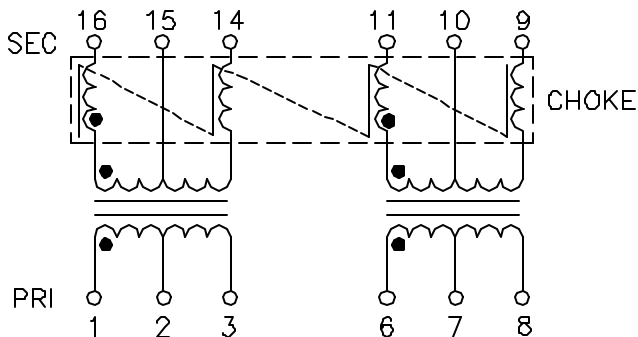

DOC. REV A/2

XFMRS Inc	Title: 10 BASE T Magnetics		
	UNLESS OTHERWISE SPECIFIED	P/N: XF20064B3	REV. A
TOLERANCES:	DWN.	廖玉坤	Mar-23-00
.xxx ±0.010	CHK.	李清儿	Mar-23-00
Dimensions in INCH	APP.	Buddy Woods	May-22-00
SCALE 2.5:1 SHT 1 OF 1			