



1. Mechanical Dimensions:

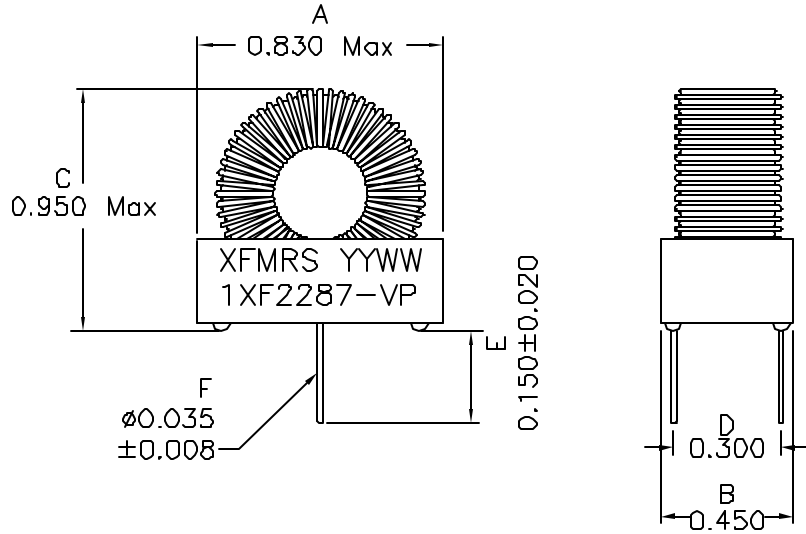

2. Schematic:



3. Electrical Specifications:

Inductance: 22.8uH±20% @1.0KHz 1.0V, 0Adc
 Rated Current: 4.9Adc
 Max Etop: 23.3 V-uSec
 DCR: 0.036 Ohms Typ

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/3

PROPRIETARY Document is the property of XFMR5 Group & is not allowed to be duplicated without authorization.

XFMR5 Inc www.XFMR5.com	Title: INDUCTOR		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: 1XF2287-VP		REV. A
	DWN.	Juan Mao	Jun-14-06
SHEET 1 OF 1	CHK.	YK Liao	Jun-14-06
	APP.	Joe Huff	Jun-14-06