




**Snubber Capacitors
Polypropylene**

**Tubular
Wrap and Fill**

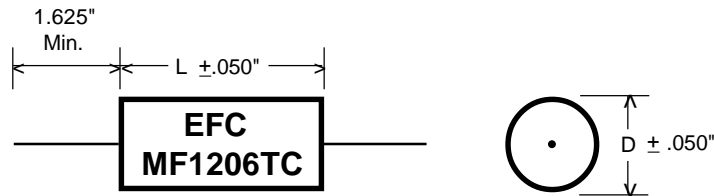

DIMENSIONS and RATINGS

| CAP. μF | 1000VDC/350VAC MF1206TC-3 | | 1250VDC/400VAC MF1206TC-3 | | 1600VDC/500VAC MF1206TC-3 | | 2000VDC/560VAC MF1206TC-3 | |
|---------------|------------------------------|--------------|------------------------------|--------------|------------------------------|--------------|------------------------------|--------------|
| | D | L | D | L | D | L | D | L |
| | inches (mm) | inches (mm) | inches (mm) | inches (mm) | inches (mm) | inches (mm) | inches (mm) | inches (mm) |
| 0.001 | 0.210 (5.4) | 0.750 (19.1) | 0.240 (6.1) | 0.750 (19.1) | 0.310 (7.9) | 0.750 (19.1) | 0.250 (6.3) | 0.750 (19.1) |
| 0.0012 | 0.230 (5.9) | 0.750 (19.1) | 0.260 (6.6) | 0.750 (19.1) | 0.330 (8.5) | 0.750 (19.1) | 0.260 (6.6) | 0.750 (19.1) |
| 0.0015 | 0.260 (6.5) | 0.750 (19.1) | 0.290 (7.3) | 0.750 (19.1) | 0.360 (9.2) | 0.750 (19.1) | 0.280 (7.1) | 0.750 (19.1) |
| 0.0022 | 0.310 (8.0) | 0.750 (19.1) | 0.340 (8.7) | 0.750 (19.1) | 0.260 (6.5) | 0.968 (24.6) | 0.320 (8.2) | 0.968 (24.6) |
| 0.0027 | 0.340 (8.7) | 0.750 (19.1) | 0.240 (6.1) | 0.968 (24.6) | 0.280 (7.1) | 0.968 (24.6) | 0.350 (8.8) | 0.968 (24.6) |
| 0.0033 | 0.380 (9.7) | 0.750 (19.1) | 0.260 (6.7) | 0.968 (24.6) | 0.320 (8.0) | 0.968 (24.6) | 0.380 (9.6) | 0.968 (24.6) |
| 0.0039 | 0.240 (6.1) | 0.968 (24.6) | 0.290 (7.4) | 0.968 (24.6) | 0.340 (8.6) | 0.968 (24.6) | 0.400 (10.3) | 0.968 (24.6) |
| 0.0047 | 0.260 (6.6) | 0.968 (24.6) | 0.320 (8.0) | 0.968 (24.6) | 0.380 (9.5) | 0.968 (24.6) | 0.440 (11.1) | 0.968 (24.6) |
| 0.0056 | 0.280 (7.2) | 0.968 (24.6) | 0.340 (8.7) | 0.968 (24.6) | 0.410 (10.3) | 0.968 (24.6) | 0.470 (12.0) | 0.968 (24.6) |
| 0.0068 | 0.310 (7.9) | 0.968 (24.6) | 0.370 (9.4) | 0.968 (24.6) | 0.450 (11.5) | 0.968 (24.6) | 0.510 (13.1) | 0.968 (24.6) |
| 0.0082 | 0.340 (8.8) | 0.968 (24.6) | 0.410 (10.4) | 0.968 (24.6) | 0.490 (12.5) | 0.968 (24.6) | 0.480 (12.1) | 1.190 (30.2) |
| 0.01 | 0.380 (9.6) | 0.968 (24.6) | 0.430 (10.8) | 0.968 (24.6) | 0.470 (11.8) | 0.968 (24.6) | 0.520 (13.2) | 1.190 (30.2) |
| 0.012 | 0.410 (10.4) | 0.968 (24.6) | 0.460 (11.7) | 0.968 (24.6) | 0.510 (12.8) | 0.968 (24.6) | 0.570 (14.4) | 1.190 (30.2) |
| 0.015 | 0.460 (11.6) | 0.968 (24.6) | 0.470 (11.9) | 1.190 (30.2) | 0.560 (14.2) | 1.190 (30.2) | 0.630 (15.9) | 1.190 (30.2) |
| 0.018 | 0.500 (12.8) | 0.968 (24.6) | 0.520 (13.1) | 1.190 (30.2) | 0.610 (15.4) | 1.190 (30.2) | | |
| 0.022 | 0.480 (12.1) | 1.190 (30.2) | 0.570 (14.4) | 1.190 (30.2) | | | | |
| 0.027 | 0.530 (13.3) | 1.190 (30.2) | 0.620 (15.8) | 1.190 (30.2) | | | | |
| 0.033 | 0.580 (14.7) | 1.190 (30.2) | | | | | | |
| 0.039 | 0.630 (15.9) | 1.190 (30.2) | | | | | | |

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.