



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date: 2004/07/30

Product Name: SAW Filter 171MHz

TST Parts No.:TA0181A

Customer Parts No.:_____

Company:_____
Division:_____
Approved by :_____
Date:_____

Checked by:_____ Asin Lin

Approval by:_____ Francis Chen

Date:_____ 2004/07/30



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 171 MHz

MODEL NO.: TA0181A

REV. NO.:3

A. MAXIMUM RATING:

1. Input Power Level: 0 dB_m
2. DC voltage: 10 V
3. Operating Temperature: -10°C to +50°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:



Characteristics	Specification	Note
Center frequency F_c (MHz)	171	1
I.L. (Within $F_c \pm 4$ MHz)	6.5 Max.	
Amplitude Ripple, A.R. (Within $F_c \pm 4$ MHz) (dB)	2.1 Max.	
Attenuation:(Reference level from 0 dB) (dB)		
$F_c - 100$ MHz to -38.8MHz (dB)	50 Min.	1
$F_c + 38.8$ MHz to + 100MHz (dB)	42 Min.	
Impedance at F_c ; Input $Z_{IN} = R_{IN} // C_{IN}$	390 Ω // 300 pF	2
Output $Z_{OUT} = R_{OUT} // C_{OUT}$	1164 Ω // 374 pF	2

Note1. The standard definitions is in JIS C 6703


Note2.

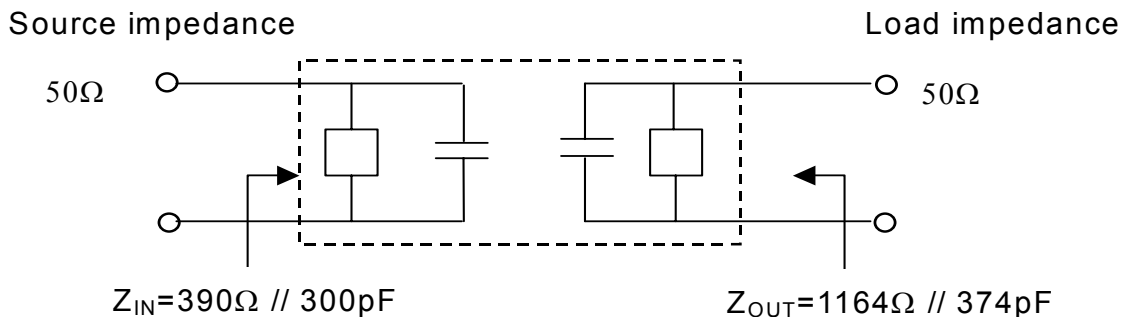

C. Frequency Characteristics :

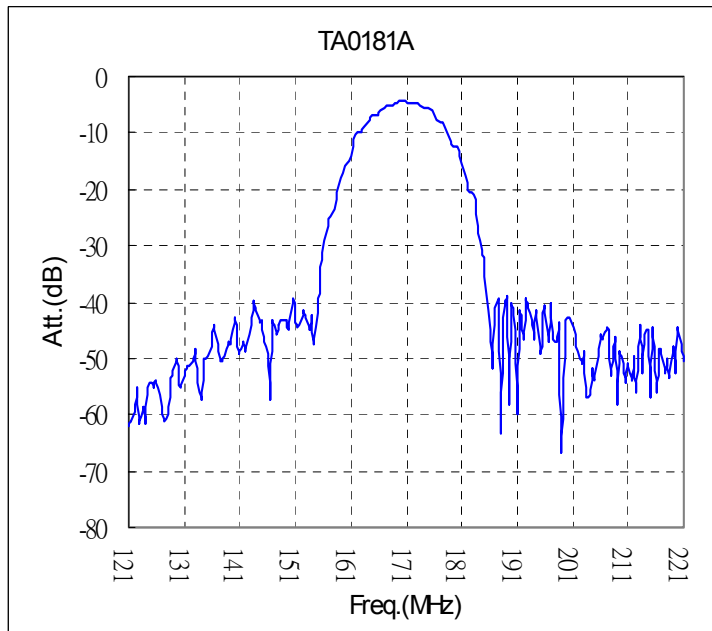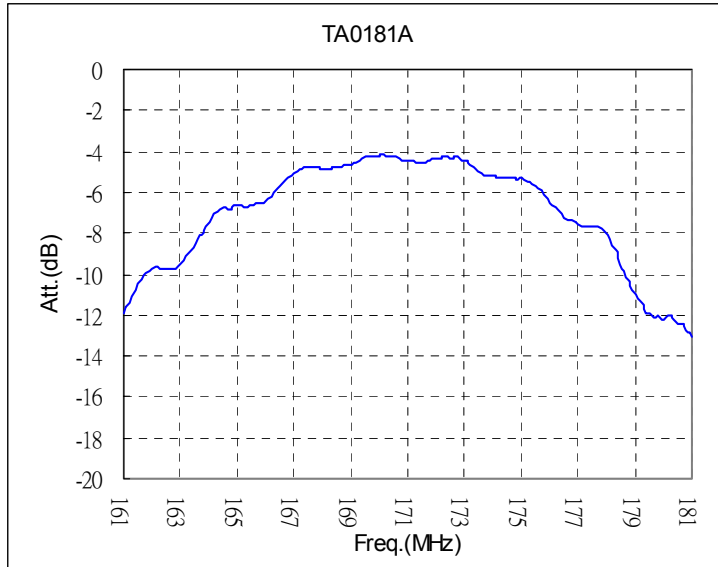


D. MEASUREMENT CIRCUIT:

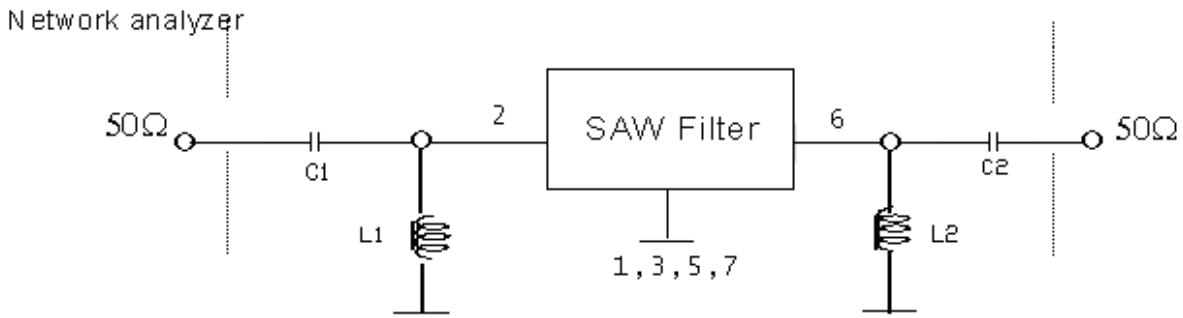


$C1 = 10 \text{ pF}$ $L1 = 37 \text{ nH}$
 $C2 = 8 \text{ pF}$ $L2 = 40 \text{ nH}$

E. OUTLINE DRAWING:

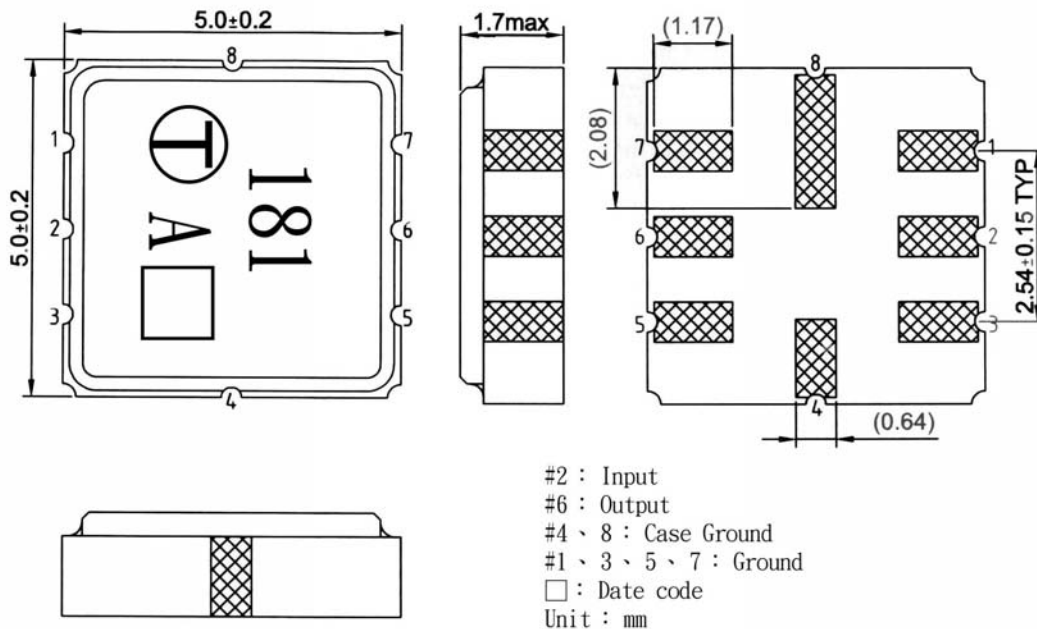

F. PACKING:

1. REEL DIMENSION

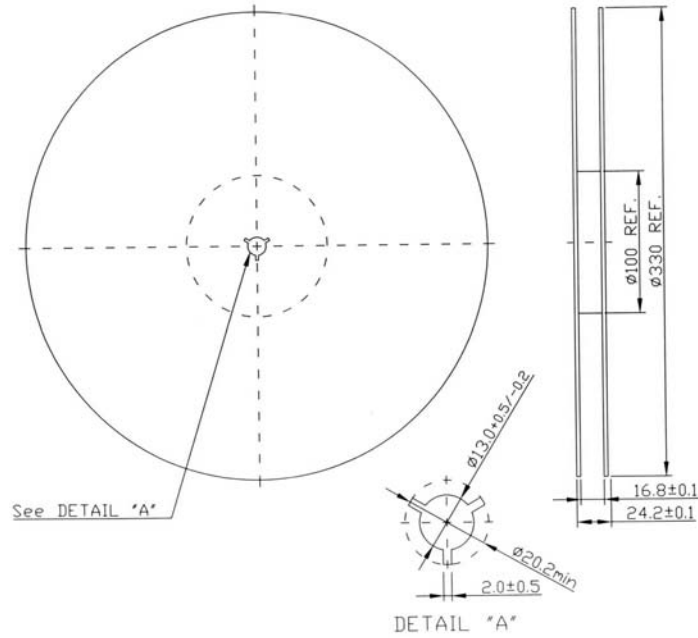

2. TAPE DIMENSION

