



**FKC1 to FKC5**  
70° Cable Outlet

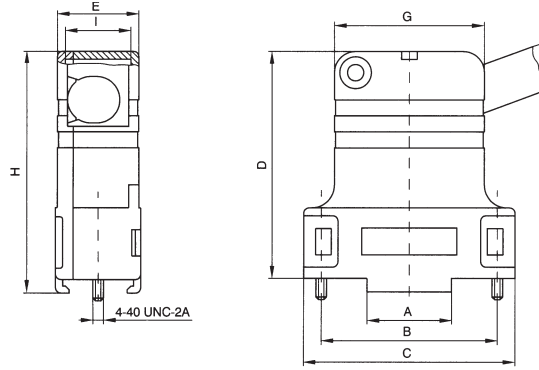


Part Number	A	B	C	D	E	∅F min.	∅F max.	G	H	I
FKC1	10.0	25.0	31.8	39.3	15.8	3.5	8.6	20.0	41.6	11.6
FKC2	16.0	33.3	41.2	45.5	16.3	3.5	8.6	28.4	47.8	11.6
FKC3	28.0	47.0	54.9	52.5	16.3	4.0	12.0	42.1	54.8	11.6
FKC4	44.4	63.5	71.4	55.0	18.7	6.0	13.0	58.6	57.8	14.0
FKC5	42.0	61.1	69.0	55.0	19.5	6.0	14.0	56.2	57.8	15.0

**FKC1G to FKC5G**  
180° Cable Outlet

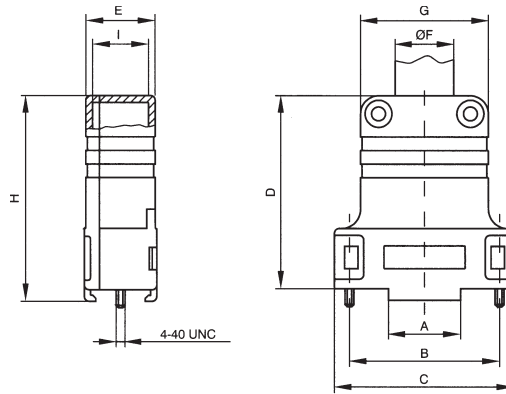


Part Number	A	B	C	D	E	∅F min.	∅F max.	G	H	I
FKC1G	10.0	25.0	31.8	39.2	17.6	4.0	11.0	20.0	41.6	13.2
FKC2G	16.0	33.3	41.2	45.5	16.3	4.0	11.0	28.4	47.8	11.6
FKC3G	28.0	47.0	54.9	52.5	16.3	4.0	12.0	42.1	54.8	11.6
FKC4G	44.4	63.5	71.4	55.0	18.7	6.0	13.0	58.6	57.8	14.0
FKC5G	42.0	61.1	69.0	55.0	19.5	6.0	14.0	56.2	57.8	15.0

**FPHGR-1 to FPHGR-5**  
Various Cable Outlets

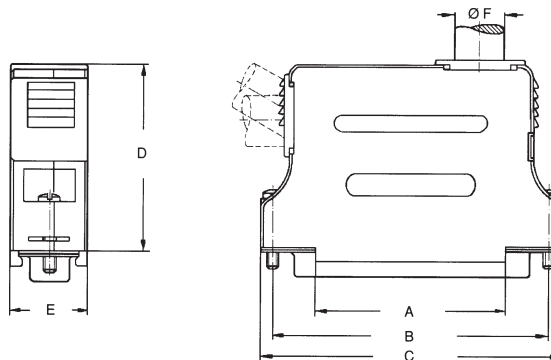

Part Number	No. of Contacts	Cable Outlet	A	B	C	D	E	∅F
FPHGR-1	9	0° / - / -	10.0	25.0	32.2	31.8	15.7	6.5
FPHGR-2	15	0° / - / -	16.1	33.3	39.2	36.9	15.7	11.2
FPHGR-3	25	0° / 60° / 90°	27.8	47.0	53.3	42.2	15.7	11.2
FPHGR-4	37	0° / 60° / 90°	44.4	63.5	69.7	42.2	15.7	11.2
FPHGR-5	50	0° / 60° / 90°	42.0	61.1	67.3	42.2	18.5	14.0


**FKH1 to FKH5**  
180° Cable Outlet

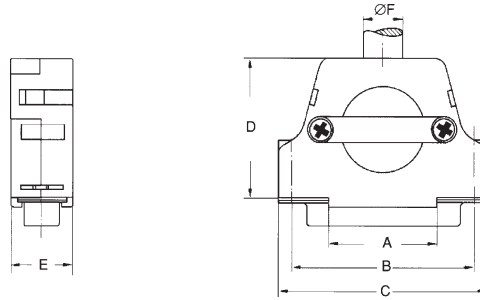

Part Number	No. of Contacts	A	B	C	D	E	ØF
FKH1	9	10.0	25.0	31.2	31.8	16.0	8.0
FKH2	15	16.1	33.3	40.0	32.0	16.0	8.0
FKH3	25	27.8	47.0	53.4	35.0	16.0	11.3
FKH4	37	44.4	63.5	70.2	41.0	16.0	11.3
FKH5	50	42.0	61.1	67.8	41.0	18.5	13.8


D-Sub (Metal Hood Variations)

**FMK1G to FMK5G**  
180° Cable Outlet

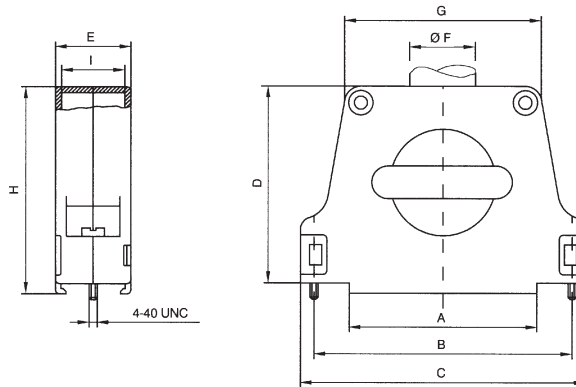

Part Number	A	B	C	D	E	ØF min.	ØF max.	G	H	I
FMK1G	15.0	25.0	31.8	39.5	15.4	3.0	9.5	20.8	42.4	12.0
FMK2G	16.0	33.3	40.3	41.0	15.4	3.0	8.5	23.3	43.5	12.0
FMK3G	28.0	47.0	54.0	45.0	15.4	3.0	8.5	31.7	47.7	12.0
FMK4G	44.5	63.5	70.2	48.0	18.5	3.0	12.0	48.2	50.4	15.0
FMK5G	42.0	61.1	67.8	48.0	18.5	3.0	12.0	45.8	50.4	15.0

**FMK1 to FMK5**  
45° Cable Outlet

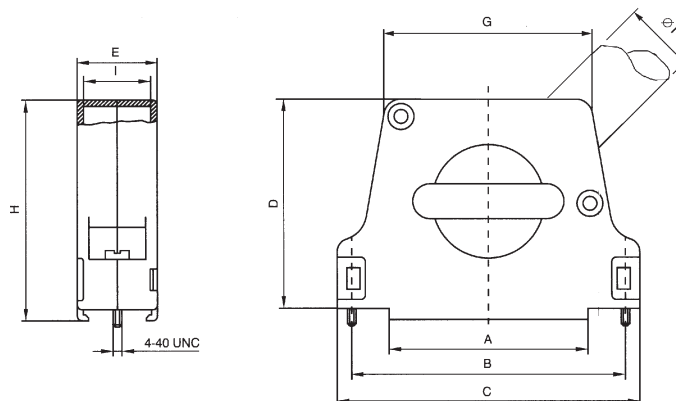

Part Number	A	B	C	D	E	ØF min.	ØF max.	G	H	I
FMK1	15.0	25.0	31.8	39.5	15.4	3.0	9.5	20.8	42.4	12.0
FMK2	16.0	33.3	40.3	41.0	15.4	3.0	8.5	23.3	43.5	12.0
FMK3	28.0	47.0	54.0	45.0	15.4	3.0	8.5	31.7	47.7	12.0
FMK4	44.5	63.5	70.2	48.0	18.5	3.0	12.0	48.2	50.4	15.0
FMK5	42.0	61.1	67.8	48.0	18.5	3.0	12.0	45.8	50.4	15.0

Standard D-Sub