

**LED DOT MATRIX**
**BL-M40X571**
**Features:**

- 106.50mm (4.0") F10.0 dot matrix LED display.
- Low current operation.
- Excellent character appearance.
- Easy mounting on P.C. Boards or sockets.
- I.C. Compatible.
- ROHS Compliance.


**Super Bright**
**Electrical-optical characteristics: (Ta=25 ) (Test Condition: IF=20mA)**

Part No		Chip			VF Unit:V		Iv TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	λ <sub>p</sub> (nm)	Typ	Max	
BL-M40A571S-XX	BL-M40B571S-XX	Hi Red	GaAlAs/GaAs,SH	660	1.85	2.20	155
BL-M40A571D-XX	BL-M40B571D-XX	Super Red	GaAlAs/GaAs,DH	660	1.85	2.20	180
BL-M40A571UR-XX	BL-M40B571UR-XX	Ultra Red	GaAlAs/GaAs,DDH	660	1.85	2.20	230
BL-M40A571E-XX	BL-M40B571E-XX	Orange	GaAsP/GaP	635	2.10	2.50	120
BL-M40A571Y-XX	BL-M40B571Y-XX	Yellow	GaAsP/GaP	585	2.10	2.50	120
BL-M40A571G-XX	BL-M40B571G-XX	Green	GaP/GaP	570	2.20	2.50	140

**Ultra Bright**
**Electrical-optical characteristics: (Ta=25 ) (Test Condition: IF=20mA)**

Part No		Chip			VF Unit:V		Iv TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	λ <sub>p</sub> (nm)	Typ	Max	
BL-M40A571UHR-XX	BL-M40B571UHR-XX	Ultra Red	AlGaInP	645	2.10	2.50	230
BL-M40A571UE-XX	BL-M40B571UE-XX	Ultra Orange	AlGaInP	630	2.10	2.50	170
BL-M40A571YO-XX	BL-M40B571YO-XX	Ultra Amber	AlGaInP	619	2.10	2.50	170
BL-M40A571UY-XX	BL-M40B571UY-XX	Ultra Yellow	AlGaInP	590	2.10	2.50	170
BL-M40A571UG-XX	BL-M40B571UG-XX	Ultra Green	AlGaInP	574	2.20	2.50	200
BL-M40A571PG-XX	BL-M40B571PG-XX	Ultra Pure Green	InGaN	525	3.80	4.50	250
BL-M40A571B-XX	BL-M40B571B-XX	Ultra Blue	InGaN	470	2.70	4.20	120
BL-M40A571W-XX	BL-M40B571W-XX	Ultra White	InGaN	/	2.70	4.20	200

--XX: Surface / Lens color :

Number	0	1	2	3	4	5
Ref Surface Color	White	Black	Gray	Red	Green	
Epoxy Color	Water clear	White diffused	Red Diffused	Green Diffused	Yellow Diffused	

**LED DOT MATRIX**
**BL-M40X571**
**Absolute maximum ratings (Ta=25 )**

Parameter	S	D	UR	E	Y	G	Unit
Forward Current $I_f$	25	25	25	25	25	30	mA
Power Dissipation $P_d$	60	60	60	60	60	65	mW
Reverse Voltage $V_R$	5	5	5	5	5	5	V
Peak Forward Current $I_{PF}$ (Duty 1/10 @1KHZ)	150	150	150	150	150	150	mA
Operation Temperature $T_{OPR}$	-40 to +80						
Storage Temperature $T_{STG}$	-40 to +85						
Lead Soldering Temperature $T_{SOL}$	Max.260±5 for 3 sec Max. (1.6mm from the base of the epoxy bulb)						

**■ Absolute maximum ratings (Ta=25°C)**


Parameter	UHR	UE	YO	UY	UG	PG	B	W	Unit
Forward Current $I_f$	30	30	30	30	30	30	30	30	mA
Power Dissipation $P_d$	75	65	65	65	75	110	120	120	mW
Reverse Voltage $V_R$	5	5	5	5	5	5	5	5	V
Peak Forward Current $I_{PF}$ (Duty 1/10 @1KHZ)	150	150	150	150	150	150	100	100	mA
Operation Temperature $T_{OPR}$	-40 to +80								
Storage Temperature $T_{STG}$	-40 to +85								
Lead Soldering Temperature $T_{SOL}$	Max.260±5 for 3 sec Max. (1.6mm from the base of the epoxy bulb)								

LED DOT MATRIX


BL-M40X571

Package configuration & Internal circuit diagram


BL-M40X571 Series

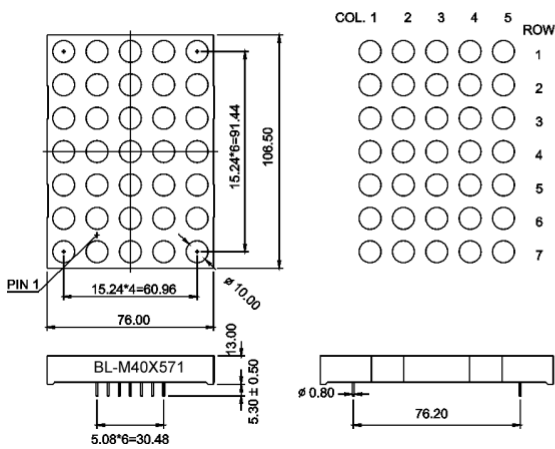

BL-M40A571

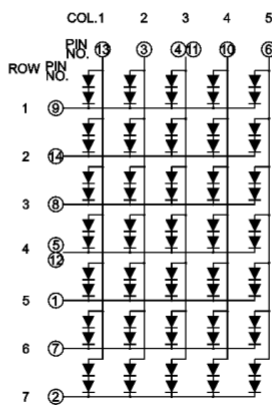

BL-M40B571

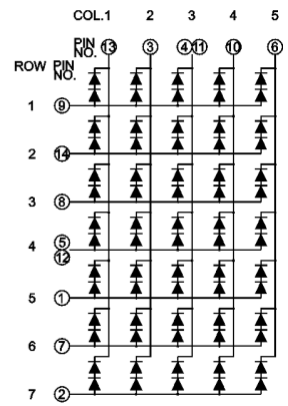


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Specifications are subject to change without notice.


## LED DOT MATRIX

BL-M40X571


### Typical electrical-optical characteristics curves:

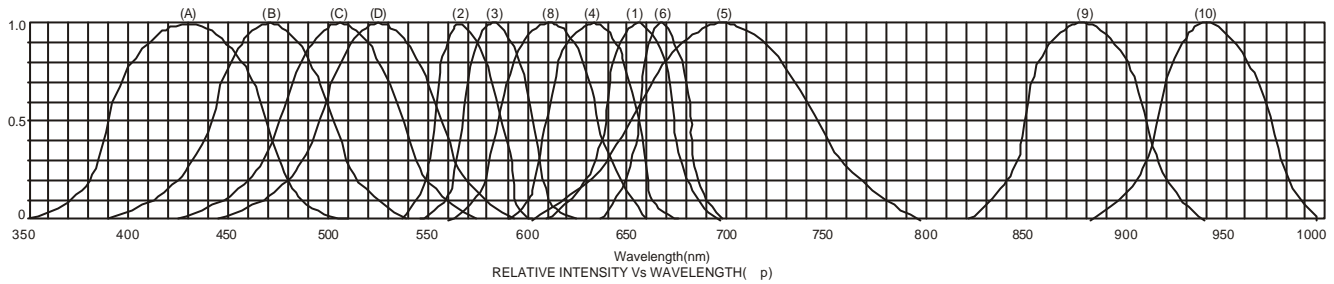


- (1) - GaAsP/GaAs 655nm/Red
- (2) - GaP 570nm/Yellow Green
- (3) - GaAsP/GaP 585nm/Yellow
- (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) - GaP 700nm/Bright Red
- (6) - GaAlAs/GaAs 660nm/Super Red
- (8) - GaAsP/GaP 610nm/Super Red
- (9) - GaAlAs 880nm
- (10) - GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) - GaN/SiC 430nm/Blue
- (B) - InGaN/SiC 470nm/Blue
- (C) - InGaN/SiC 505nm/Ultra Green
- (D) - InGaAl/SiC 525nm/Ultra Green

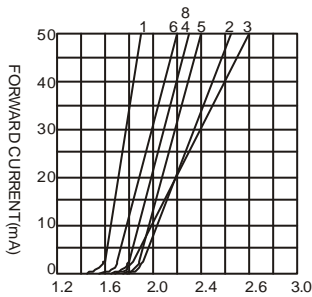


FORWARD VOLTAGE (Vf)  
FORWARD CURRENT VS.  
FORWARD VOLTAGE

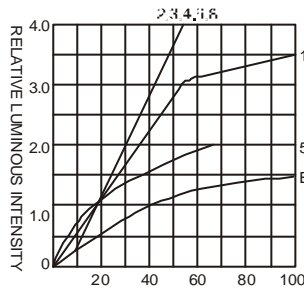


FORWARD CURRENT (mA)  
RELATIVE LUMINOUS  
INTENSITY VS. FORWARD  
CURRENT

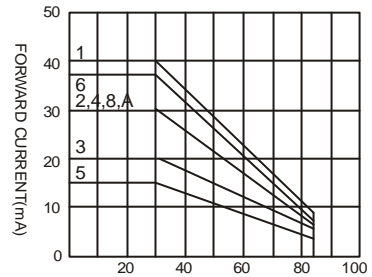


AMBIENT TEMPERATURE Ta( )  
FORWARD CURRENT VS. AMBIENT  
TEMPERATURE

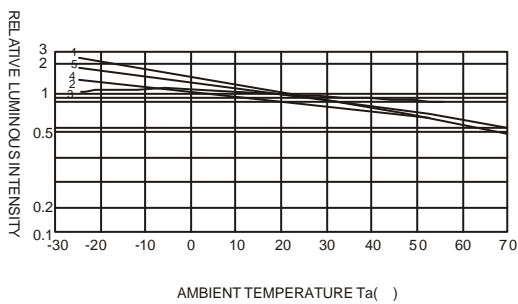

AMBIENT TEMPERATURE Ta( )

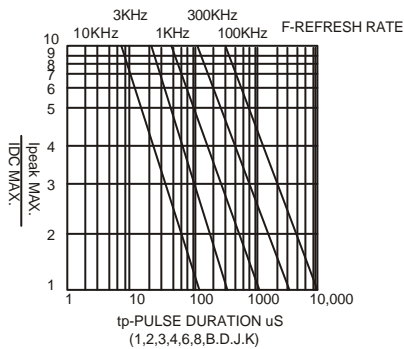

tp-PULSE DURATION μS  
(1,2,3,4,6,8,B,D,J,K)

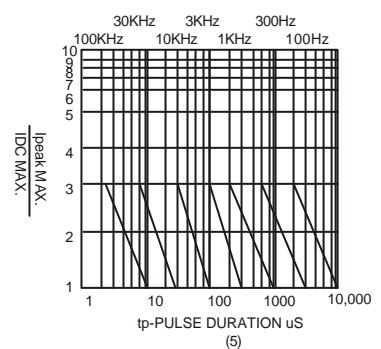

(5)

NOTE:25 free air temperature unless otherwise specified