


## 25.0A Single-Phase Bridge Rectifier

### Features

- High forward surge current capability
- Ideal for printed circuit board
- High temperature soldering guaranteed:  
260°C/10 seconds, 5 lbs (2.3kg) tension
- RoHS Compliant



TB35



### Mechanical Data

<b>Case:</b>	Molded plastic body with Metal Heat Sink
<b>Polarity:</b>	Polarity symbols marked on case
<b>Terminals:</b>	Plated 0.25" (6.35mm) lug
<b>Mounting Position:</b>	Thru hole for #10 screw, 20 in -lbs. torque max
<b>Weight:</b>	0.53 ounce, 15 grams

### Maximum Ratings & Electrical Characteristics *(T<sub>Ambient</sub>=25°C unless noted otherwise)*

Symbols	Description	TB2505	TB251	TB252	TB254	TB256	TB258	TB2510	Unit
<b>VRRM</b>	Max. recurrent peak reverse voltage	50	100	200	400	600	800	1000	V
<b>VRMS</b>	Max. RMS voltage	35	70	140	280	420	560	700	V
<b>VDC</b>	Max. DC blocking voltage	50	100	200	400	600	800	1000	V
<b>Io(AV)</b>	Max. average forward rectified current@ TC=50° C	25.0							A
<b>IFSM</b>	Peak forward surge current (JEDEC)	300							A
<b>I<sup>2</sup>t</b>	Rating for Fusing (t<8.3ms)	373							A <sup>2</sup> sec
<b>Viso</b>	Isolation Voltage from case to lugs	2500							V
<b>Cj</b>	Typical Capacitance Junction(per element)(Note 2)	300							pF
<b>TJ</b>	Operating junction temperature range	-65 to +150							° C
<b>TSTG</b>	Storage Temperature Range	-65 to +150							° C

# 25.0A SINGLE-PHASE BRIDGE RECTIFIER

## TB2505 -TB2510

Symbol	Description	TB2505	TB251	TB252	TB254	TB256	TB258	TB2510	Unit
<b>V<sub>F</sub></b>	Maximum Instantaneous Forward Voltage Drop Per Leg@12.5 A	1.1							V
<b>I<sub>R</sub></b>	Maximum DC Reverse Current Rated DC Blocking Voltage	T <sub>A</sub> =25° C		10.0					uA
		T <sub>A</sub> =100° C		500					uA
<b>R<sub>θ-JC</sub></b>	Maximum Thermal Resistance (Note 3)	2.0							° C/W

### NOTES:

1. 8.3ms single half sine-wave superimposed on rated load (JEDEC method).
2. Measured at 1MHz and applied reverse voltage of 4.0Volts D.C.
3. Thermal resistance junction to case mounted on heat sink.

## Typical Characteristics Curves

Fig.1- Typical Forward Current Derating Curve


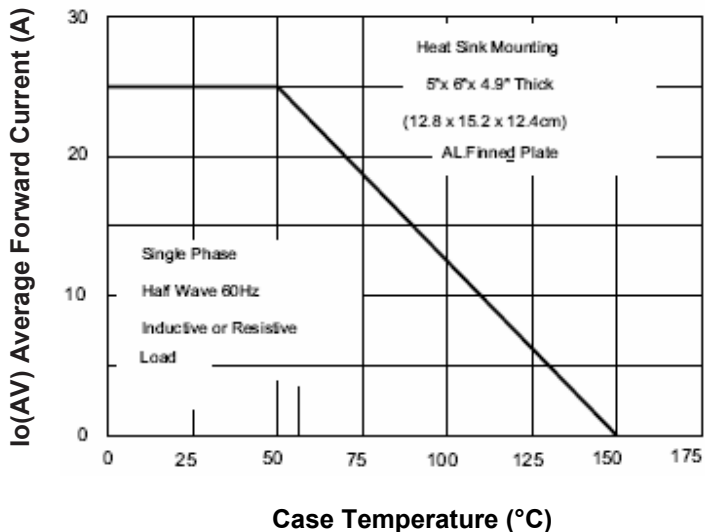


Fig.2-Max. Non-repetitive Peak Forward Surge Current

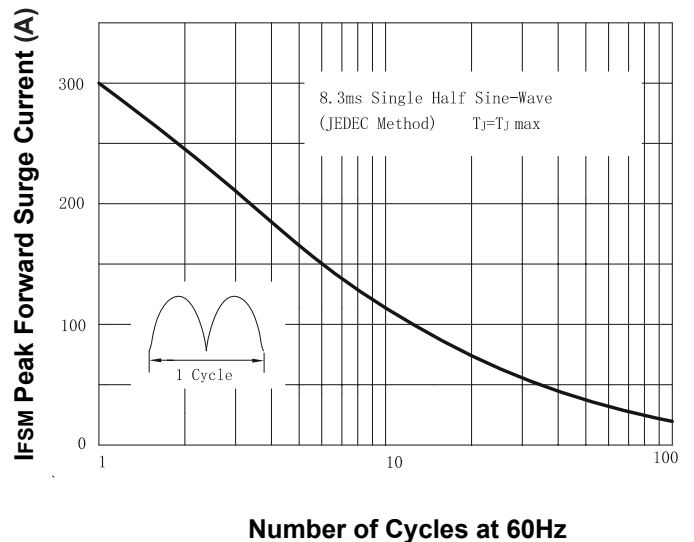

# 25.0A SINGLE-PHASE BRIDGE RECTIFIER

## TB2505 -TB2510

Fig.3- Typical Instantaneous Forward Characteristics

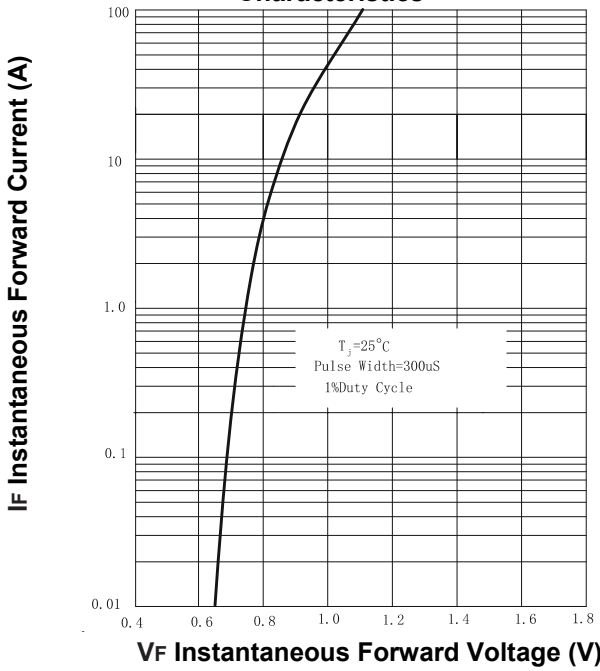


Fig.4- Typical Reverse Characteristics


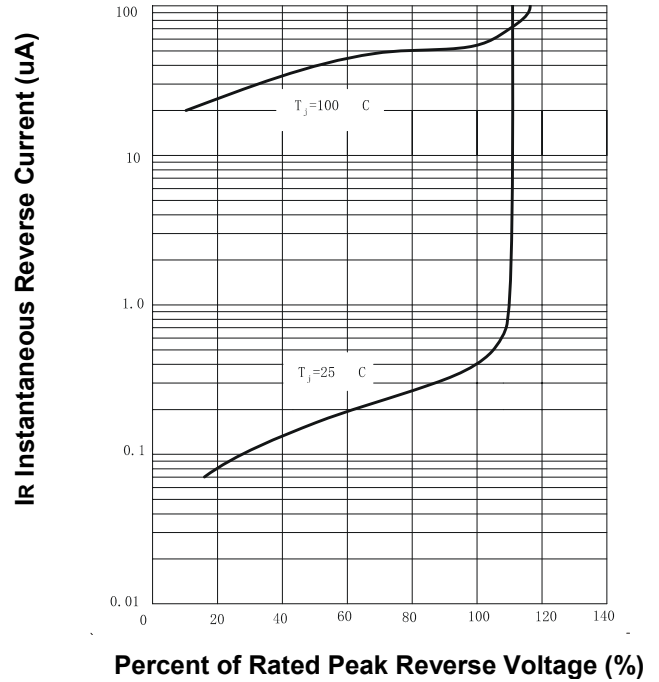


Fig.5-Typical junction capacitance



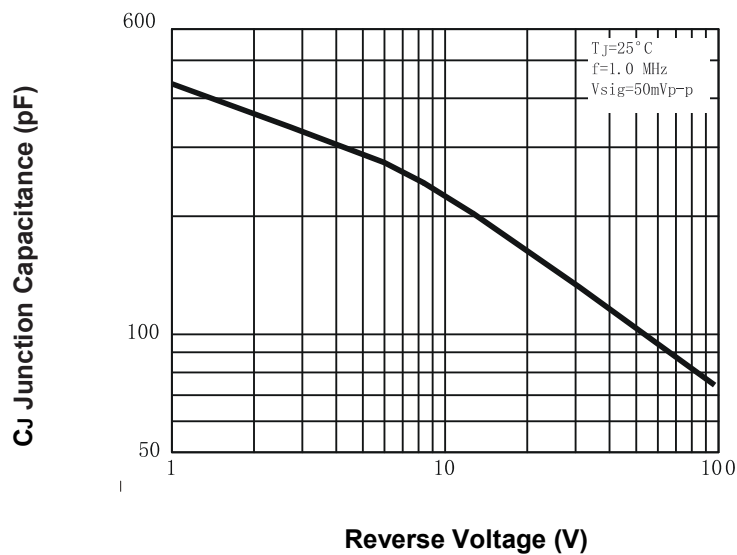

# 25.0A SINGLE-PHASE BRIDGE RECTIFIER

---

TB2505 -TB2510

## How to contact us

### **US HEADQUARTERS**

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: [taitron@taitroncomponents.com](mailto:taitron@taitroncomponents.com)

Http://[www.taitroncomponents.com](http://www.taitroncomponents.com)

### **TAITRON COMPONENTS MEXICO, S.A .DE C.V.**

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.

42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

### **TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA**

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

### **TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE**

CROSS REGION PLAZA, 899 LINLING ROAD, SUITE 18C, SHANGHAI, 200030, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931