




- Robust Construction allows for IR Processes
- Operating Temperature : 0°C to +70°C
- 6 Pin SMD Package


Electrical Parameters @ 25° C

Inductance (μ H Min.)	CMRR (dB Typ.)					DCR (Ω Max.)
	@ 100 KHz	@ 1 MHz	@ 10 MHz	@ 100 MHz	@ 500 MHz	
@ 100 KHz, 100 mVrms	-4	-13	-19	-19	-14	0.095
115						
Pins 1-6, 2-5 & 3-4						

Schematic



Package

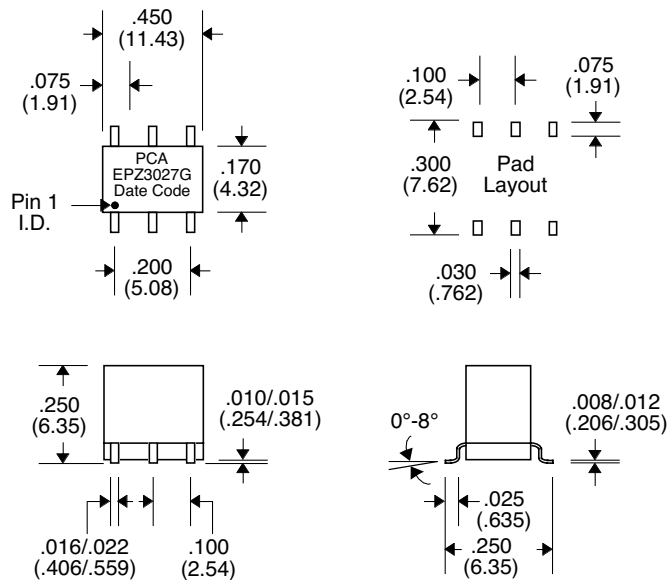

Unless Otherwise Specified Dimensions are in Inches /mm \pm .010 / .25