


Features

- Epitaxial Planar Die Construction
- Complementary PNP Type Available (DP350T05)
- Ideal for Medium Power Amplification and Switching
- **Lead, Halogen and Antimony Free, RoHS Compliant "Green" Device (Notes 2, 3 and 4)**
- **Qualified to AEC-Q101 Standards for High Reliability**

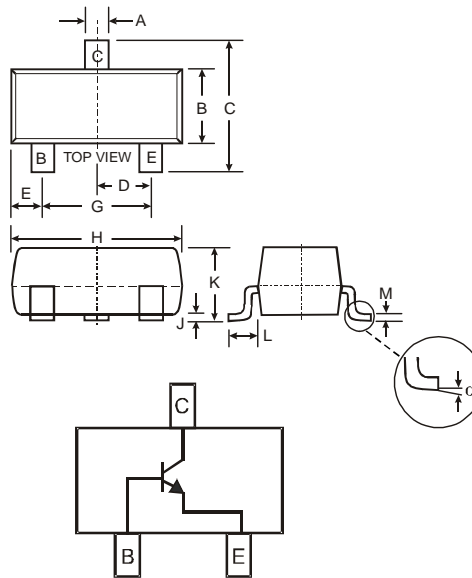

| SOT-23 | | |
|-----------------------------|-------|-------|
| Dim | Min | Max |
| A | 0.37 | 0.51 |
| B | 1.20 | 1.40 |
| C | 2.30 | 2.50 |
| D | 0.89 | 1.03 |
| E | 0.45 | 0.60 |
| G | 1.78 | 2.05 |
| H | 2.80 | 3.00 |
| J | 0.013 | 0.10 |
| K | 0.903 | 1.10 |
| L | 0.45 | 0.61 |
| M | 0.085 | 0.180 |
| α | 0° | 8° |
| All Dimensions in mm | | |

Mechanical Data

- Case: SOT-23
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminal Connections: See Diagram
- Terminals: Finish — Matte Tin Finish annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Marking Information: K3S, See Page 3
- Ordering & Date Code Information: See Page 3
- Weight: 0.008 grams (approximate)

Maximum Ratings @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|-----------------------------------|-------------|------|
| Collector-Base Voltage | V _{CB0} | 350 | V |
| Collector-Emitter Voltage | V _{CEO} | 350 | V |
| Emitter-Base Voltage | V _{EBO} | 5.0 | V |
| Continuous Collector Current | I _C | 500 | mA |
| Power Dissipation (Note 1) | P _D | 300 | mW |
| Thermal Resistance, Junction to Ambient (Note 1) | R _{θJA} | 417 | °C/W |
| Operating and Storage Temperature Range | T _J , T _{STG} | -55 to +150 | °C |

- Notes:
1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. No purposefully added lead. Halogen and Antimony Free.
 3. Diode's Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 4. Product is manufactured with Green Molding Compound and does not contain Halogens or Sb₂O₃ Fire Retardants.

Electrical Characteristics @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Min | Max | Unit | Test Condition |
|--------------------------------------|----------------------|-----|------|------|---|
| OFF CHARACTERISTICS (Note 5) | | | | | |
| Collector-Base Breakdown Voltage | V _{(BR)CBO} | 350 | — | V | I _C = 100μA, I _E = 0 |
| Collector-Emitter Breakdown Voltage | V _{(BR)CEO} | 350 | — | V | I _C = 1.0mA, I _B = 0 |
| Emitter-Base Breakdown Voltage | V _{(BR)EBO} | 5.0 | — | V | I _E = 10μA, I _C = 0 |
| Collector Cutoff Current | I _{CBO} | — | 50 | nA | V _{CB} = 250V, I _E = 0 |
| Collector Cutoff Current | I _{EBO} | — | 50 | nA | V _{CE} = 5V, I _C = 0 |
| ON CHARACTERISTICS (Note 5) | | | | | |
| DC Current Gain | h _{FE} | 20 | — | — | I _C = 1.0mA, V _{CE} = 10V |
| | | 30 | — | | I _C = 10mA, V _{CE} = 10V |
| | | 30 | 200 | | I _C = 30mA, V _{CE} = 10V |
| | | 20 | 200 | | I _C = 50mA, V _{CE} = 10V |
| | | 15 | — | | I _C = 100mA, V _{CE} = 10V |
| Collector-Emitter Saturation Voltage | V _{CE(SAT)} | — | 0.30 | V | I _C = 10mA, I _B = 1.0mA |
| | | — | 0.35 | | I _C = 20mA, I _B = 2.0mA |
| | | — | 0.50 | | I _C = 30mA, I _B = 3.0mA |
| | | — | 1.0 | | I _C = 50mA, I _B = 5.0mA |
| Base-Emitter Saturation Voltage | V _{BE(SAT)} | — | 0.75 | V | I _C = 10mA, I _B = 1.0mA |
| | | — | 0.80 | | I _C = 20mA, I _B = 2.0mA |
| | | — | 0.90 | | I _C = 30mA, I _B = 3.0mA |
| Base-Emitter On Voltage | V _{BE(ON)} | — | 2.0 | V | I _C = 100mA, V _{CE} = 10V |
| SMALL SIGNAL CHARACTERISTICS | | | | | |
| Output Capacitance | C _{obo} | — | 7.0 | pF | V _{CB} = 20V, f = 1.0MHz, I _E = 0 |
| Transition Frequency | f _T | 50 | — | MHZ | V _{CE} = 10V, I _C = 20mA |

Notes: 5. Short duration pulse test used to minimize self-heating effect.

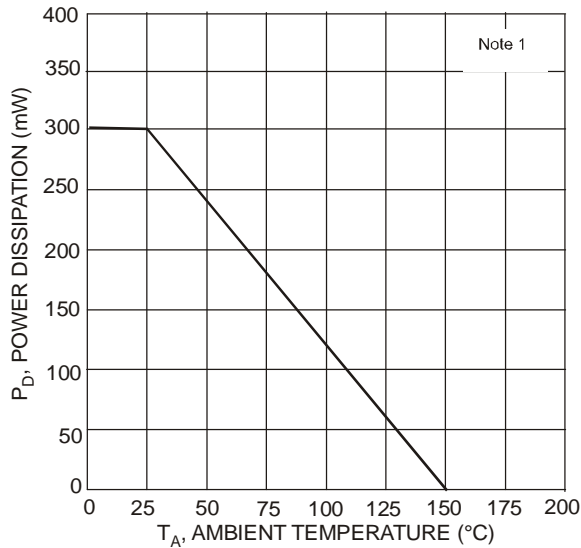


Fig. 1, Max Power Dissipation vs. Ambient Temperature

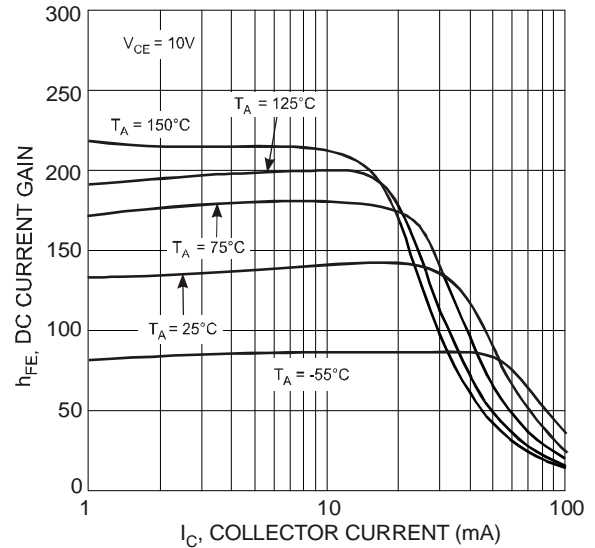


Fig. 2, DC Current Gain vs. Collector Current

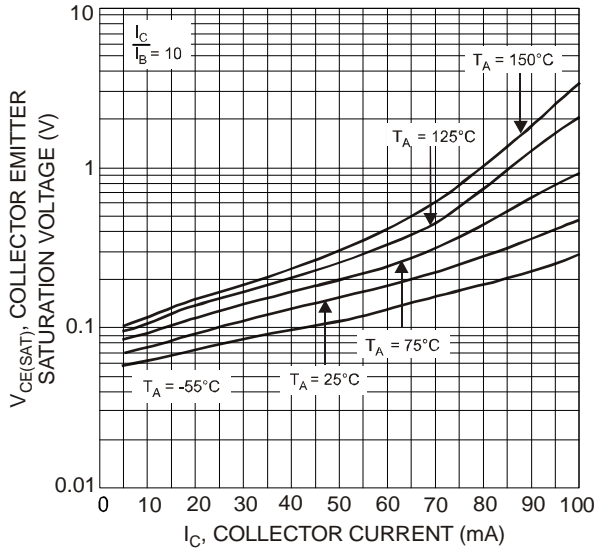


Fig. 3, Collector-Emitter Saturation Voltage vs. Collector Current

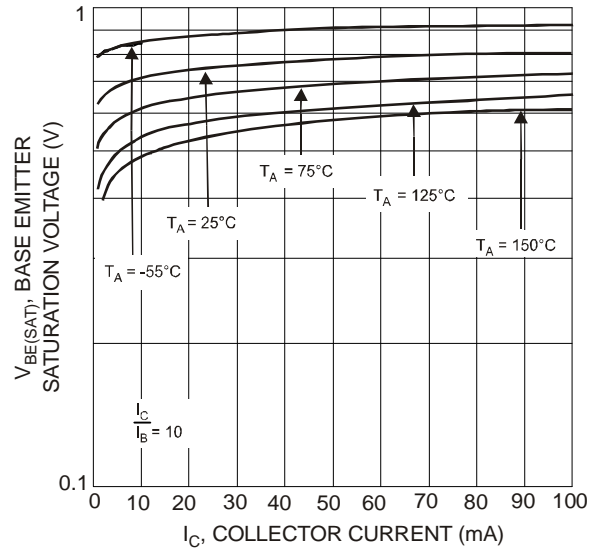


Fig. 4, Base-Emitter Saturation Voltage vs. Collector Current

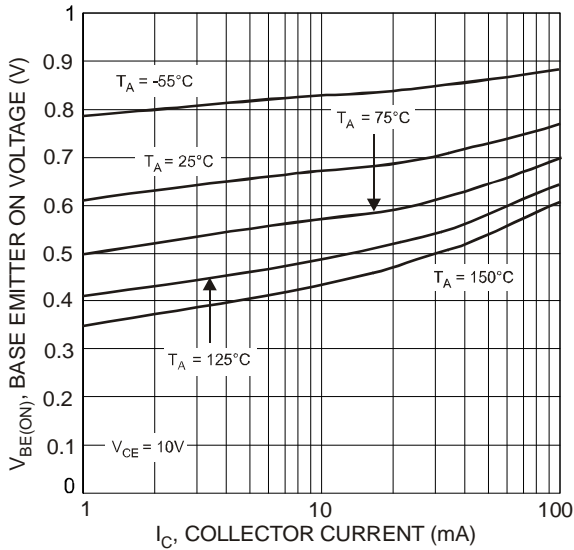


Fig. 5, Base-Emitter On Voltage vs. Collector Current

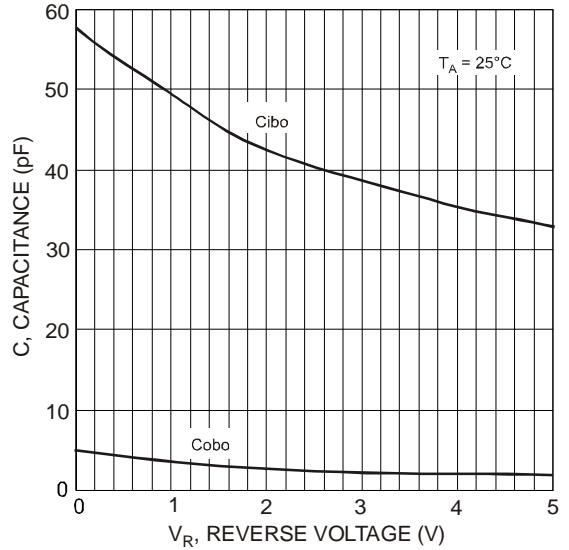



Fig. 6, Capacitance vs. Reverse Voltage

Ordering Information (Note 6)

| Device | Packaging | Shipping |
|------------|-----------|------------------|
| DN350T05-7 | SOT-23 | 3000/Tape & Reel |

Notes: 6. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



K3S = Product Type Marking Code
YM = Date Code Marking
Y = Year ex: S = 2005
M = Month ex: 9 = September

Date Code Key

| Year | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|------|
| Code | S | T | U | V | W | X | Y | Z |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.