

## LCT43-E Series

47 Watts

**Total Power:** 47 Watts  
**Input Voltage:** 85 - 264 VAC  
120 - 300VDC  
**# of Outputs:** Triple



### Special Features

- Totally enclosed
- Universal input
- Quick Installation
- Built-in EMI filter
- Low output ripple
- Overvoltage protection
- Overload protection

## Electrical Specifications

### Input

Input range	85 - 264 VAC (wide range) 120 - 300VDC
Frequency	47-63 Hz
Inrush current	<20A peak @ 115VAC, <40A peak @ 230VAC cold start @ 25°C
Input current	1A max. (RMS) @ 115VAC
Efficiency	70% typical at full load
EMI filter	FCC Class B conducted and radiated; CISPR 22 Class B conducted and radiated; EN55022 Class B conducted and radiated Bellcore GR-1089-core Class B conducted
Safety ground leadage current	<3.5 mA @ 50/60 Hz, 264 VAC input

### Output

Maximum power	47W with 12CFM forced air
Cross regulation	±2% on output 1; ±5% on outputs 2, 3
Hold-up time	10ms @ 47W load, 100VAC input
Overload protection	Short circuit protection on all outputs. Case overload protect- ed @ 110-135% above peak rating
Overvoltage protection	5.50-6.75 VDC on main output

### Safety

<b>VDE</b>	0805/EN60950 21310-3336-0003
<b>UL</b>	UL60950 E186249
<b>CSA</b>	CSA 22.2-234 -950-95-M90
<b>CB</b>	Certificate and report 6593
<b>CE</b>	Mark (LVD)



## Environmental Specifications

Operating temperature:	0° to 50°C ambient derate each output as 2.5% per degree from 50° to 70°C
Storage temperature:	-40°C to +85°C
Temperature coefficient:	±.04% per °C
Electromagnetic susceptibility:	designed to meet IEC1000-4; -2, -3, -4, -5, -6, -8, -11 Level 3
Humidity:	Operating; non-condensing 5% to 90%
Vibration:	.41G from 3 to 500Hz; Spectral break points of .0065 G <sup>2</sup> /Hz at 10 Hz and 200 Hz and 5 db/octave roll off at each end, 2 hours per axis
MTBF demonstrated	>300,000 hours at full load and 25°C ambient conditions

## Ordering Information

Model Number	Output Voltage	Minimum Load	Maximum Load with Convection Cooling	Maximum Load with 12CFM Forced Air	Peak Load <sup>1</sup>	Regulation <sup>2</sup>	Ripple P/P (PARD) <sup>3</sup>
LCT43-E	+5V	1.0A	4A	7A	8A	+4/-2%	50mV
	+12V	0.1A	1A	1.2A	1.5A	±5%	120mV
	-12V	0A	0.5A	0.5A	0.6A	±5%	120mV

1. Peak current lasting <30 seconds with a maximum 10% duty cycle.
2. At 25°C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF (tantalum capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

## Mechanical Drawing

### Mating Connectors

**AC Input:** IEC 320  
**DC Outputs:** Molex 15-48-0406 (USA)


**Notes:**

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is  $\pm 0.02"$  ( $\pm 0.5\text{mm}$ )
3. Specifications are for convection rating at factory settings at 115VAC input 25°C unless otherwise stated
4. Warranty: 1 year
5. Weight: 1.25lbs/0.57kg

### Pin Assignments

**Connector** LCT43-E

SK1-1	AC Line
SK1-2	Ground
SK1-3	AC Neutral
SK2-1	-12V
SK2-2	Com
SK2-3	+5V
SK2-4	+5V
SK2-5	Common
SK2-6	+12V

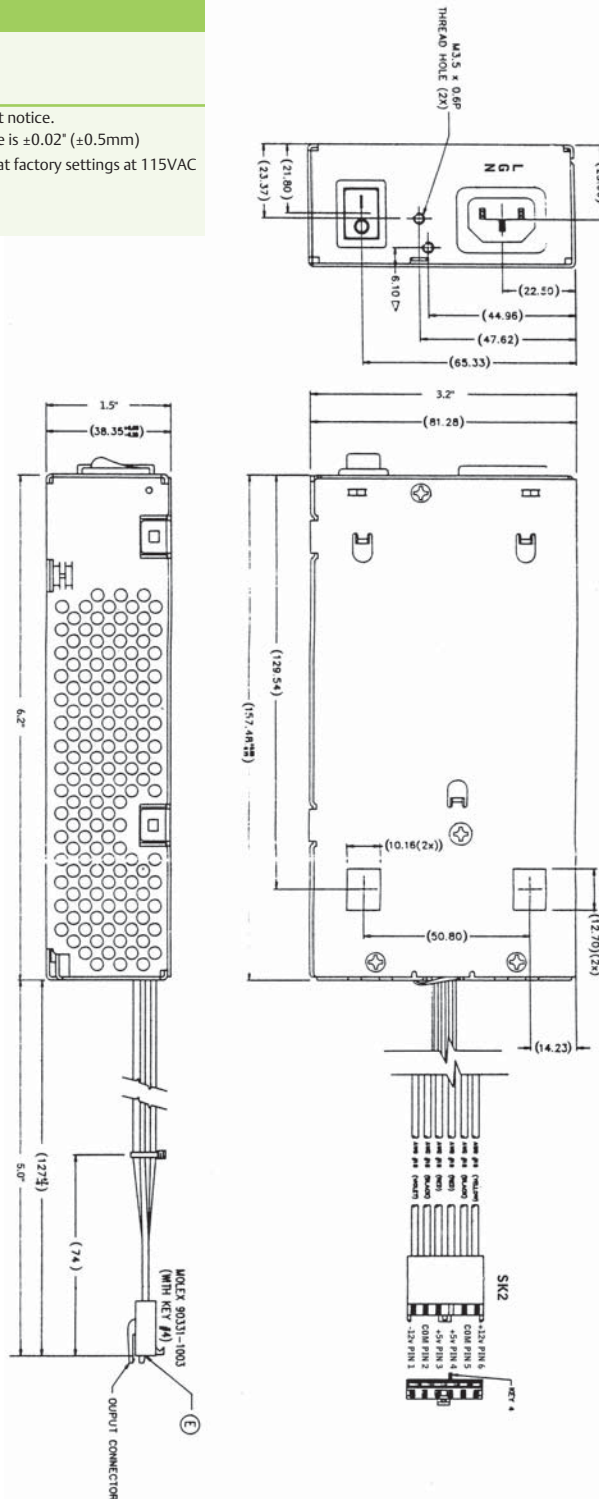

## Astec Power

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698  
Technical Support: +1 888 41 ASTEC  
or +1 407 241 2752

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

Units 2111-2116, Level 21  
Tower 1, Metroplaza  
223, Hing Fong Road  
Kwai Fong, New Territories  
Hong Kong  
Telephone: +852 2437 9662  
Facsimile: +852 2402 4426

For global contact, visit:

[www.astecpower.com](http://www.astecpower.com)  
[technicalsupport@astec.com](mailto:technicalsupport@astec.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Astec Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Printed in USA

**Emerson Network Power.**  
The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

[EmersonNetworkPower.com](http://EmersonNetworkPower.com)

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2006 Emerson Electric Co.