

SPECIFICATIONS

DDR SO DIMM Socket

Mechanical


Contact Retention Force: 0.15kg min.
Durability : 25 Cycles

Electrical


Voltage Rating: 25V
Current Rating: 0.3A
Contact Resistance: 50mΩ max.
Dielectric Withstanding Voltage: 250V AC/1 min.
Insulation Resistance: 100MΩ

Physical

Housing: Thermoplastic, UL 94V-0 rated in Ivory Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Metal Spring: Copper alloy
Operating Temperature: -40 to +85

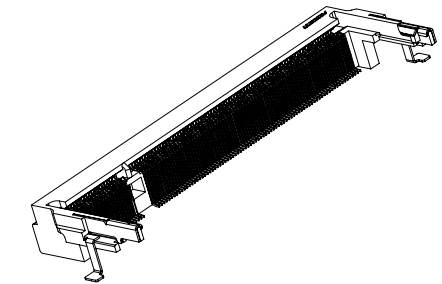

DRAWING

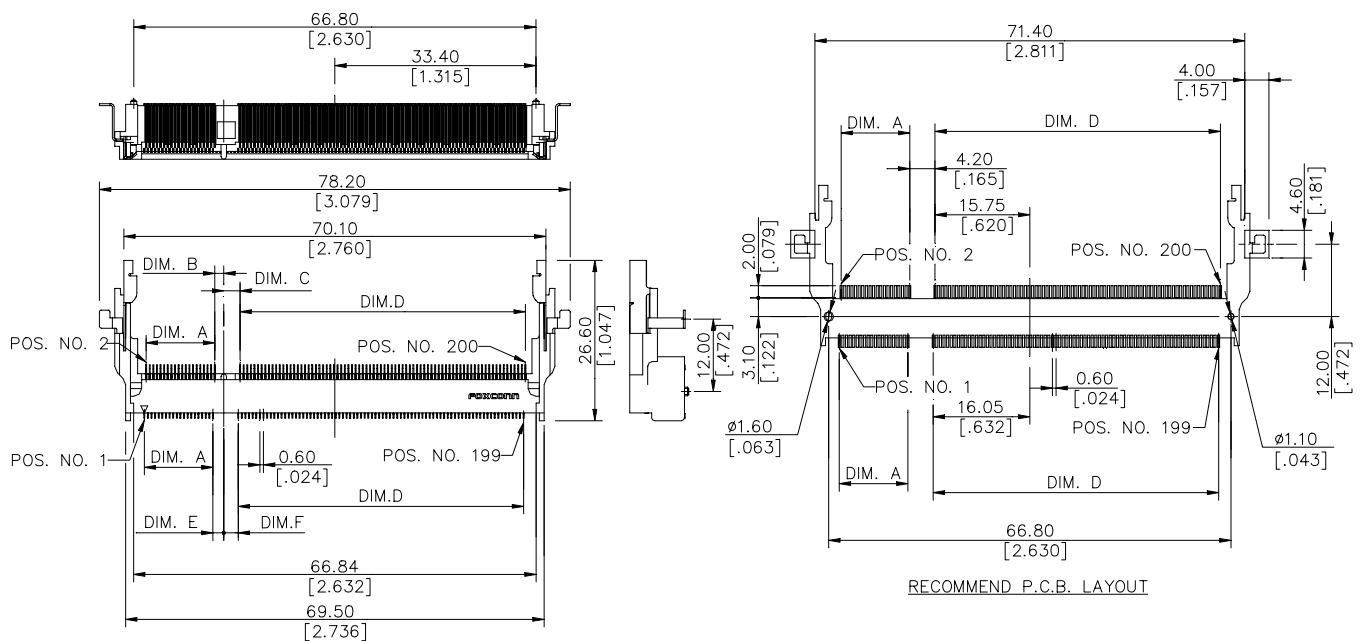

ORDERING INFORMATION

PRODUCT NO.: **A S 0 A4 2 6 - BA ***

- Memory Module Socket ——— **A**
 - Horizontal Type ——— **S**
 - Single Row ——— **0**
 - No. of Pos. ——— **A4**
A4=200 Pos.
 - **2**
 - **6**
 - **BA**
 - *****
- S**=Standard Type
 - R**=Reverse Type
 - DDR 9.2mm Height**
 - Contact Area Plating**
6=10u" Gold
 - SMT Type**

| | | | |
|-------------|------------------|----------------|----------------|
| AS0A426-BAR | 11.40 [.449] | 2.70 [.108] | 1.50 [.059] |
| AS0A426-BAS | 47.40 [1.866] | 1.80 [.071] | 2.40 [.094] |
| P/N | DIM. D | DIM. E | DIM. F |
| AS0A426-BAR | 47.40 [1.866] | 2.40 [.094] | 1.80 [.071] |
| AS0A426-BAS | 11.40 [.449] | 1.50 [.059] | 2.70 [.108] |
| P/N | DIM. A | DIM. B | DIM. C |