

## Micropower, 300mA Low Dropout CMOS Regulator

### Features

- 300mA output current capability
  - 300mA peak in SOT-23 package
  - 300mA continuous in MSOP package
- 300mV maximum dropout voltage at full load
- Excellent line and load regulation
- Stable with any output capacitor
- Ultra low noise with optional bypass capacitor
- Fast power-up with bypass capacitor
- "Zero" current in Shutdown mode
- Thermal overload protection
- Foldback current limiting protection
- Reverse current protection

### Applications


- Notebook and palmtop computers
- Cell phones and battery powered devices
- Consumer and personal electronics
- PC Card V<sub>CC</sub> and V<sub>PP</sub> regulation and switching

### CM3015 Regulator Family

PRODUCT	OUTPUT VOLTAGE*
CM3015-00	Adjustable
CM3015-12	1.2V
CM3015-15	1.5V
CM3015-18	1.8V
CM3015-25	2.5V
CM3015-28	2.8V
CM3015-30	3.0V
CM3015-33	3.3V

\* For other output voltages, please consult factory.

### Block Diagram

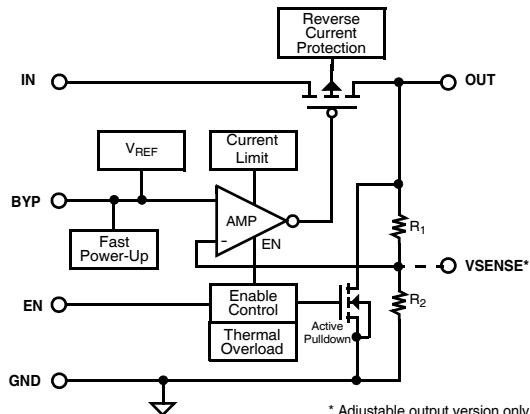

\* Adjustable output version only

PACKAGE / PINOUT DIAGRAM (Note 1)							
TOP VIEW		TOP VIEW		TOP VIEW		TOP VIEW	
5-PIN SOT23 CM3015-12ST, -15ST, -18ST, -25ST, -30ST, -33ST		6-PIN SOT23 CM3015-00ST		8-PIN MSOP CM3015-12MA, -15MA, -18MA, -25MA, -30MA, -33MA		8-PIN MSOP CM3015-00MA	
<p>Notes:</p> <ol style="list-style-type: none"> <li>1) These drawings are not to scale.</li> <li>2) See Ordering Information section for part marking details.</li> </ol>							

### PIN DESCRIPTIONS

SOT23-5 PIN(S)	SOT23-6 PIN(S)	MSOP-8 PIN(S)	NAME	DESCRIPTION
1	1	2	V <sub>IN</sub>	V <sub>IN</sub> is the input power source for the regulator. If this input is within a few inches of the main supply filter, a capacitor may not be necessary. Otherwise, an input filter capacitor of about 1-10µF will ensure adequate filtering.
2	2	5-8	GND	The negative reference for all voltages.
3	3	1	EN	Enable input. When this input is taken low (< 0.4V), the regulator is disabled. In this state, the supply current will drop to near zero.
4	4	4	BYP	Reference Bypass Pin. Connect to an external capacitor for noise reduction. A 10nF-100nF size ceramic capacitor is recommended.
—	5	4	VSENSE	This pin sets V <sub>OUT</sub> with an external divider: V <sub>OUT</sub> = VSENSE(1 + R <sub>1</sub> /R <sub>2</sub> ). R <sub>1</sub> is the upper resistor, like the internal divider shown on the block diagram on page 1.
5	6	3	V <sub>OUT</sub>	V <sub>OUT</sub> is the output voltage used to power the load. An output capacitor may not be required for stability, but its use can improve transient response, noise performance and power supply ripple rejection for frequencies over ~100kHz (see note 1).

Note 1: Tantalum, electrolytic or low cost ceramic capacitors may be used.

## Ordering Information

PART NUMBERING INFORMATION			
Pins	Package	Ordering Part Number <sup>1</sup>	Part Marking
6	SOT23-6	CM3015-00ST	CC00
5	SOT23-5	CM3015-12ST	CC12
5	SOT23-5	CM3015-15ST	CC15
5	SOT23-5	CM3015-18ST	CC18
5	SOT23-5	CM3015-25ST	CC25
5	SOT23-5	CM3015-28ST	CC28
5	SOT23-5	CM3015-30ST	CC30
5	SOT23-5	CM3015-33ST	CC33
8	MSOP-8	CM3015-00MA	CM301500
8	MSOP-8	CM3015-12MA	CM301512
8	MSOP-8	CM3015-15MA	CM301515
8	MSOP-8	CM3015-18MA	CM301518
8	MSOP-8	CM3015-25MA	CM301525
8	MSOP-8	CM3015-28MA	CM301528
8	MSOP-8	CM3015-30MA	CM301530
8	MSOP-8	CM3015-33MA	CM301533

Note 1: Parts are shipped in Tape & Reel form unless otherwise specified.

## Specifications

ABSOLUTE MAXIMUM RATINGS		
PARAMETER	RATING	UNITS
ESD Protection (HBM)	±2000	V
Pin Voltages		
V <sub>IN</sub>	[GND - 0.6] to [+6.0]	V
EN	[GND - 0.6] to [V <sub>CC</sub> + 0.6]	V
V <sub>OUT</sub>	[GND - 0.6] to [V <sub>CC</sub> + 0.6]	V
Storage Temperature Range	-40 to +150	°C
Operating Temperature Range, Junction	0 to +150	°C
Power Dissipation (Notes 1,2)	Internally Limited	W

STANDARD OPERATING CONDITIONS		
PARAMETER	RATING	UNITS
V <sub>IN</sub>	2.2 to 6.0	V
Ambient Operating Temperature Range	-40 to +85	°C
Load Current	0 to 300	mA
C <sub>EXT</sub> (notes 1 and 2)	0 to 50	µF

Note 1: Tantalum, electrolytic or low cost ceramic capacitors may be used.

Note 2: V<sub>OUT</sub> + 1V < V<sub>IN</sub> & 2.5V < V<sub>IN</sub> < 6V, I<sub>OUT</sub> = 1mA, C<sub>IN</sub> = 2.2µF, T<sub>J</sub> = 25°C, C<sub>OUT</sub> = 2.2µF, V<sub>SD</sub> = 1.5V, unless specified otherwise. **Bold values indicate -40°C < T<sub>J</sub> < 125°C**

## Specifications (cont'd)

ELECTRICAL OPERATING CHARACTERISTICS (SEE NOTE 1)						
SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT S
V <sub>OUT</sub>	Regulator Output Voltage	T <sub>A</sub> = 25°C 0°C < T <sub>J</sub> < 125°C -40°C < T <sub>J</sub> < 125°C	-1 -2 -3		+1 +2 +3	% % %
V <sub>R LINE</sub>	Line Regulation	V <sub>OUT</sub> + 1V < V <sub>IN</sub> & 2.5V < V <sub>IN</sub> < 6V		0.1	0.2 <b>0.4</b>	%/V
V <sub>R LOAD</sub>	Load Regulation	0mA ≤ I <sub>OUT</sub> ≤ 150mA; V <sub>IN</sub> = V <sub>OUT</sub> + 1V; Note 2		0.1	0.25 <b>0.50</b>	%
V <sub>SENSE</sub>	Reference Voltage	T <sub>A</sub> = 25°C		1.20		V
R <sub>DROP</sub>	Dropout Resistance	1mA ≤ I <sub>LOAD</sub> ≤ 300mA; V <sub>IN</sub> = V <sub>OUT</sub> (nominal) - 100mV		0.7	1.0 <b>1.2</b>	Ω
I <sub>GND</sub>	Ground Current	with EN tied to V <sub>IN</sub> ; I <sub>LOAD</sub> = 1mA		150	200	μA
		with EN tied to V <sub>IN</sub> ; I <sub>LOAD</sub> = 350mA		165	250	μA
		with EN tied to GND (Disable Mode)		0.01	1	μA
V <sub>EN</sub>	Enable Voltage	Regulator enabled	1.5			V
V <sub>DIS</sub>	Disable Voltage	Regulator shutdown			0.40 <b>0.18</b>	V
I <sub>EN</sub>	Enable Input Current			0.01		μA
PSSR	Power Supply Ripple Rejection	f=1kHz		75		dB
E <sub>NOISE</sub>	Output Noise Voltage	10Hz-100kHz; C <sub>BYP</sub> = 0.1μF		30		μVRms
t <sub>ON</sub>	V <sub>OUT</sub> Turn-on Time	C <sub>BYP</sub> = 0μF		80		μs
		C <sub>BYP</sub> = 0.1μF		100		μs
I <sub>LIM</sub>	Overload Current Limit			800		mA
I <sub>SC</sub>	Short Circuit Current Limit	V <sub>OUT</sub> < 0.5V		550		mA
T <sub>JSD</sub>	Thermal Shutdown Junction Temperature			165		°C
T <sub>HYST</sub>	Thermal Hysteresis			20		°C

Note 1: V<sub>OUT</sub> + 1V < V<sub>IN</sub> & 2.5V < V<sub>IN</sub> < 6V, I<sub>OUT</sub> = 1mA, C<sub>IN</sub> = 2.2μF, T<sub>J</sub> = 25°C, C<sub>OUT</sub> = 2.2μF, V<sub>SD</sub> = 1.5V, unless specified otherwise. **Bold values indicate -40°C < T<sub>J</sub> < 125°C**

Note 2: Regulation voltages and dropout resistance measured at constant junction temperature using low duty cycle pulse testing.

Note 3: Line regulation is displayed as the average regulation across the full operating range measured in %/V.

## THERMAL PERFORMANCE

PACKAGE	θ <sub>JA</sub> MINIMUM FOOTPRINT	θ <sub>JA</sub> 1" SQUARE 2OZ. COPPER
SOT23-5 / SOT23-6	220°C/W	170°C/W
MSOP-8 Fused	160°C/W	70°C/W

## Performance Information

### Typical DC Characteristics (nominal conditions unless specified otherwise)

Nominal Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 2.2\mu F$ , No  $C_{BYP}$ ,  $V_{IN} = 4.0V$ , Load = 5mA (all plots measured with 3.0V  $V_{OUT}$ )

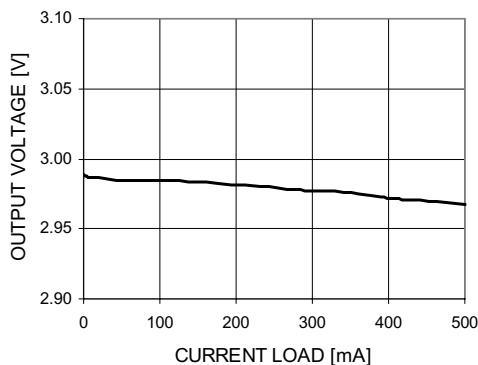


Figure 1. Load Regulation

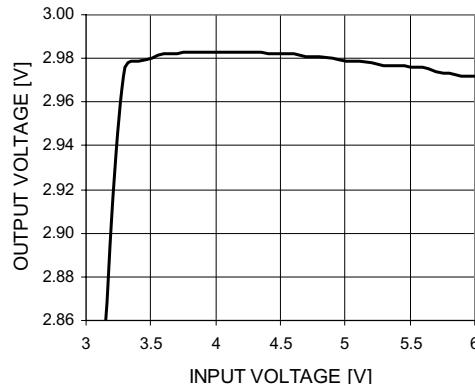


Figure 4. Line Regulation ( $I_{LOAD}=300mA$ )

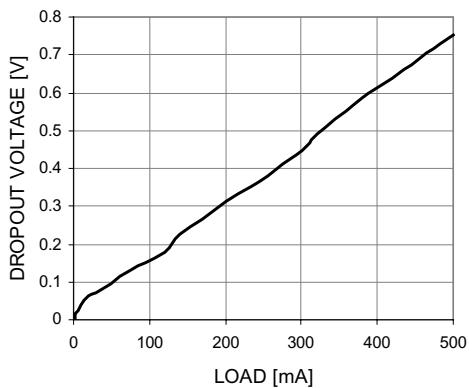


Figure 2. Dropout Voltage ( $V_{OUT}=2.9V$ )

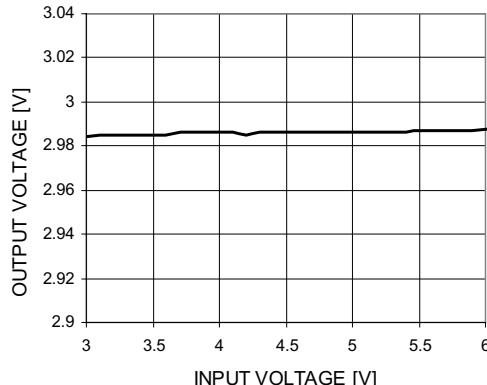


Figure 5. Line Regulation ( $I_{LOAD}=5mA$ )

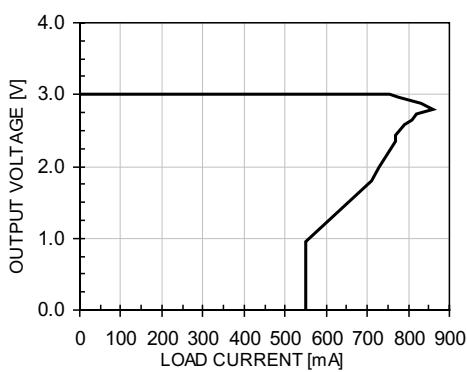


Figure 3. Foldback Current Limiting

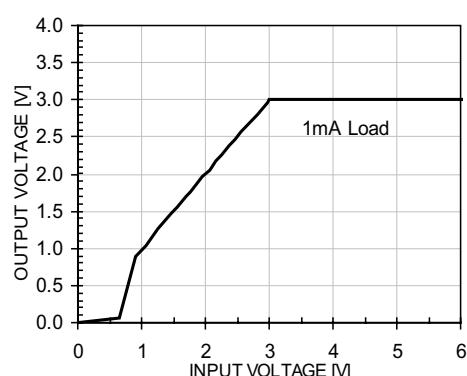


Figure 6. Line Regulation ( $I_{LOAD}=1mA$ )

## Performance Information (cont'd)

### Typical DC Characteristics (cont'd - nominal conditions unless specified otherwise)

Nominal Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 2.2\mu F$ , No  $C_{BYP}$ ,  $V_{IN} = 4.0V$ , Load = 5mA (all plots measured with 3.0V  $V_{OUT}$ )

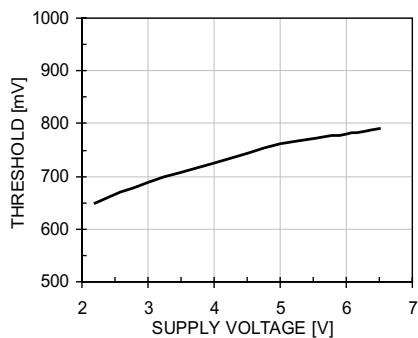


Figure 7. Enable Voltage Threshold

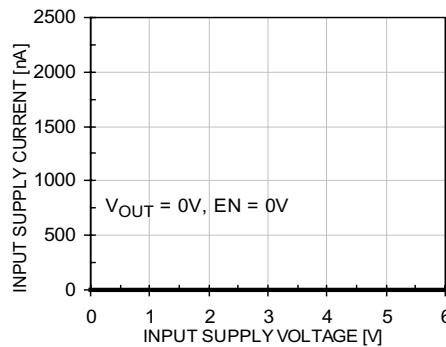


Figure 10. Input Supply Current vs. Voltage

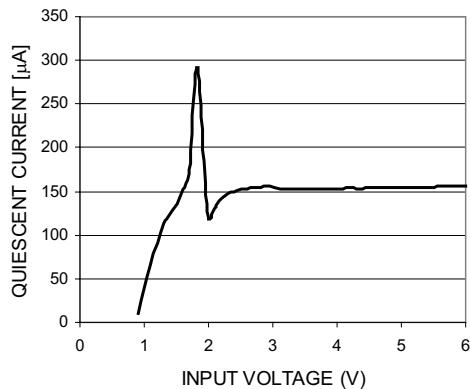


Figure 8. Supply Current vs. Voltage  
(EN=VIN,  $I_{LOAD} = 5\text{mA}$ )

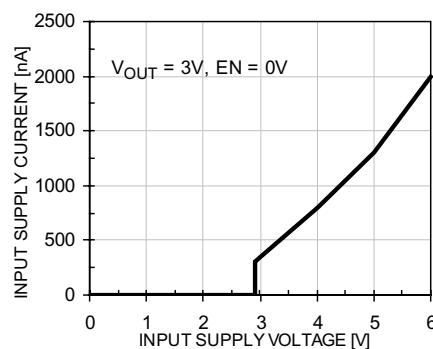


Figure 11. Input Supply Current vs. Voltage

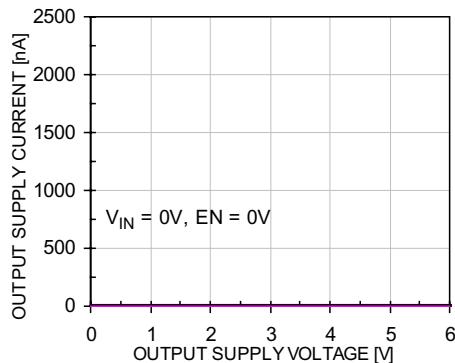


Figure 9. Output Supply Current vs. Voltage


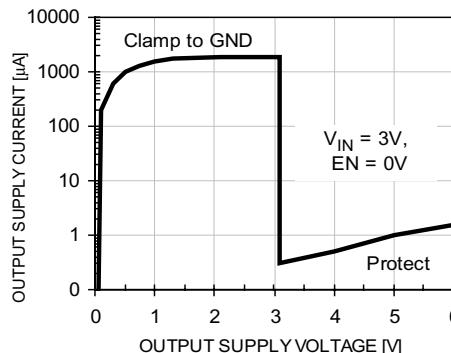


Figure 12. Output Supply Current vs. Voltage


## Performance Information (cont'd)

### Transient Characteristics (nominal conditions unless specified otherwise)


Nominal Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 2.2\mu F$ , No  $C_{BYP}$ ,  $V_{IN} = 4.0V$ , Load = 5mA  
(all plots measured with 3.0V  $V_{OUT}$ )

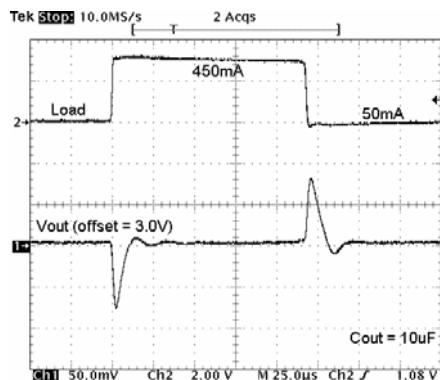


**Figure 13.** 10% to 90% Load Step  
( $t_r=1\mu s$ ,  $C_{OUT}=10\mu F$ )

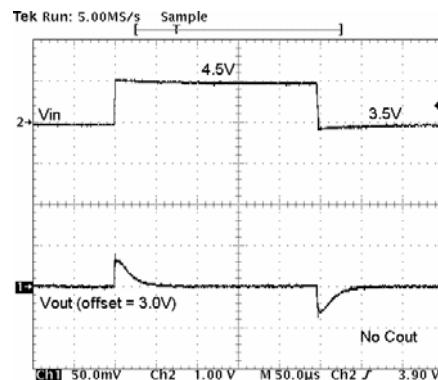


**Figure 16.** 3.5V - 4.5V Line Step  
( $t_r=1\mu s$ , No  $C_{OUT}$ )

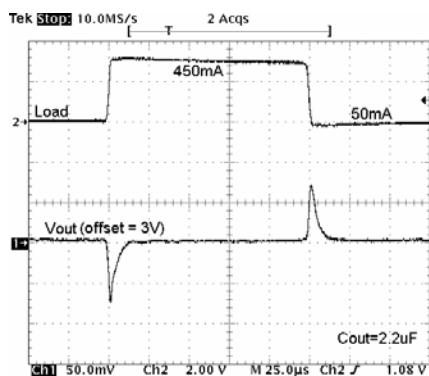


**Figure 14.** 10% to 90% Load Step  
( $t_r=1\mu s$ ,  $C_{OUT}=2.2\mu F$ )

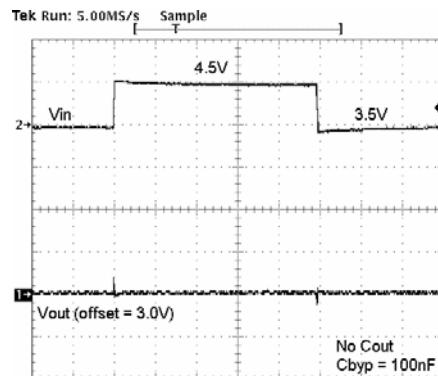

**Figure 17.** 3.5V - 4.5V Line Step  
( $t_r=1\mu s$ , No  $C_{OUT}$ ,  $C_{BYP}=100nF$ )

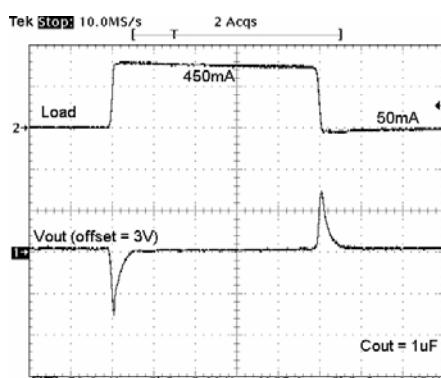

**Figure 15.** 10% to 90% Load Step  
( $t_r=1\mu s$ ,  $C_{OUT}=1.0\mu F$ )

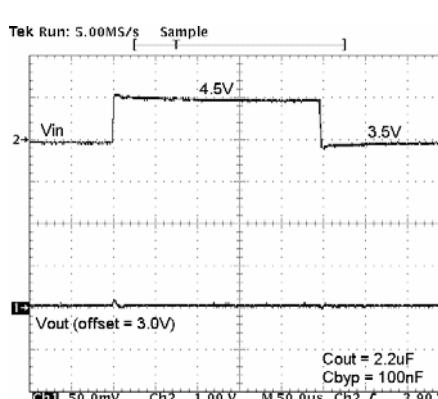

**Figure 18.** 3.5V - 4.5V Line Step  
( $t_r=1\mu s$ ,  $C_{OUT}=2.2\mu F$ ,  $C_{BYP}=100nF$ )

## Performance Information (cont'd)

### Transient Characteristics (nominal conditions unless specified otherwise)

Nominal Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 2.2\mu F$ , No  $C_{BYP}$ ,  $V_{IN} = 4.0V$ , Load = 5mA  
 (all plots measured with 3.0V  $V_{OUT}$ )

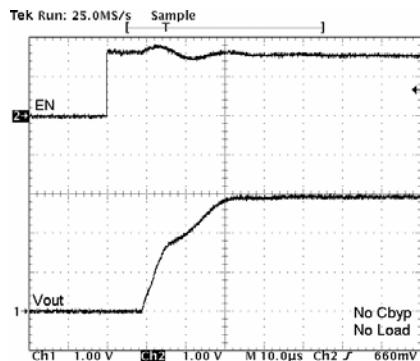


Figure 19. Enable Response  
(No  $C_{BYP}$ , No Load)

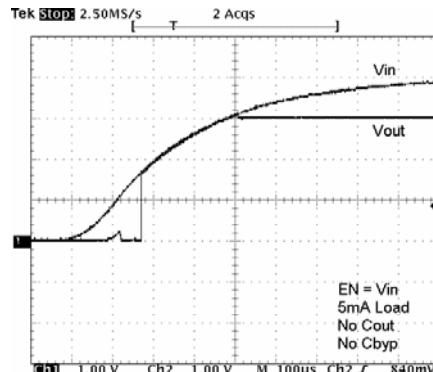


Figure 22. Power-Up (EN=V<sub>IN</sub>,  $I_{LOAD}=5mA$ ,  
No  $C_{OUT}$ , No  $C_{BYP}$ )

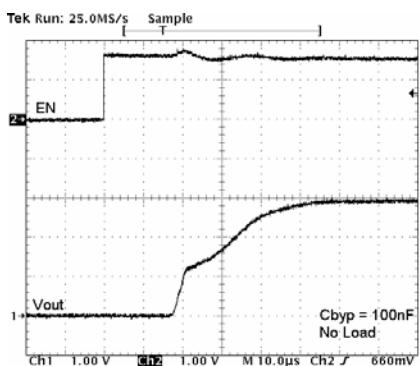


Figure 20. Enable Response  
( $C_{BYP}=100nF$ , No Load)

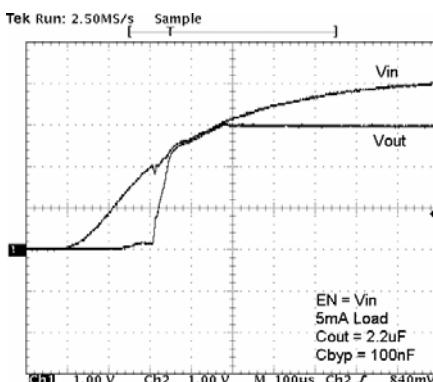


Figure 23. Power-Up (EN=V<sub>IN</sub>,  $I_{LOAD}=5mA$ ,  
 $C_{OUT}=2.2\mu F$ ,  $C_{BYP}=100nF$ )

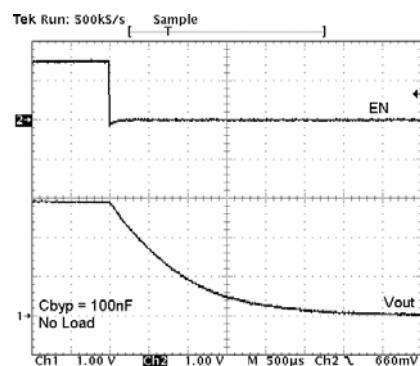


Figure 21. Disable Response  
( $C_{BYP}=100nF$ , No Load)


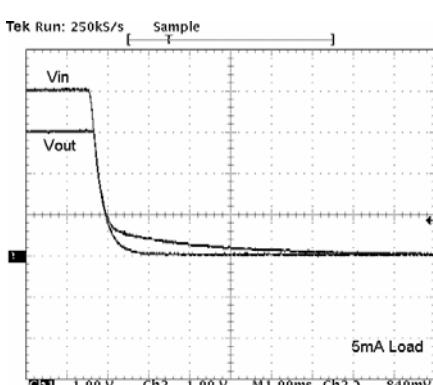


Figure 24. Power-Down ( $I_{LOAD}=5mA$ )


## Performance Information (cont'd)

**Power Supply Ripple Rejection and Noise Characteristics (nominal conditions unless specified otherwise)**


Nominal Conditions:  $C_{IN} = 1\mu F$ ,  $V_{IN} = 4.0V$ , PSRR measured with 50mV peak-to-peak sine wave on  $V_{IN}$ .

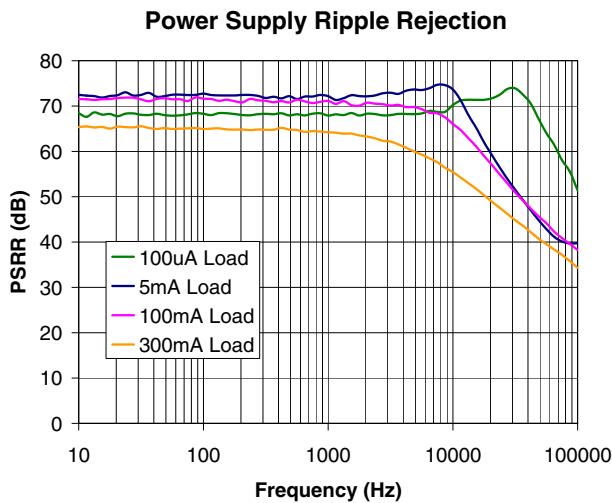


**Figure 25. Power Supply Ripple Rejection**  
( $C_{OUT}=10\mu F$ ,  $C_{BYP}=100nF$ )

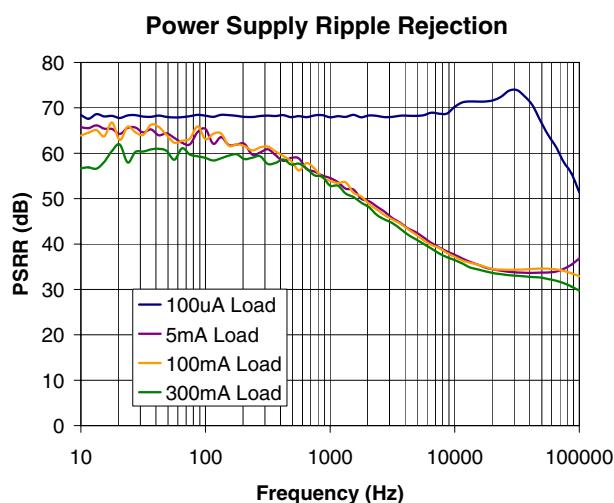

**Figure 27. Power Supply Ripple Rejection**  
(No  $C_{OUT}$ ,  $C_{BYP}=100nF$ )

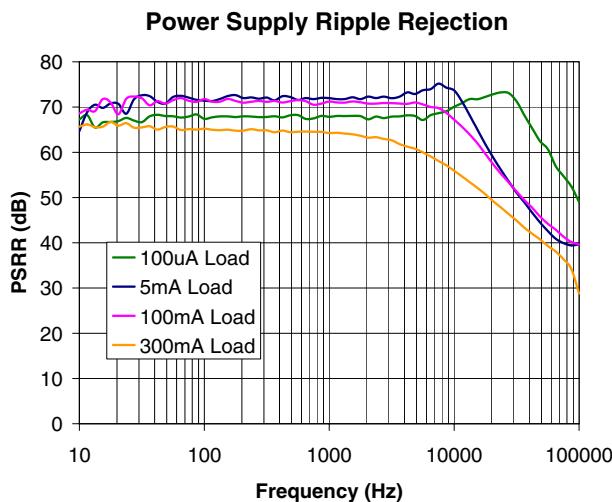

**Figure 26. Power Supply Ripple Rejection**  
( $C_{OUT}=2.2\mu F$ ,  $C_{BYP}=100nF$ )

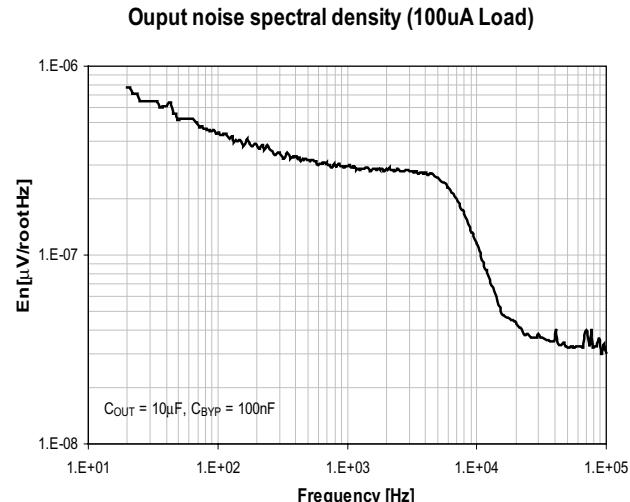

**Figure 28. Output Noise Spectral Density**  
( $I_{LOAD}=100\mu A$ ,  $C_{OUT}=10\mu F$ ,  $C_{BYP}=100nF$ )

## Performance Information (cont'd)

### Typical Thermal Characteristics (nominal conditions unless specified otherwise)

Nominal Conditions:  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 2.2\mu F$ , No  $C_{BYP}$ ,  $V_{IN} = 4.0V$ , Load = 5mA  
(all plots measured with 3.0V  $V_{OUT}$ )

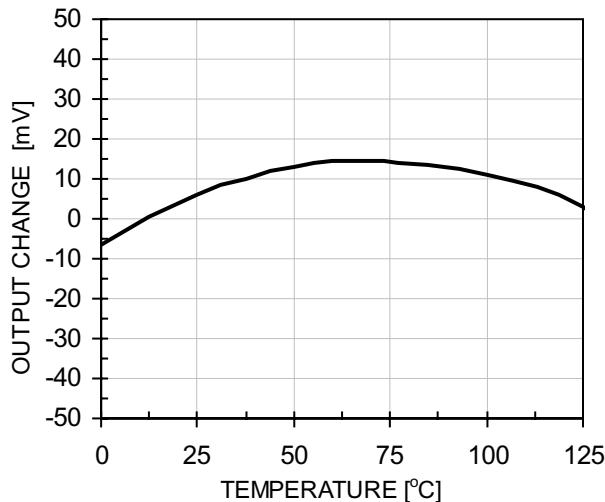


Figure 29.  $V_{OUT}$  vs. Temperature  
( $T_A = 0^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ )

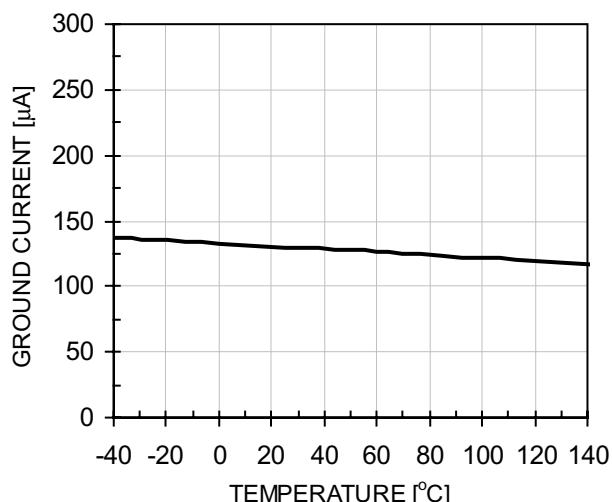


Figure 31.  $I_{GND}$  vs. Temperature  
( $T_A = -40^{\circ}\text{C}$  to  $140^{\circ}\text{C}$ )


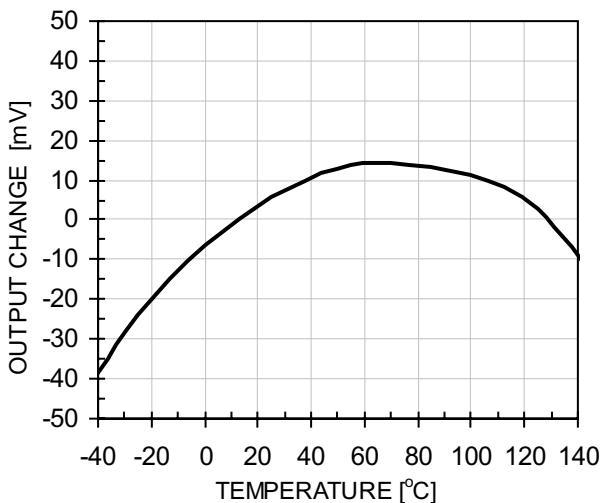


Figure 30.  $V_{OUT}$  vs. Temperature  
( $T_A = -40^{\circ}\text{C}$  to  $140^{\circ}\text{C}$ )

## Application Information

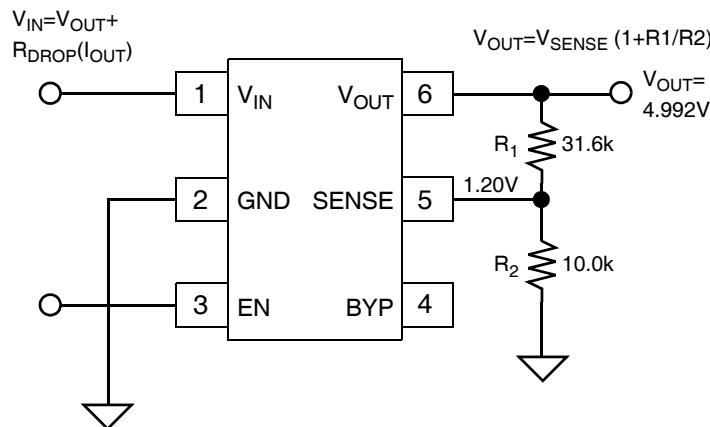

For the input voltage, Vin minimum will depend on the output current. For example, if Iout is 100mA, Vin must be at least  $4.992V = 1\text{ohm} \times 100\text{mA} = 4.992 + 0.1 = 5.092V$ .

**Figure 32. Adjustable Regulator Application Example**

### Output Compensation

Low-dropout regulator topologies use a current-carrying transistor ("pass device") that adds additional gain and phase shift to the design. It is necessary to compensate for these attributes to prevent the design from becoming unstable. The simplest way to do this is to add an output RC filter to roll off the gain. Since all regulators use an output capacitor anyway, the only component needed is a suitable resistance. Fortunately, for the usual range and types of output capacitors, this resistance can be supplied by the ESR of the caps.

For many years, capacitors have been the largest components in regulator circuits, but newer types are shrinking in size rapidly. Unfortunately, their ESRs have shrunk as well, taking them out of the range where they can perform the R function described in existing LDOs. The CM3015 is a new breed of LDO regulator that can work with these tiny low-ESR capacitors and thus permit designs that take a minimum of space.

An attribute of the LDO topology is that the pass device gain generally increases with increasing output current. This may affect output stability: a design that didn't need a capacitor now does, or a design that used a small value now needs a larger one. The CMD advantage is that this component can be selected from any capacitor family without regard to its ESR. If the circuit calls for a tiny, low-ESR capacitor, it will work just fine.


## Mechanical Details

CM3015 devices are available in a 5-lead SOT23 package, a 6-lead SOT23 package and an 8-lead MSOP package. Dimensions are presented below and on the following pages.

### SOT23-5 Mechanical Specifications

The dimensions for the 3-lead SOT23 package are presented below.

PACKAGE DIMENSIONS						
Package	SOT23-5					
JEDEC No.	MO-178 (Var. AA)					
Pins/Leads	5					
Dimensions	Millimeters		Inches			
	Min	Max	Min	Max		
A	--	1.45	--	0.0571		
A1	0.00	0.15	0.0000	0.0059		
b	0.30	0.50	0.0118	0.0197		
c	0.08	0.22	0.0031	0.0087		
D	2.75	3.05	0.1083	0.1201		
E	2.60	3.00	0.1024	0.1181		
E1	1.45	1.75	0.0571	0.0689		
e	0.95 BSC		0.0374 BSC			
e1	1.90 BSC		0.0748 BSC			
L	0.30	0.60	0.0118	0.0236		
L1	0.60 REF		0.0236 REF			
# per tape and reel	3000 pieces					
Controlling dimension: millimeters						

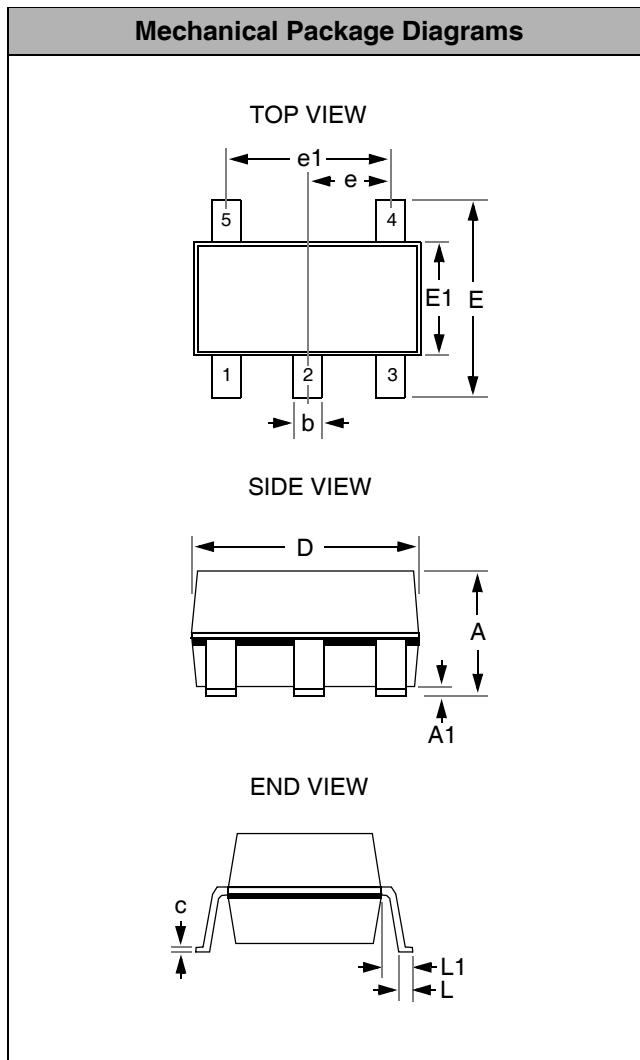


Package Dimensions for SOT23-5.

## Mechanical Details (cont'd)

### SOT23-6 Mechanical Specifications

The dimensions for the 6-lead SOT23 package are presented below.

PACKAGE DIMENSIONS						
Package	SOT23-6					
JEDEC No.	MO-178 (Var. AB)					
Pins/Leads	6					
Dimensions	Millimeters		Inches			
	Min	Max	Min	Max		
<b>A</b>	--	1.45	--	0.0571		
<b>A1</b>	0.00	0.15	0.0000	0.0059		
<b>b</b>	0.30	0.50	0.0118	0.0197		
<b>c</b>	0.08	0.22	0.0031	0.0087		
<b>D</b>	2.75	3.05	0.1083	0.1201		
<b>E</b>	2.60	3.00	0.1024	0.1181		
<b>E1</b>	1.45	1.75	0.0571	0.0689		
<b>e</b>	0.95 BSC		0.0374 BSC			
<b>e1</b>	1.90 BSC		0.0748 BSC			
<b>L</b>	0.30	0.60	0.0118	0.0236		
<b>L1</b>	0.60 REF		0.0236REF			
# per tape and reel	3000 pieces					
Controlling dimension: millimeters						

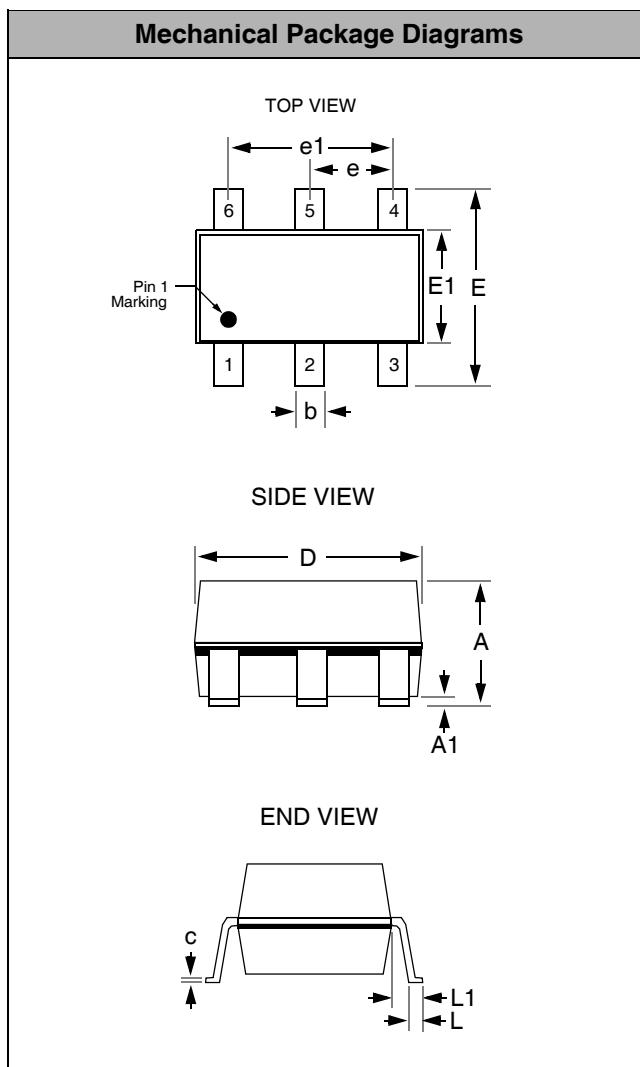

Package Dimensions for SOT23-6.


## Mechanical Details (cont'd)

### MSOP-8 Mechanical Specifications:

The dimensions for the 6-lead SOT23 package are presented below.

PACKAGE DIMENSIONS					
Package	MSOP				
Pins	8				
<b>Dimensions</b>		<b>Millimeters</b>	<b>Inches</b>		
		Min	Max	Min	Max
<b>A</b>	0.87	1.17	0.034	0.046	
<b>A1</b>	0.05	0.25	0.002	0.010	
<b>B</b>	0.30 (typ)		0.012 (typ)		
<b>C</b>	0.18		0.007		
<b>D</b>	2.90	3.10	0.114	0.122	
<b>E</b>	2.90	3.10	0.114	0.122	
<b>e</b>	0.65 BSC		0.025 BSC		
<b>H</b>	4.78	4.98	0.188	0.196	
<b>L</b>	0.52	0.54	0.017	0.025	
# per tube	80 pieces*				
# per tape and reel	4000 pieces				
Controlling dimension: inches					

\* This is an approximate amount which may vary.

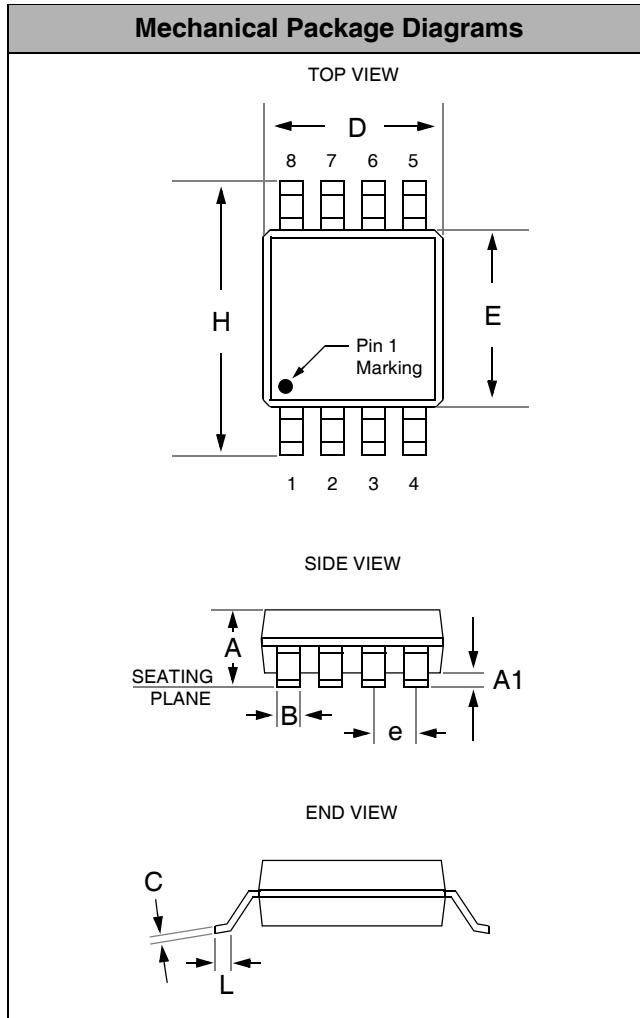

Package Dimensions for MSOP-8